

Q/L-Family

MELSEC Modular PLC

One platform –
many solutions



PLC Control / Motion / PC / Process / Multi CPU solutions /
Redundancy / IEC 61131-3 / Networking / Scalable / Machine control /
Plant management / Safety /

Global Standards



Through Mitsubishi Electric's vision, "Changes for the better" are possible for a brighter future

Manufactured to the highest standards


Mitsubishi Electric automation products enjoy a global reputation for outstanding quality and reliability. The process starts at the design stage, where quality is designed into even the smallest components. Our systematic pursuit of "best practice" means that Mitsubishi Electric products readily comply with shipping approvals, product directives and standards.

One of the world's top PLC makers

The 2004 Worldwide PLC Survey conducted by the respected American automation research company ARC confirmed that Mitsubishi Electric is the world's largest volume producer of PLCs.





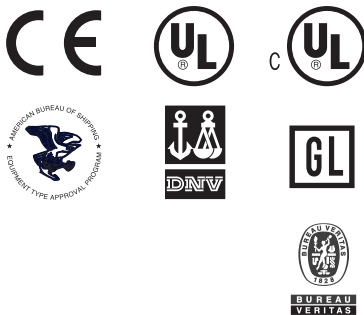






Mitsubishi Electric Corporation Nagoya Works is a factor ycertified for ISO14001 (standards for environmental management systems) and ISO9001(standards for quality assurance management systems)



Flexible automation

The MELSEC L series and MELSEC System Q provide total global solutions for a vast range of applications. Pioneered by Mitsubishi, these automation systems are modular automation platforms that bring together all features from a variety of different engineering disciplines, including traditional and advanced programmable logic controllers (PLCs), information technology, motion control and process-based control philosophies. Because the focus is on boosting productivity, these automation platforms help users reduce the total cost of ownership while increasing their return on investment.

Contents

Range overview	4	
Modular PLC	6	
Motion control	10	
Process control	12	
PC control	14	
Safety for all systems	16	
Programming	17	
Plant solutions	18	
Machine solutions	19	
Applications	20	

Section 2: Technical Informations

What makes a world beating Modular Controller?

Global use

The modular PLCs of Mitsubishi Electric will work all over the world. With the large number of marine approvals, compliance with international standards and the stringent requirements of the industry, make the modular PLC a product you can fully trust in.

Totally scalable

The modular PLCs are designed to grow with your application, from the Q00UJ standalone solution and the compact MELSEC L series to the networked and redundant process CPU Q25PRH. The concept allows additions and adjustments to your needs at any time.

Multi CPU*

The MELSEC System Q Automation Platform allows you to use multiple CPU's on a single backplane. You can combine up to four CPU types, such as PLC, Motion, PC, C-CPU and Process CPU's, as well as NC and Robots CPU's, as a single seamless solution.

* only MELSEC System Q

Single or redundant power supplies (AC or DC)

All CPU's support the same range of I/O and special function modules



Task sharing with multiple CPU's, (up to four different CPU's in a single system)
(only MELSEC System Q)

Programming via USB, Serial, Networks (CC-Link IE, CC-Link, Ethernet)



Multiple connectivity

The modular PLCs of Mitsubishi Electric can communicate easily with Mitsubishi or third party products.



Flexibility

The wide range of power supplies, CPU's, I/O modules, special function and communication modules make the modular PLCs of Mitsubishi Electric to the most flexible modular automation systems in the world.


Dual redundancy*

The redundant Process CPUs Q12/25PRH in combination with standard PLC technology can, provide a hot standby system with the automatic synchronization of data. The modular concept also allows different degrees of redundancy from power supply and processors to redundant network modules.

* only MELSEC System Q

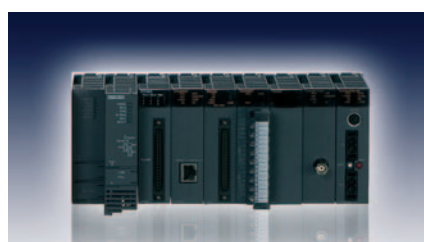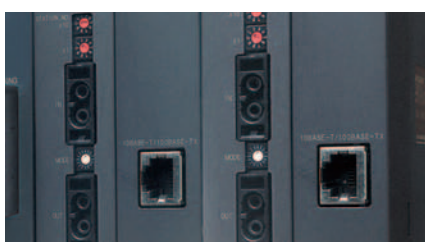

Sophisticated yet simple

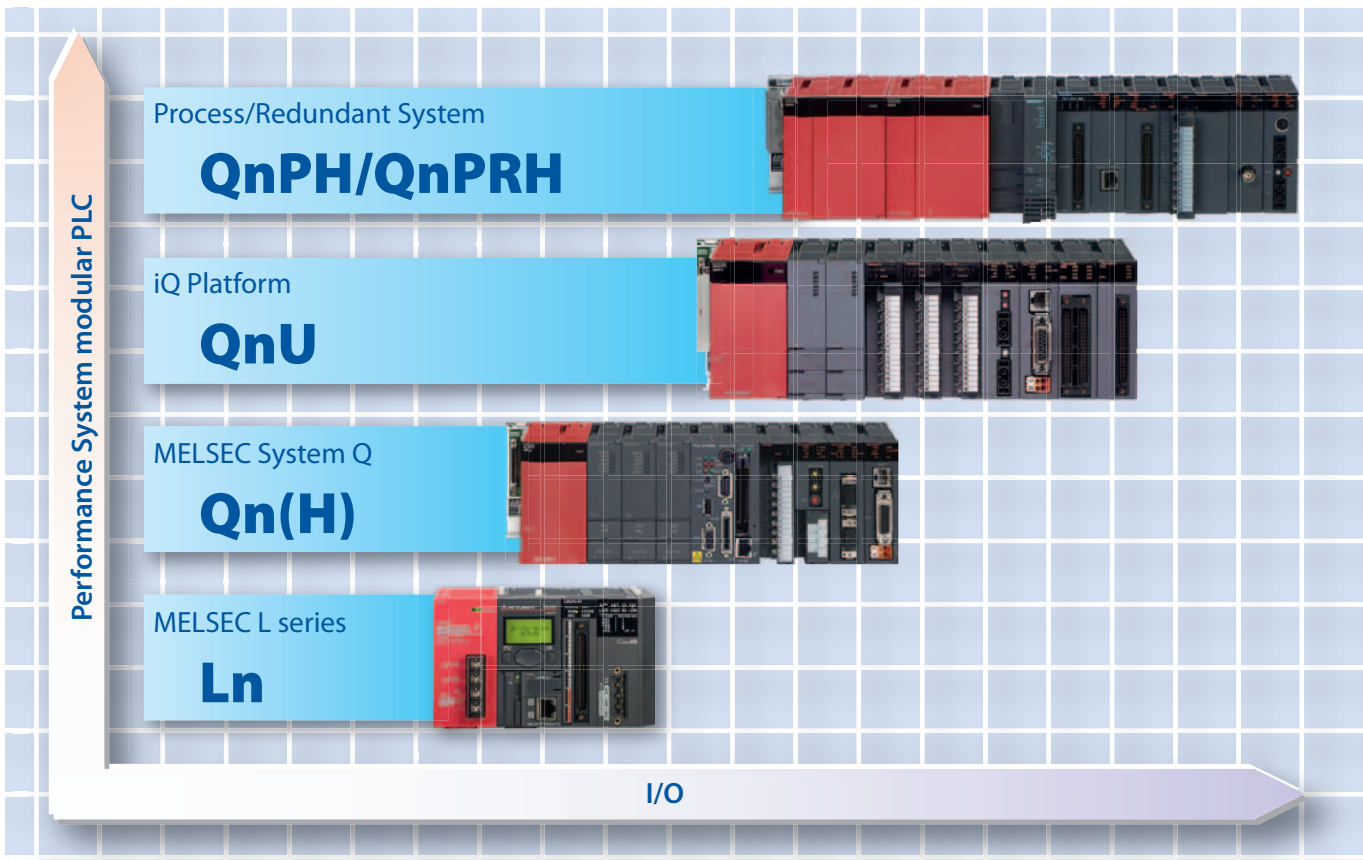

Mitsubishi Electric's modular control solutions span a wide range of capabilities.

The modular concept

This sophisticated concept of the modular PLCs from Mitsubishi Electric allows users to mix and select the best combination of CPUs, communication devices, special function modules and I/O modules. This allows users to configure systems into what they need, when they need it, where they need it.

Multiple capabilities

The MELSEC System Q allows to combine basic and advanced PLC CPUs, specialist motion and process controllers and even PC CPUs (industrial PCs) into a single System Q solution with up to four different CPU modules.

The concept of the MELSEC L series requires no rack and is ideal for medium-sized control applications. Using a simple motion module, up to 16 servo axes can be controlled here too.

This range of options gives the user a wide range of control philosophies, programming concepts and languages.

Flexible and scalable

An automation platform for the future


Flexibility and scalability are the key design features that enable the modular PLCs to be a truly powerful automation platform. Users can apply simple control to an individual machine or integrated plant wide management all from the same hardware base.

The modular PLC is supported by several software tools which enable easy and comprehensive integration using Mitsubishi Electric's EZSocket middleware. In addition, Mitsubishi Electric also offer software tools that comply with international standards such as IEC 61131-3, OPC and Active X. This tremendous flexibility permits users to reduce development time, simplify commissioning, and provide ongoing system maintenance.

Proven technology

Experience and expertise have made Mitsubishi Electric one of the world's largest manufacturers of programmable logic controllers. PLC systems from Mitsubishi Electric are forerunners in new technologies and are distinguished by exceptional reliability and performance.

However, Mitsubishi Electric is not only a major provider of automation solutions. As is all too frequently forgotten, being one of the largest manufacturing companies in the Japanese and Asiatic economy, it is itself a user of these solutions. From this unique position, Mitsubishi Electric can understand the requirements of other manufacturers only too well. This enables it to sharpen its profile and achieve the optimum balance between cost control and investment.

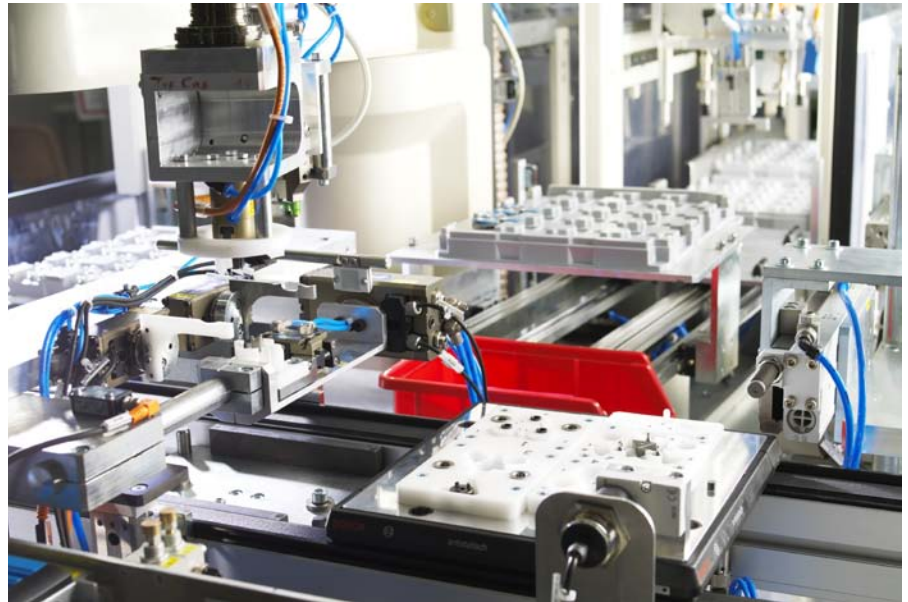


The modular PLCs are characterized by high flexibility and easy extensibility, offering the vital advantage in manufacturing.

What you can expect

- Mitsubishi Electric modular PLC systems meet tomorrow's market requirements today.
- Safe investment thanks to sophisticated and reliable technology.
- The controllers comply with all international quality standards, confirmed by certificates and approvals.
- Standard products, such as control devices and process visualisation software, can be easily combined with all MELSEC controllers.
- Extensive system compatibility.
- European and worldwide availability guaranteed via close-knit sales network.
- Worldwide support and service

The CPUs of the MELSEC System Q

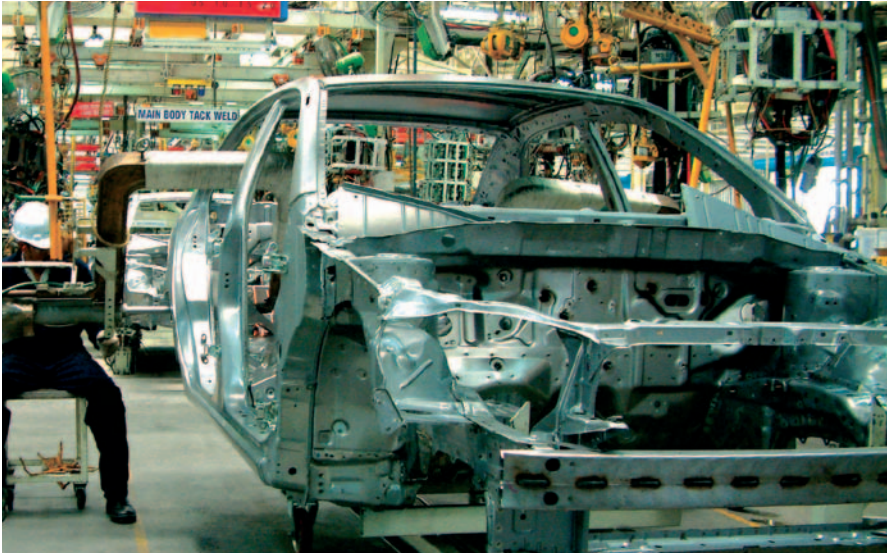

Reliable control when you need it most.



Multi CPUs can make light work of complex tasks

Basic PLCs

Not every control application requires the full power of MELSEC System Q. For example, many machine builders embed control technology into their machines and require small compact designs featuring flexible high-speed operation. MELSEC System Q's Basic PLC CPUs offer just this kind of solution, balancing power and performance against cost. A good example of this is the Q00J CPU.

This all-in-one unit provides power supply, CPU and backplane as a single, ready-to-use unit ideal for small systems that still require powerful performance.

Other Basic PLC CPU options include the classic modular designs Q00 and Q01, the first steps on the path to the full MELSEC System Q automation platform.

Advanced PLCs

For advanced machine designs and controlling manufacturing cells, including infrastructure and site-wide management, MELSEC System Q's advanced PLC CPUs offer incredible performance and versatility.

Processors are available with a wide range of memory capacities, all of which can be expanded as required. This means that MELSEC System Q PLCs can support complex programs as well as store large volumes of operation data.

Universal PLC CPUs

These universal PLC CPUs are the latest generation of modular CPUs for the MELSEC System Q controller platform and they are the foundation of the iQ Platform system. They can be combined with the motion, robot and NC CPUs to configure scalable and highly flexible modular automation systems.

Scalable

With the exception of the embedded Q00J CPU, all MELSEC System Q PLC processors are interchangeable, which means processing power can be increased as applications grow, protecting your investment in infrastructure and hardware.

Multi Processor support

Up to four separate MELSEC System Q PLC CPUs can be placed in a single system. These can be used to control their own set of dedicated tasks or for sharing the processing and control load, making the total system highly responsive. This provides users with faster, more dynamic control, leading to better production quality and improved production rates.

Robots and NC CPUs

Robots and CNC controllers combine faster processing speed and enhanced motion control, providing superior flexibility and performance when designing Motion and Robot automation systems.

PLC CPU overview					
CPU type	Basic PLC	Advanced PLC	Universal PLC	Robot CPU	NC CPU
Model range	Q00J-Q01	Q02-Q25H	Q00UJ-Q02U Q03UD(E)-Q100UD(E)H	Q172DCCPU	Q173NCCPU
Total inputs/outputs	256-1024/2048	4096/8192	256-4096/8192	32-256	4096/8192
Memory capacity	58-94 kB	32 MB	32 MB	2 MB	*
Program memory	8-14 k steps	28-252 k steps	10-1000 k steps	26 k steps	260 k steps
Program cycle period per logical instruction	0.20-0.1 μs	79-34 ns	9.5-120 ns	*	*
Multi CPU capability (Max. 4 CPUs)	Yes on Q00CPU and Q01CPU	Yes - up to 4 per system	Yes - up to 4 per system	Yes - up to 3 per system	Yes - up to 2 CPU

* Please check dedicated manuals

The compact modular MELSEC L series

Reliable, ease to use and flexible

The modular MELSEC L series has been designed with high reliability, user friendliness and flexibility in mind and has built-in functions that are usually found only in compact PLCs. Engineers and programmers can use their time more efficiently, saving valuable development time. Thanks to its sophisticated approach, the L series can be used at low costs and with minimum space requirements in a variety of applications. A system that easily fits perfectly in every respect.


High system flexibility

The rack-free design promotes high system flexibility with minimum form factor. The single-CPU architecture includes built-in Ethernet and Mini-USB interfaces, a SD/SDHC memory card slot for program storage and data logging, and 24 digital I/O for simple high-speed counting and positioning functions.

Besides the functions already built-in, the CPU can be supplemented with up to 40 extension and special function modules for additional digital and analog I/Os, high-speed counters, communications interfaces, Simple Motion, positioning etc.

Built-in I/O functions

The L series CPU has all the most important features normally needed already built-in. This minimizes hardware and engineering costs significantly. Up to 2 servo axes or stepper motors can be controlled via the integrated pulse outputs without the need for additional modules.

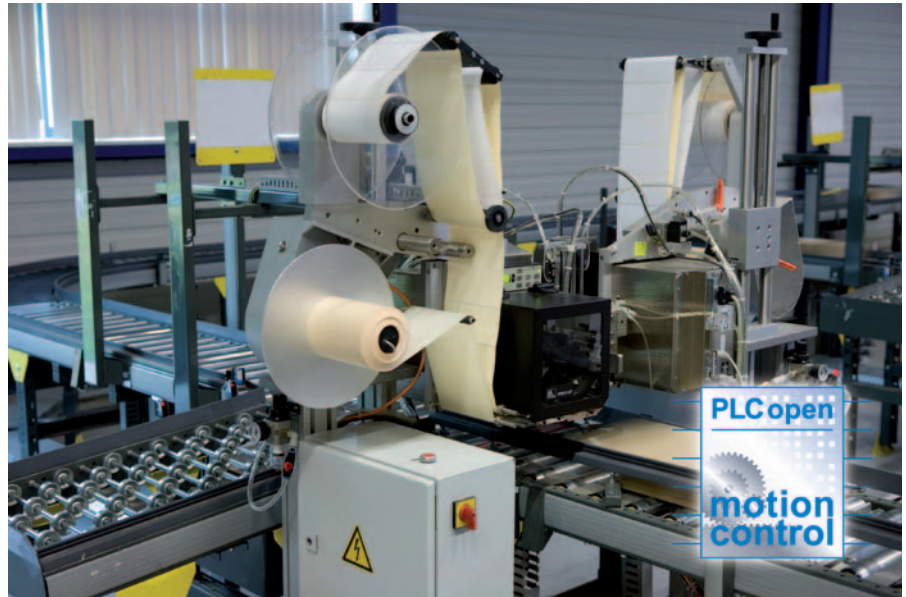

Labelling machine controlled by a L series PLC in combination with a Simple Motion module.

Every MELSEC L series CPU comes with 24 points of built-in I/Os as standard. These I/O points are capable of many functions usually reserved for separate modules. Save on system costs by using the built-in functions for a variety of applications.

USB and Ethernet as standard

The built-in USB 2.0 port or Ethernet interface can be used to connect directly at the installation site. The Ethernet interface supports direct connection and does not require any configuration of the PLC or PC to operate.

Data logging

The built-in data logging function provides an easy way to collect information for troubleshooting, performance evaluation, and other uses. The included configuration tool makes setting up the data logging function a breeze with a step-by-step wizard like interface. Using the software GX LogViewer, the captured data is easy to interpret and understand.


MELSEC L series PLC CPU		
CPU type	Basic MELSEC L series PLC	
Model range	L02CPU-P	L26CPU-PBT
Total inputs/outputs	1024/8192	4096/8192
Memory capacity	for PLC program	20 kB
	memory card	260 kB
	Depends on the SD/SDHC memory card used	
Program memory	80 k steps	1040 k steps
Program cycle period per logical instruction	40 ns	9.5 ns
Multi CPU capability (Max. 4 CPUs)	No	
Built-in functions	integrated I/Os ^①	16 inputs (24 V DC)/8 outputs (5–24 V DC, 0.1 A per channel) I/O functions: digital I/Os, high-speed counter inputs, pulse chain output for positioning
	Ethernet connectivity	10BASE-T/100BASE-TX (10/100MBit/s)
	CC-Link connectivity	—
		CC-LinkMaster/Local station (up to 10Mbps)

^① L02CPU-P/L26CPU-PBT with integrated source outputs

The challenge of Motion Control



Mitsubishi Electric provides a number of solutions for highly complex, networked motion tasks.

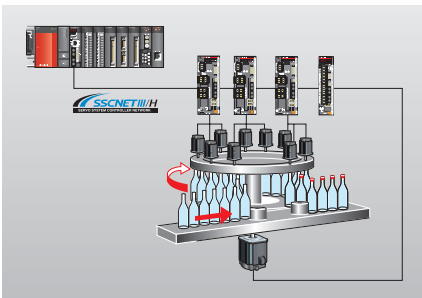

Use of a motion controller for the automatic sealing of bottles



MELSEC System Q brings machine control and motion into harmony.

Extended application range

The current trend for production systems for small quantities with a wide variety of types means that motion controllers are expected to offer a broad usage spectrum. A QDS motion system with Q17nDSCPU controller and QD77MS simple motion module enables various types of control to be implemented such as position, speed and torque control, press and power screwdriver monitoring, synchronous regulation and cam control. Possible applications for these many control types include a wide range of industrial systems such as X-Y tables, winders, packing machines and bottling machines.

Highly compatible with other products

The Q17nDSCPU motion controller and the QD77MS Simple Motion module ensure compatibility with conventional servo amplifiers and motion controllers, enabling them to continue to be used.

Reliable safety monitoring

Safety in production is an absolute must as all machines and equipment must comply with the international safety standards. The Q17nDSCPU is equipped as standard with safety functions which are certified to EN ISO 13849-1 Category 3, PL d.

User-friendly development environment

Powerful functions which have been optimised for efficiency are provided via a user-friendly development environment. These simplify system design, commissioning and fault finding, increase data security and lead to shorter downtimes.

Visualising servo data

Information on power consumption is necessary in order to save energy. The Q17nDSCPU and the QD77MS simple motion module have an optional monitoring function which can be used, for example, to read out the motor current or the total power consumption of the servo system via SSCNETIII/H. This consumption data can then be analysed on a monitor.

Reduced wiring and less space requirement

With an MR-J4 servo system, the wiring effort and the space requirement are drastically reduced. Control via the SSCNETIII bus system is much easier to set up than using a pulse train. With an MR-J4W3-B three-axis amplifier, the space requirement compared with the MR-J3-B is reduced by approx. 30 %.

Positioning with the MELSEC L series

The MELSEC L series also offers a whole range of positioning possibilities. In addition to high-speed counter modules for connection of incremental axes encoders, multi-axis positioning modules for servo or stepper drives with up to 4 axes per module are available.

4- and 16-axis Motion modules complement the existing positioning modules and round the product portfolio perfectly out. A variety of controls including positioning control, speed control, torque control, cam control and synchronous control can be achieved, which have previously only been possible with „real“ motion control systems. With the Simple Motion modules, complex motion control functions can easily be realized with simple parameter settings and a sequence program.



Servo and motion solutions are increasingly being used across many applications.



Flexible control options from a single platform.

Everything from one source

Given this wide range of high-speed counter, positioning modules and motion controllers, it is easy to see how the modular PLCs from Mitsubishi Electric can be customized to work with almost any servo manufacturer's products, as well as being totally optimized for use with Mitsubishi Electric's own advanced servo solutions.



The latest version is SSCNETIII/H, a powerful third-generation product. It enables high-speed, full duplex, transfer rates of up to 150 Mbit/s as well as guaranteed network system cycle times of 0.22 ms. This extends to all 96 axes, making sure that user applications are really synchronised over all active servo drives.

Networking: speed and reliability

SSCNET is a dedicated motion controller network developed by Mitsubishi Electric. It offers many advantages for fast, secure communications between up to 96 servo systems and their host controller.

The use of fibre-optic cabling is a great benefit to all users as it eliminates any concerns about stray electrical noise corrupting the high-speed communication process. This means SSCNETIII/H users enjoy greater reliability and flexibility since the fibre-optic cables can be placed wherever they're needed – even alongside large electrical motors.

Positioning modules overview												
Control method	Open collector				Differential output			Network				
								SSCNETIII/H	SSCNETIII		SSCNET	
Model	QD75P	QD70P	QD72P3C3 ^①	LD75P	QD75D	QD70D	LD75D	QD77MS	LD77MH	QD75MH	QD74MH	QD75M
Control axes options	1, 2, and 4	4 and 8	3	1, 2 and 4	1, 2 and 4	4 and 8	1, 2 and 4	2, 4 and 16	4 and 16	1, 2 and 4	8 and 16	1, 2 and 4
Control units	mm, inch, pulse and degree	pulse	pulse	mm, inch, pulse and degree	mm, inch, pulse and degree	pulse	mm, inch, pulse and degree	mm, inch, pulse and degree	mm, inch, pulse and degree	mm, inch, pulse and degree	pulse	mm, inch, pulse and degree
Number of positioning data items	600 data items/axes	10 data items/axes	1 data item/axis	600 data items/axes	600 data items/axes	10 data items/axes	600 data items/axes	600 data items/axes	600 data items/axes	600 data items/axes	32 data items/axes	600 data items/axes

^① with build-in counter function

MELSEC System Q

process control you can count on



Reliable system operation is essential in the process industry.

A platform to build on

The strength of MELSEC System Q's automation platform really comes into its own in traditional specialist industries. The unique flexibility of proven off-the-shelf control components such as I/O and communication devices, teamed with dedicated special devices like process CPUs, assures high functionality, ease of use and targeted control – all within budget.

Two worlds meet

Our dedicated MELSEC System Q process CPUs build on the already high functionality of Mitsubishi's advanced PLC CPUs. This powerful combination of sequential control overlaid with dedicated process instructions gives users a hybrid control solution with the best of both worlds.

This is complemented in turn by a range of dedicated channel-isolated and high-resolution analogue modules. Here, too, a combination of specialized and standard modules as well as HART protocol supporting analog I/O's provide the basis for practical and flexible solutions.

High system availability can be maintained through various means, including redundant process CPUs, stand-by network masters, and redundant network configurations, as well as by wire-break detection and a "hot-swap" capability that allows modules to be replaced during live operation.

Programming can be implemented using a wide range of tools such as IEC 61131-3 compliant software and the process-dedicated PX Developer.

Process CPUs

MELSEC System Q's Process CPUs bring the benefits of standard MELSEC System Q technology into the process environment, reducing both implementation and long-term running costs. These powerful processors combine standard PLC control with 52 dedicated process control functions, including loop controls with two degrees of freedom (DOF) and high-speed PID control.

Redundant CPUs

Mitsubishi Electric's dual-redundant CPUs bring an additional layer of fault tolerance to the control of a whole system. This results in high reliability: if the main CPU, power supply or base unit fails, a secondary system starts immediately (within 21 ms) from the same control point.

For users this has two major benefits: no operational damage due to a single system failure, and production that continues seamlessly.



The high availability of the dual redundant MELSEC System Q can be applied to a wide range of industries from Food and Utilities to Process, and Chemical.

High reliability systems

The MELSEC System Q automation platform can also be applied to other areas requiring high reliability, e.g. standby network masters, redundant fieldbus (CC-Link) and redundant power supplies for remote I/O stations.

In addition, selected analogue and temperature control units have a wire-break detection feature enabling them to determine the difference between an actual signal and one that has been lost due to external system damage.



Complex processes involving liquids, pressures, temperatures can often need fast PID control algorithms.

Overview of process CPUs						
CPU type	Process CPU				Redundant CPU	
Model	Q02PHCPU	Q06PHCPU	Q12PHCPU	Q25PHCPU	Q12PRHCPU	Q25PRHCPU
Total inputs/outputs	4096/8192					
Memory capacity	32 MB					
Program memory	28 k steps	60 k steps	124 k steps	252 k steps	124 k steps	252 k steps
Program cycle period per logical instruction	34 ns					
Multi CPU capability (max. 4 CPUs)	Yes – up to 4 per system				No	

IT for support, monitoring and control



Integrated, embedded or networked – IT is the link from the operational environment to the management function.



Flexible and secure PC technology can even be placed within an application.



MELSEC System Q's C controller adds a whole new dimension to flexible control

Information technology has emerged as the prime conduit linking the operational site to the management function. Not only can production data, schedules and quality information be shared; maintenance and operations can be activated over the same structures.

Industrial strength IT

MELSEC System Q is unique in being able to embed a fully equipped Windows® PC into a robust industrial design directly at the heart of the control system. The potential uses and benefits are enormous: users are completely free to write their own control and directly actuate I/O control.

Alternatively, the PC CPU can be used as an embedded process monitoring point, running a SCADA installation or user-created Visual Basic applications.

With its fanless design concept, the PC CPU is designed to have as few moving parts as possible, as these are often the points of operational failure. In fact, this principle extends to the optional silicon hard drive, which has no moving parts at all, making Mitsubishi Electric's MELSEC System Q PC CPU ideal for an industrial environment.

This rack-based PC solution can be used as a stand-alone controller or in conjunction with any other MELSEC System Q CPU to create a multidisciplinary automation platform.

As easy as A, B, C

If MELSEC System Q's automation platform is divided into A for PLC CPUs, and B for process CPUs, then C must surely stand for the industrial "C" controller.

This advanced controller can be programmed in standard C or C++, opening up the world of automation and control directly to non-PLC based engineers. Furthermore, "C" programming is an ideal language for many process or complex math-based applications since it has a well-defined structured programming concept and flexible syntax.

The Q12DCCPU-V module has been meticulously designed to eliminate as many failure-prone elements as possible, including fans and hard drives. Combined with the widely used VxWorks operating system from Wind River, this makes Mitsubishi Electric C controller a powerful CPU fit for industrial environments. In addition, programming support for the CODESYS controller development system is available from 3S-Smart Software Solutions, which provides users with convenient object-oriented environments.

Based on the Q12DCCPU-V a connection also to Profinet and in combination with a partner solution to Ethernet/IP was realized.

Remote management

MELSEC System Q offers various solutions to the problem of remote management. These can be used independently or combined into multifunction systems.

Networking

MELSEC System Q supports over 50 different types of networking and communications modules, including Ethernet, CC-Link, CC-Link IE, CC-Link IE Field, CC-Link Safety, MELSECNET/H, FL-NET, Profibus DP, DeviceNET, AS-interface, Modbus TCP and Modbus RTU.

Thanks to MELSEC System Q's single automation platform, communication is as easy as selecting the module you need.

Webserver

The QJ71WS96 is a dedicated webserver module that fits directly onto the MELSEC System Q backplane. It offers on-board web-pages as well as Java scripting and 100 MB Ethernet that make it easier than ever to share information.

MES Interface

With the QJ71MES96 module MELSEC System Q users now have the possibility to connect directly with commercial database applications like Oracle, MS SQL Server and MS Access. The MES module supports bi-directional data transfer with several databases and the event-driven communications reduce the network load. The use of the MES module reduces system complexity and cost, making gateways a thing of the past.

IPC panels

Information technology also comes to the MELSEC System Q automation platform in the form of industrial personal computers (IPCs). These units provide an ideal solution for placing a PC access point directly in the production environment. Models can be connected directly to MELSEC System Q or via a network, ensuring that all areas of the operation are kept supplied with up-to-date information directly from MELSEC System Q.



Flexible and reliable communication is a key issue in many application regardless of scale and size.



Web server technology brings intuitive access directly to the heart of the control solution.

Overview of MELSEC System Q PC and C controller CPUs			
CPU type	Windows® PC	C controller	C controller
Model	Q10WCPU-W1-E/CFE	Q06CCPU	Q12DCCPU
Total inputs/outputs	1 input (shutdown), 2 outputs (shutdown, watchdog timer)	4096/8192	4096/8192
Memory capacity	4 GB, built-in SSD (Solid State Disk)	Use of storage cards means data and programs can be stored for later retrieval	Use of storage cards means data and programs can be stored for later retrieval
Program memory	1 GB (main)/32+24 kB (L1 cache)/512 kB (L2 cache)	64 MB (main)/128 kB battery backed	128 MB (main)/128 kB battery backed
Processor speed/cycle time	Intel® Atom™ Processor N450 1.66 GHz	SH RISC Processor*	SH RISC Processor*
Multi CPU capability (max. 4 CPUs)	Yes	Yes	Yes

* VxWorks real time system

Safety for all systems



Keep plant personnel safe from harm

Easy cost saving

The simplest MELSEC System Q safety option is to fit a safety relay module on the rack alongside all other system components. In this way, a system which is mostly used for conventional control can also meet safety requirements without the need for the cost of a dedicated safety controller. The safety relay modules provide the right number of safety I/O without any special programming.

If safety I/O is required in other locations around the system, safety extension I/O modules offer additional “plug and play” safety by connecting directly to the safety I/O module on the rack.

MELSEC System Q provides also the flexibility to add safety I/O modules to a conventional CC-Link network alongside other CC-Link devices such as inverters, I/O or HMI units.

Small, simple, and safe

The MELSEC WS Safety Controller provides a cost effective way to add a safety controller capability to individual machines, or smaller scale systems. Its compact size insures easy placement in most control cabinets, without adding extra cost. Configuration saves engineering time by using a graphical icon based method, and program development and certification is simplified by the use of safety function blocks.

Safeguarding large systems

The MELSEC QS Safety PLC offers a modern approach to safety by combining a CC-Link Safety distributed I/O network with the flexibility of a modular controller. This offers the capacity to cover an entire production line, while bringing the benefits of reduced wiring, rapid diagnostics and easy program modification and maintenance. Of course, since this is a safety controller however, there is a full complement of safeguards against system failure and unauthorized access.



Mitsubishi Electric provides for the MELSEC System Q a complete safety solution that can be fully integrated into the automation concept of your system. This allows visualization information, realizing optimal safety control and boosting productivity.

Flexible implementation

It's obvious that the safety solution has to protect workers from dangerous machinery and environments. However, from a cost perspective, it should also be simple to implement and flexible enough to meet the needs of any system design. MELSEC System Q meets these requirements with a unique, multi-faceted safety solution. The safety functions can either be directly mounted on the rack, be decentralized I/O, or sit on the open CC-Link Safety network.

Specify with confidence

The MELSEC System Q safety solution has been fully certified by all applicable safety organizations to EN 954-1 Category 4, ISO 13849-1 PL e, and IEC 61508 (JIS C 0508) SIL 3 and certified by TÜV Rheinland.

Programming and visualisation

One of the largest cost components of any project is not the control hardware but the time required to create and write the application. Mitsubishi Electric's MELSOFT software solutions help you save time by making it easier to reuse existing work, as well as making interfaces simpler and more intuitive. In addition, MELSOFT provides innovative tools to help users increase their productivity in planning, implementation, service and support.

■ Programming

Three software packages are available: one in standard Mitsubishi Electric format, another in compliance with IEC 61131-3, and a third one for process control applications. This enables customers to choose the best solution for their needs. Mitsubishi Electric's programming solutions help you save time by making it easier to reuse existing programming code; they also have simple, intuitive interfaces.

■ Communication

MELSOFT communication packages are designed to integrate Mitsubishi Electric products with other software packages by using plug-ins or drivers. The user benefits from the reliability and quality of Mitsubishi Electric hardware combined with the familiarity of software tools such as Microsoft Excel, Active X and OPC.



Mitsubishi Electric's MELSOFT suit of software tools brings productivity and ease of use.

■ Visualization


Mitsubishi Electric supplies both SCADA- and PC-based HMI solutions for data analysis, maintenance and linking into other high-end business operations packages.

Human Machine Interfaces

In addition to software visualization solutions, Mitsubishi Electric offers one of the world's widest ranges of HMI, GOT and IPC technologies. Solutions range from simple small text screens all the way through to high-resolution touch screens and full-fledged industrial PCs, complimenting the range and power of MELSEC System Q. Thus, the range and performance of the modular PLCs of Mitsubishi Electric is completed.




GOT1000 displays offer high resolution and touch screen technology.

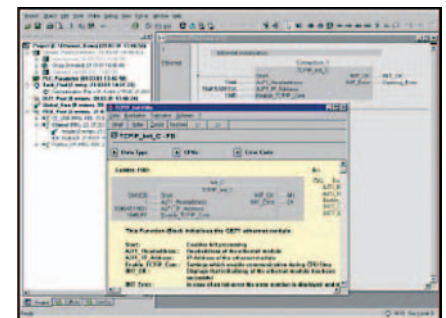

Advanced software packed in an easy to use interface.

Package	GX Works2	PX Developer	iQ Works
IEC 61131-3 compliance	Yes	No	Yes
Languages	KOP/AWL/FBD/ST/AS	KOP/AWL/AS	KOP/AWL/FBD/ST/AS
Simulator	Yes	No	Yes
Special function block setup utilities	Yes	Yes	Yes
HMI programming	No	No	Yes
Motion CPU programming	No	No	Yes

Plant solutions

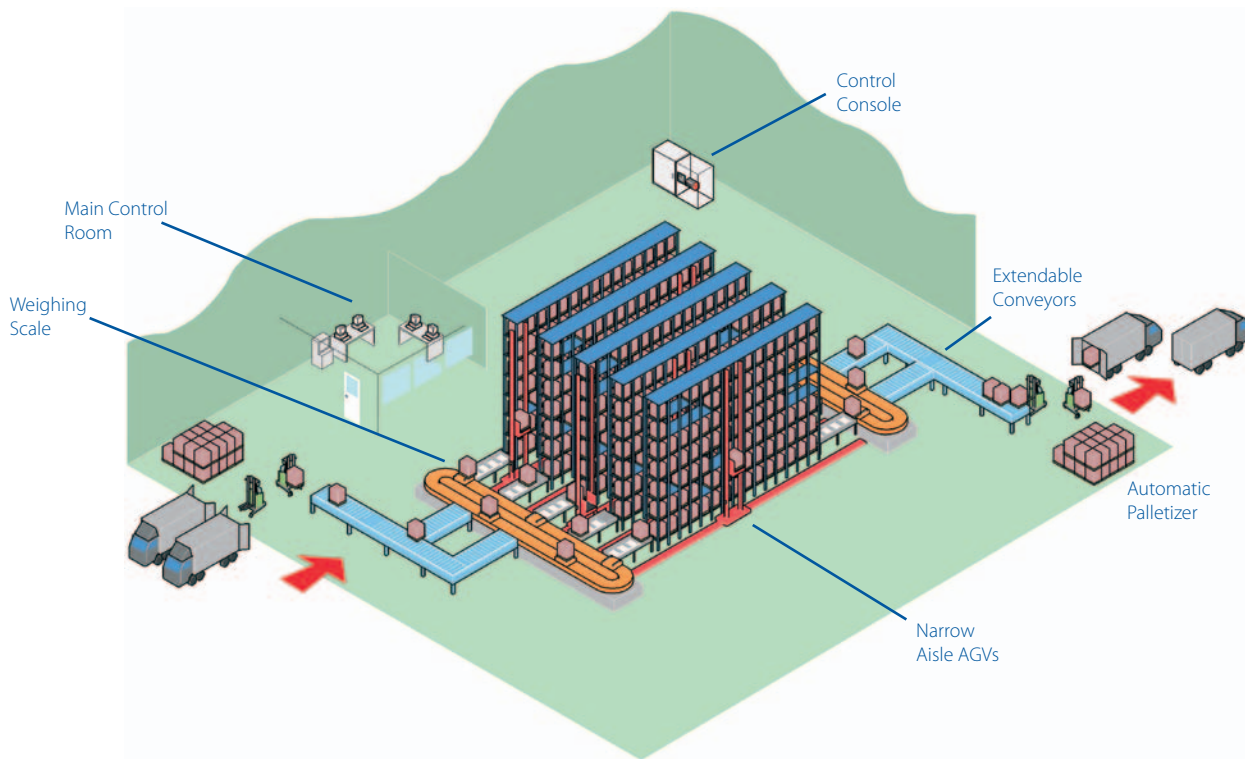

Optimal operation occurs when all elements within a plant are kept constantly running, this can only be achieved with reliable co-ordination and integration.



e-F@ctory turns the idea into a reality.

Companies often mull over and discuss factory or plant-wide management solutions for many years – but without ever actually implanting them. After all, they are understandably reluctant to halt production for an extended period while the new system is being fitted, and find the prospect of organizing and planning the whole activity daunting, especially since they often want to implement a new solution all at once.

e-F@ctory

Mitsubishi Electric's e-F@ctory solution answers a lot of these issues. It is based on the MELSEC System Q automation platform concept. Thanks to MELSEC System Q's modular design, it is now much easier to implement plant-wide control based on segmented or manufacturing cell solutions.

Communication

Plant-wide operations rely on good communication strategies. MELSEC System Q's automation platform can support over 50 different forms of communication, including standard RS232, fieldbuses, Ethernet, web-servers and redundant networks.

Making life easy

Traditionally, the interface between MES and the production environment has been separated by a layer of management PCs and master PLCs used for concentrating data and cell information. With MELSEC System Q's automation platform, this structure can be simplified by embedding the PC directly on the same backplane. This removes a layer of management structure as well as simplifying implementation.

Each customer's requirements are different and MELSEC System Q is designed to offer a wide range of solutions that can be easily adapted. For example, MELSEC System Q enables the use of local embedded web-server technology, meaning that Ethernet and web-based browsing can be used for capturing data. Moreover, a dedicated MES interface allows MELSEC System Q to "talk" directly to the MES software without any intermediary devices, reducing implementation and on-going maintenance costs.

Machine solutions

Each machine presents different challenges to the control system. Sometimes high quantities of I/O are required locally or are networked. Small controller size is often important, while at other times the key factors will be temperature, positioning, or analogue control.


For the machine designer, an ideal solution is to have a standard control philosophy that can be adapted to each machine's individual needs. This is exactly what MELSEC System Q brings to machine control. This is exactly what the modular PLCs of Mitsubishi Electric bring to machine control.

Compact

Due to its modular design, the modular PLCs from Mitsubishi Electric use less panel space than many other controllers. In addition, Mitsubishi Electric offers a wide range of high-density I/O cards and analogue modules that are ideal for minimizing installation space. For very compact installations, the rack-free PLC of the MELSEC L series is the ideal choice, which can additionally be enhanced by network modules or remote I/Os.

Flexible

When designing a control system for a given machine, flexibility is often a key requirement. Many machine manufacturers develop ranges of products which require a basic control concept to which additional features can be added as machine performance increases. Considering that, the modular PLCs of Mitsubishi Electric are ideal.

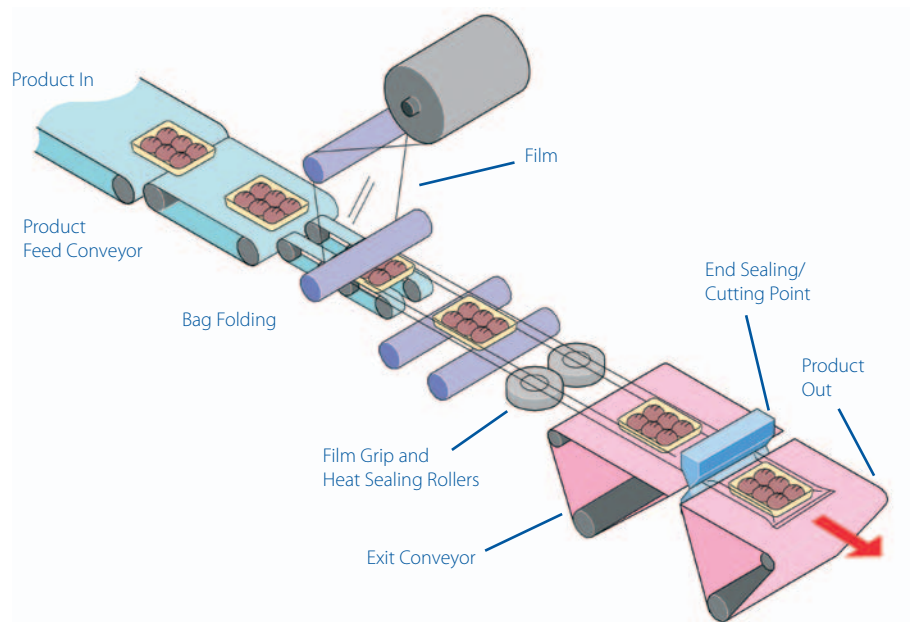

A horizontal packaging machine can present many challenges to the automation engineer.

The modular PLCs from Mitsubishi Electric encompass a wide range of modules, including various types of temperature and analogue modules, different positioning modules and a wide range of communication devices. These modules can be combined with all CPUs.

Easy programming

One of the largest costs in any control solution is the programming and engineering time. The modular PLCs from Mitsubishi Electric overcome this problem with user-friendly, intuitive programming tools. With all that, reusable program components and the use of function blocks and the sequential function chart were placed in the foreground. Embedded set-up tools support this process, making the configuration of special function modules simple, quick, and easy.



Example of temperature control.

A world of applications




Plant control solutions



Remote management solutions include SCADA, Networking, Telemetry and Industrial Modems.

Mitsubishi Electric products are found in an almost infinite variety of industrial, infrastructure and service sector contexts, ranging from critical applications in the pharmaceuticals industry to state-of-the-art leisure and entertainment facilities. Here are just a few examples of recent applications:

- Food and drink
 - Bread manufacture (mixing/baking)
 - Food processing (washing/sorting/slicing/packaging)
- Leisure
 - Multiplex cinema projection
 - Animated mechatronics (museums/theme parks)
- Medical
 - Respiration machine testing
 - Sterilization
- Pharmaceutical/chemical
 - Dosing control
 - Pollution measurement systems
 - Cryogenic freezing
 - Gas chromatography
 - Packaging
- Plastics
 - Plastic welding systems
 - Energy management systems for injection moulding machines
 - Loading/unloading machines
 - Blow moulding test machines
 - Injection moulding machines
- Automotive
- Printing
- Textiles
- Transportation
 - Sanitation on passenger ships
 - Sanitation on rail rolling stock
 - Fire tender, pump management
 - Waste disposal truck management
- Utilities
 - Waste water treatment
 - Fresh water pumping
 - Sewage plants
- Agriculture
 - Irrigation systems
 - Plant handling systems
 - Sawmills
- Building management
 - Smoke detection monitoring
 - Ventilation and temperature control
 - Lift (elevator) control
 - Automated revolving doors
 - Telephone management
 - Energy management
 - Swimming pool management
- Construction
 - Steel bridge manufacturing
 - Tunnel boring systems

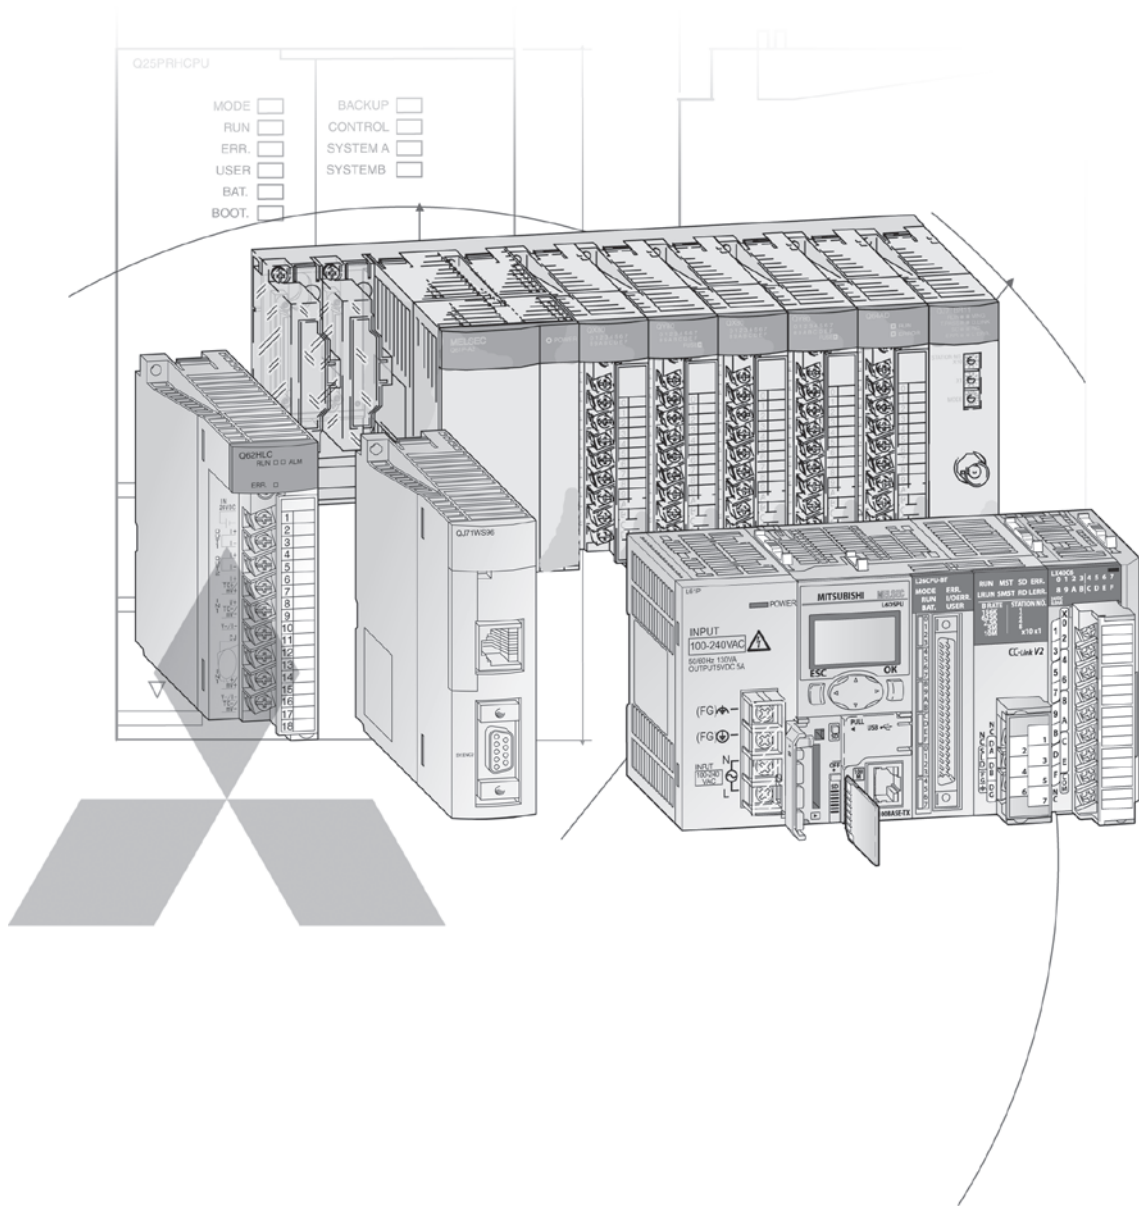

Technical Information Section

Further Publications within the Industrial Automation Range

Brochures

FX Family

Product catalogue for programmable logic controllers and accessories for the MELSEC FX family

HMI Family

Product catalogue for operator terminals, supervision software and accessories

FR Family

Product catalogue for frequency inverters and accessories

MR Family

Product catalogue for servo amplifiers and servo motors as well as motion controller and accessories

Robots Family

Product catalogue for industrial robots and accessories

LVS Family

Product catalogue for low voltage switchgears, magnetic contactors and circuit breakers

Automation Book

Overview on all Mitsubishi Electric automation products, like frequency inverters, servo/motion, robots etc.

More information?

This product catalogue is designed to give an overview of the extensive range of System Q and L series of MELSEC PLCs. If you cannot find the information you require in this catalogue, there are a number of ways you can get further details on configuration and technical issues, pricing and availability.

For technical issues visit the www.mitsubishi-automation.com website. Our website provides a simple and fast way of accessing further technical data and up to the minute details on our products and services. Manuals and catalogues are available in several different languages and can be downloaded for free.

For technical, configuration, pricing and availability issues contact our distributors and partners. Mitsubishi Electric partners and distributors are only too happy to help answer your technical questions or help with configuration building. For a list of Mitsubishi Electric partners please see the back of this catalogue or alternatively take a look at the "contact us" section of our website.

About this product catalogue

This catalogue is a guide to the range of products available. For detailed configuration rules, system building, installation and configuration the associated product manuals must be read. You must satisfy yourself that any system you design with the products in this catalogue is fit for purpose, meets your requires and conforms to the product configuration rules as defined in the product manuals.

Specifications are subject to change without notice. All trademarks acknowledged.

© Mitsubishi Electric Europe B.V., Factory Automation - European Business Group

MELSEC System Q

1 SYSTEM DESCRIPTION AND BASIC COMPONENTS

♦ Introduction of MELSEC System Q	6
♦ Configuration and handling	12
♦ Networks	14
♦ Base units	16
♦ Power supply modules	18
♦ CPU modules	19

2 DIGITAL MODULES

♦ Input modules	28
♦ Output modules	30

3 SPECIAL FUNCTION MODULES

♦ Analog modules	32
♦ Temperature control modules	37
♦ Load cell module	38
♦ Analog CT input module	39
♦ Loop control module	40
♦ Counter modules	41
♦ Positioning modules	42
♦ Interface modules	47
♦ Network modules	49
♦ High speed data logger module	52
♦ Multi-function counter/timer module	53
♦ Interrupt module and high-speed inputs	54

4 ACCESSORIES

♦ Dummy module, ERNT – conversion adapters	55
♦ Cables and connectors	56
♦ Memory cards, adapter	58
♦ Batteries	59
♦ Terminal blocks	60

5 DIMENSIONS

♦ Dimensions	61
--------------------	----

MELSEC L Series

6 SYSTEM DESCRIPTION AND BASIC COMPONENTS

- ◆ Introduction of MELSEC L series65
- ◆ Configuration and handling.....66
- ◆ Power supply modules.....69
- ◆ CPU modules.....70

7 DIGITAL MODULES

- ◆ Input modules.....71
- ◆ Output modules.....72

8 SPECIAL FUNCTION MODULES

- ◆ IO-Link module73
- ◆ Analog modules74
- ◆ Temperature control modules.....76
- ◆ Counter modules77
- ◆ Interface modules78
- ◆ Positioning modules79
- ◆ Simple motion modules80
- ◆ Network modules.....81
- ◆ Serial communication adapter and end cover.....83

9 ACCESSORIES

- ◆ Display module, memory cards, batteries84
- ◆ Branch-/extension modules, extension cables85

10 DIMENSIONS

- ◆ Dimensions.....86

PROGRAMMING SYSTEMS

11 PROGRAMMING

- ◆ Software, iQ Works.....88
- ◆ Visualisation software.....90
- ◆ Profibus software.....91

APPENDIX

- ◆ Index.....92

Automation Platform MELSEC System Q

Description

With the MELSEC System Q, Mitsubishi Electric presents its most powerful and compact modular PLC, with multiprocessor technology for present and future challenges.

The small size, the communications capability and the high-performance multiprocessing are three important characteristics of the MELSEC System Q. Its compactness ensures that it occupies less space in the switchgear cabinet and its diverse communication facilities guarantee flexibility and openness. Depending on the selected CPU type up to 4096 local and up to 8192 remote I/O points can be addressed. This controller is particularly suitable for performing medium- to high-performance automation tasks.


The individual systems can be installed in different MELSEC and open networks (e.g. MELSECNET, CC-Link, Ethernet or Profibus DP/Profinet), enabling them to communicate with one another. The number of I/Os can thus be increased several times.

Thanks to the unique combination possibilities of PLC, process, redundancy, PC/C, robot, CNC and motion CPUs a platform is available that meets every automation task.

Special features

- up to 4096 local I/Os
- up to 8192 remote I/Os
- interchangeable intelligence
- multiprocessor technology with 45 different CPU types from 9 families (PLC, process, redundancy, PC/C, motion, CNC and robots)
- wide range of communications facilities
- easy installation
- one system platform for all configurations
- innovative technology for future applications

The MELSEC PLC Family

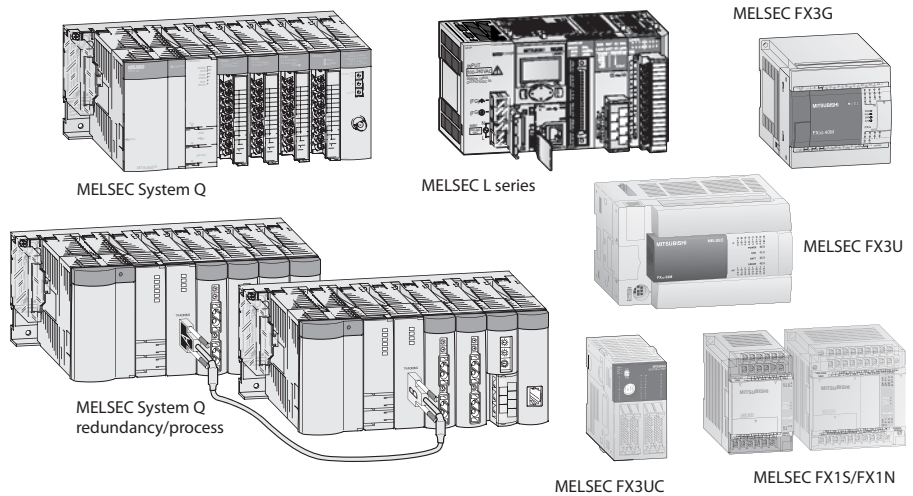

Expandability and performance

As with other Mitsubishi Electric controllers the power of the MELSEC System Q grows with your application – you simply replace or add a CPU. When using the multi processor type CPUs the control and communication tasks are shared by up to four CPUs. Every system can provide a maximum capacity of 4,096 local I/Os or 8,192 remote I/Os.

The integrated memory of up to 260 k program steps (which conforms to 1 MB RAM) can easily be expanded by up to 32 MB memory at any time just by slotting in an extension card (not for Q00(J) and Q01).

Flash ROM cards are also available for permanent storage of your controller programs for the Q02 and H type CPUs. An integrated buffer battery protects the data in the CPU's internal RAM against power failures.

The MELSEC System Q offers state-of-the-art performance by a wide range of CPU models, for all applications.

Basic PLC CPUs

CPU type	Program capacity	I/O points
Q00JCPU	8 k steps	256/2048
Q00CPU	8 k steps	1024/2048
Q01CPU	14 k steps	1024/2048

High-performance CPUs

CPU type	Program capacity	I/O points
Q02CPU	28 k steps	4096
Q02HCPU	28 k steps	4096
Q06HCPU	60 k steps	4096
Q12HCPU	124 k steps	4096
Q25HCPU	252 k steps	4096

Universal PLC CPUs

CPU type	Program capacity	I/O points
Q00UCPU	10 k steps	256/8192
Q01UCPU	15 k steps	1024/8192
Q02UCPU	20 k steps	2048/8192
Q03UDCPU	30 k steps	4096/8192
Q03UDECPU	30 k steps	4096/8192
Q04UDHCPU	40 k steps	4096/8192
Q04UDEHCPU	40 k steps	4096/8192
Q06UDHCPU	60 k steps	4096/8192
Q06UDEHCPU	60 k steps	4096/8192
Q10UDHCPU	100 k steps	4096/8192
Q10UDEHCPU	100 k steps	4096/8192
Q13UDHCPU	130 k steps	4096/8192
Q13UDEHCPU	130 k steps	4096/8192
Q20UDHCPU	200 k steps	4096/8192
Q20UDEHCPU	200 k steps	4096/8192
Q26UDHCPU	260 k steps	4096/8192
Q26UDEHCPU	260 k steps	4096/8192
Q50UDEHCPU	500 k steps	4096/8192
Q100UDEHCPU	1000 k steps	4096/8192

Process CPUs

CPU type	Program capacity	I/O points
Q02PHCPU	28 k steps	4096/8192
Q06PHCPU	60 k steps	4096/8192
Q12PHCPU	124 k steps	4096/8192
Q25PHCPU	252 k steps	4096/8192

Redundant PLC CPUs

CPU type	Program capacity	I/O points
Q12PRHCPU	124 k steps	4096/8192
Q25PRHCPU	252 k steps	4096/8192

Motion CPUs

CPU type	Program capacity	I/O points; axes
Q172DCPU	14 k steps	8192; 8
Q172DSCPU	16 k steps	8192; 16
Q172HCPU	14 k steps	8192; 8
Q173DCPU	14 k steps	8192; 32
Q173DSCPU	16 k steps	8192; 32
Q173HCPU	14 k steps	8192; 32

Special Purpose CPUs (C, Robot)

CPU type	Program capacity	I/O points
Q172DR	2 MB	4096/8192
Q12DCCPU	128 MB	4096/8192
Q173NC	230 kB (600 m)	4096/8192

PC CPU

CPU type	Program capacity	I/O points
Q10WCPU-W1-E/CFE	1 GB	1 Input (shutdown), 2 Outputs (shutdown, watchdog timer)

Equipment Features

The modular design of MELSEC System Q allows flexible usage in a broad range of applications.

The following modules are available for assembling the system:

To maximize the operational safety, all modules are isolated from the environment by means of optocouplers.

All I/O modules with screw contacts have their own removable terminal blocks which ensures easy handling during installation. The terminal block can be alternatively exchanged for a spring-loaded terminal block (optional).

Use of digital and special function modules

The use of digital and analog modules and most special function modules is dependent only on the maximum addressable number of addresses and thus on the CPU used in each case.

Pulse catch and interrupt modules

Digital input modules for pulse storage and for processing subroutines

Digital input/output modules

For various signal levels with transistor, relay or triac switches

Analog input/output modules

For processing current/voltage signals and for temperature value acquisition as well as temperature control with direct connection of Pt100 resistance thermometers or thermocouples. A HART enabled module for current input is also available.

Communications modules


Interface modules with RS232/RS422/RS485 interface for connection of peripherals or for PLC-PLC communication.

Network modules

For interfacing with Ethernet, CC-Link, CC-Link IE, Profibus DP/Profinet, Modbus TCP/RTU, DeviceNet, AS-Interface and MELSEC networks.

Positioning modules


High-speed counter modules with possibility for connection of incremental shaft encoder or multiaxial positioning modules for servo and step drives with up to 8 axes per module.

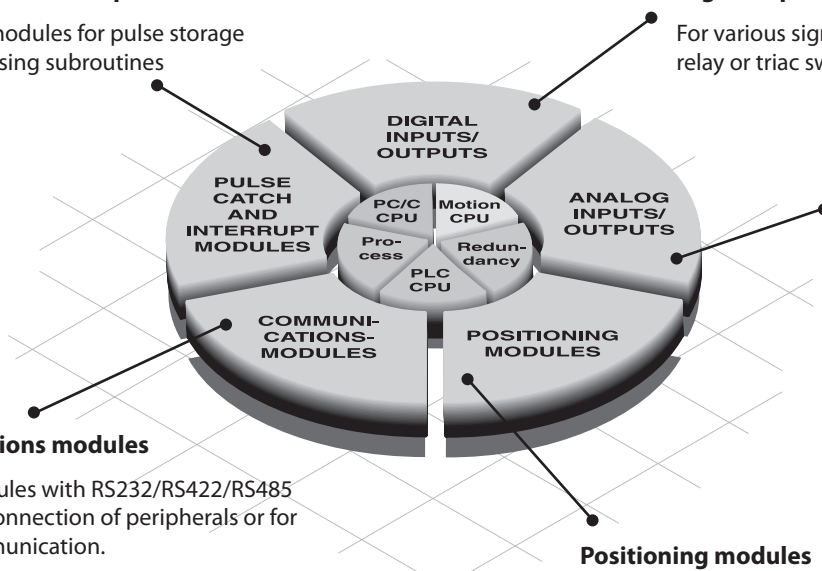

Task Management with Multiple PLC CPUs


Multiple MELSEC System Q series PLC CPUs can be used together to allow a single system to execute controls that are different in tact time, e.g. sequence control and data processing.

Thus sequence control and data processing can be distributed to different CPUs.

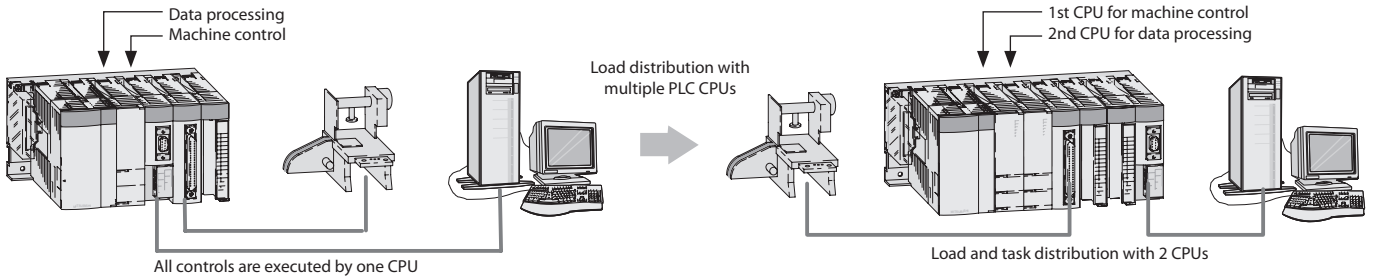

If load in excess of a CPU's processing capability is applied to a large scale system due to a large program size, using multiple CPUs to distribute the load improves the overall performance of the system.


When one process requires fast processing and the other does not, they can be handled respectively by two CPUs, providing stable and rapid control which is unaffected by the other process.

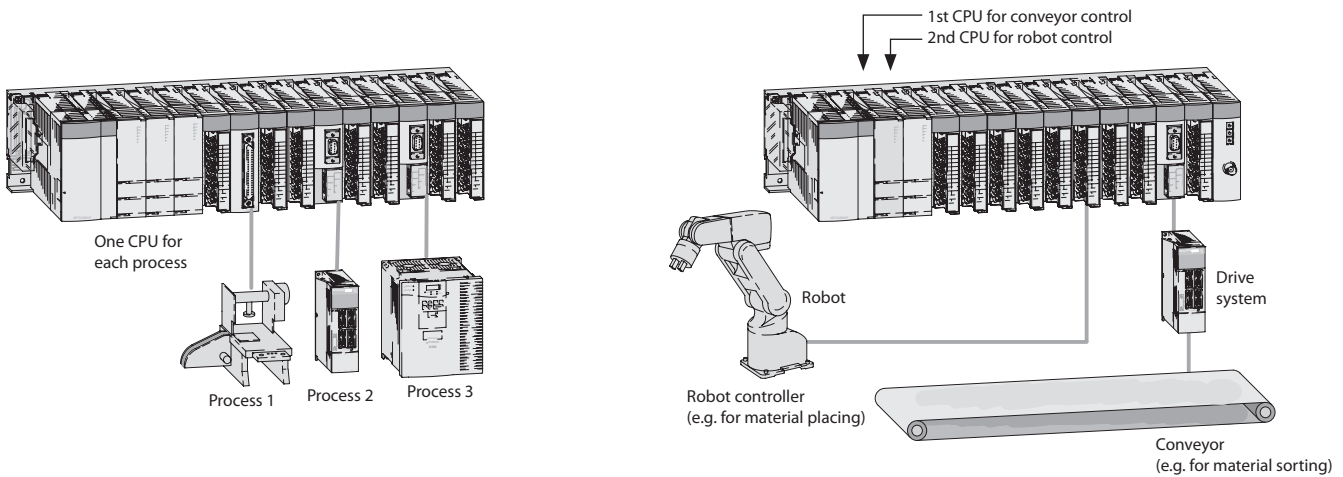

Integration of Motion CPU and Personal Computer CPU

The MELSEC System Q has the multiple CPU system function which also permits PLC CPUs and Motion CPUs to be loaded together on one base unit. While data exchange is optimized via the back bus of the base unit, space requirements and system costs are significantly reduced at the same time.

A Motion CPU can use the SSCNET that rapidly controls up to 96 axes in a single system and saves wiring. The personal computer CPU (Q-PC) enables the access to I/O modules and intelligent function modules and the communication of all CPUs with each other. When a PC/C-CPU is used the system can also be controlled with a high-level language like C++ or VB.

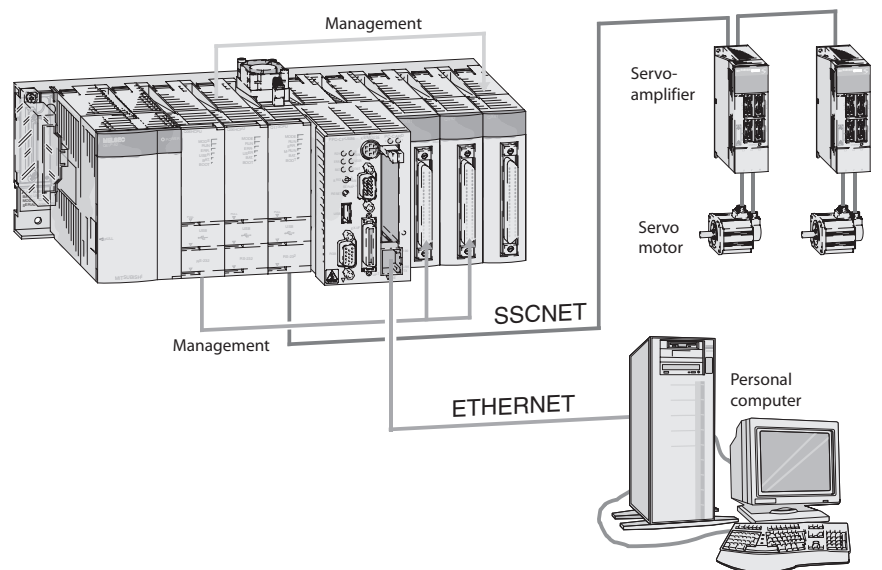


iQ Platform

Mitsubishi Electric provides all aspects of control on a consolidated automation platform. This platform not only has sequence controllers, but also other various controllers specific to an industry or application area. These are, process controller,

C language, embedded industrial PC, CNC controller, robot controller and HMI. Together with the abundant I/O that is available for this series, the iQ Platform solution can be applied to almost any kind

of application scope, with productivity kept optimum and reduced TCO being key. This is a true solution for automation, this is iQ Platform.

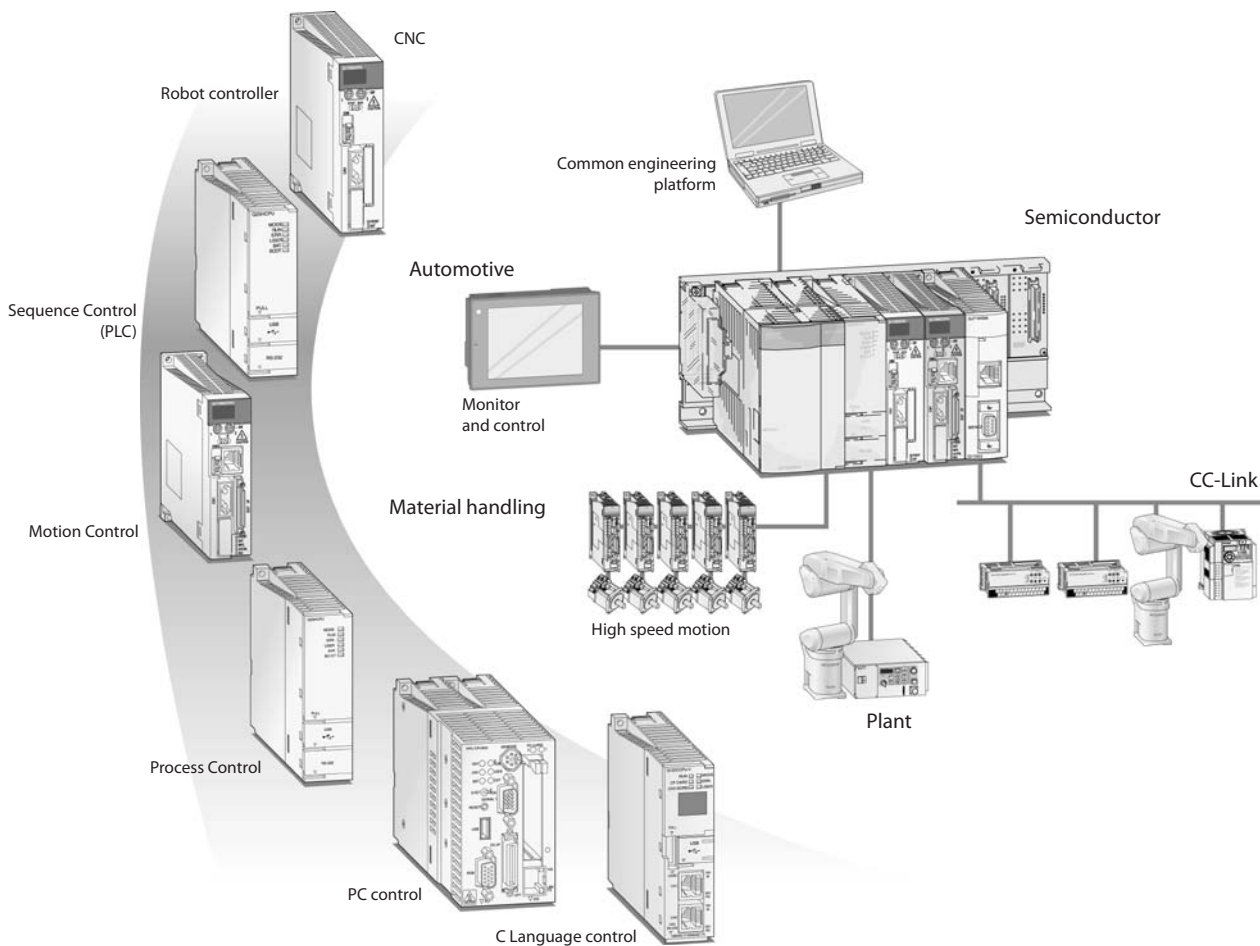


The MELSEC QS Safety Programmable Controller

Even with increasing productivity, the safety of workers operating machinery and manufacturing facilities must still always have top priority. The MELSEC System QS PLC is specially designed for managing safety systems.

It is connected to safety devices like Emergency Stop switches and light curtains and has extensive diagnostics functions that enable it to reliably switch safety-critical outputs at the right time to turn machines off in the event of danger.

The actual machinery (conveyor belts, robots etc.) is still controlled by a conventional PLC.

The MELSEC System QS PLC is compliant to the international safety standards EN954-1 Category 4, ISO13849-1 PL e, and IEC61508 (JIS C 0508) SIL 3 and certified by TÜV Rheinland.

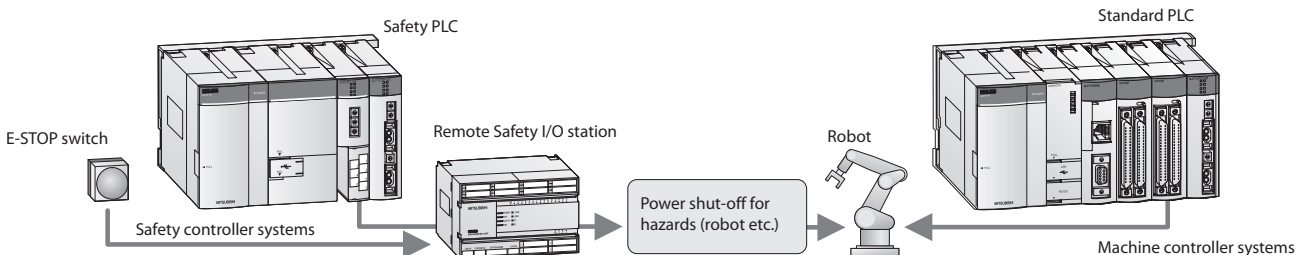

Redundant CPU


The redundant system prevents the sudden fault. An entire system including the power supply module, CPU and base unit is designed with redundancy. It provides the suitable system for diverse area of automation.

- Even if a failure occurs in the control system, the standby system takes over the control to continue the system operation.
- The Q Series products, such as I/O, intelligent and network modules, can be used without any changes (except for some modules*).

- The remote I/O reduces risks with decentralized control.
- GX Developer and PX Developer offer simple engineering environment for redundant system settings with the original operability.


* There are restrictions on the usable version when configuring a redundant system.

System configuration example

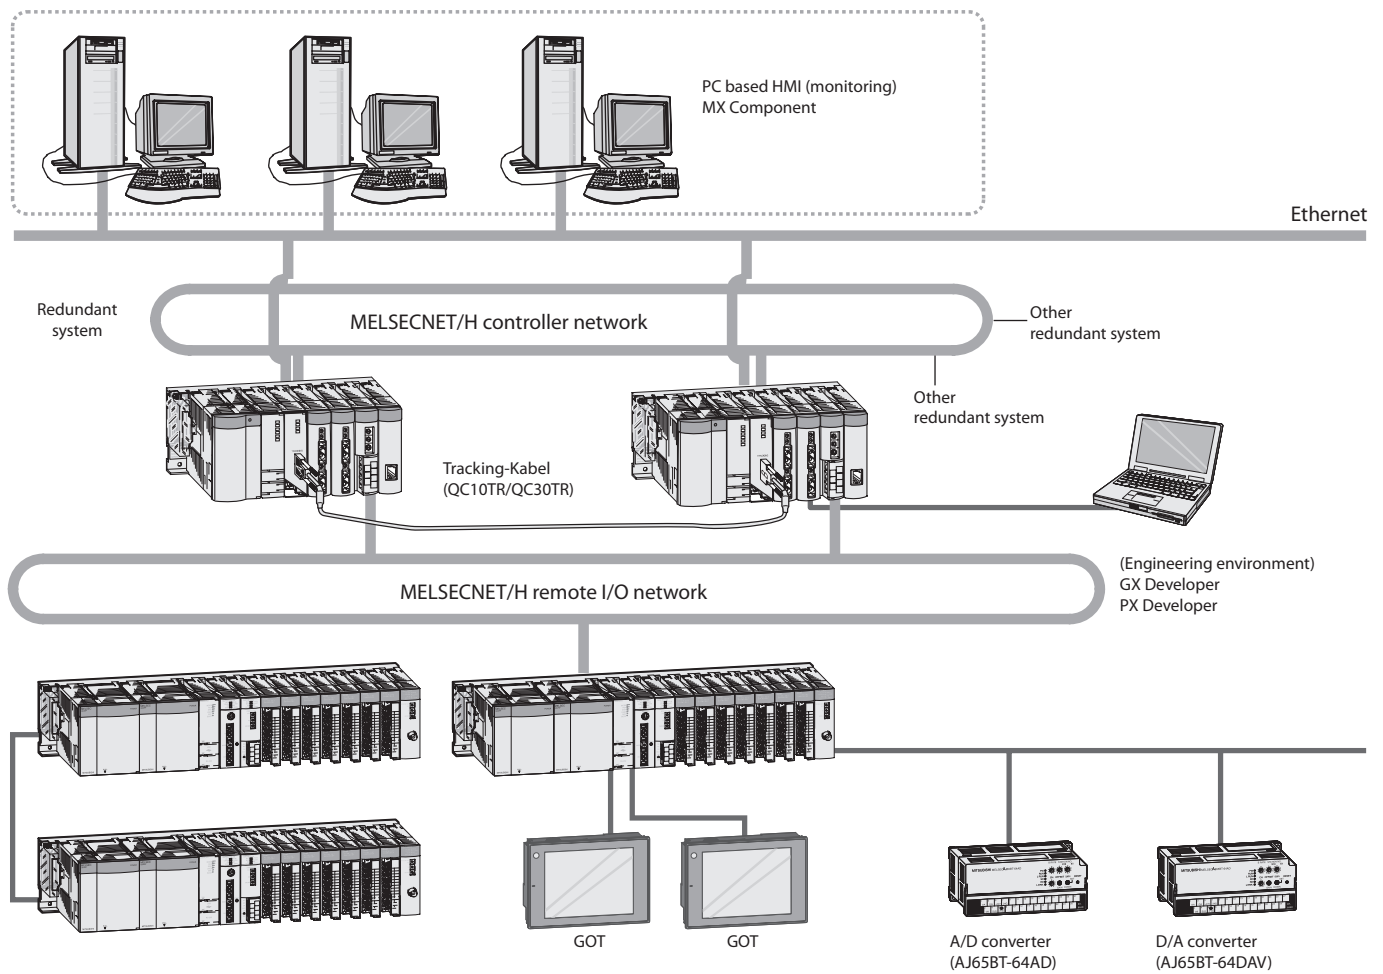


Easy program modification for both control and standby systems

- Write programs and parameter files to programmable controllers
- Online change while editing a program

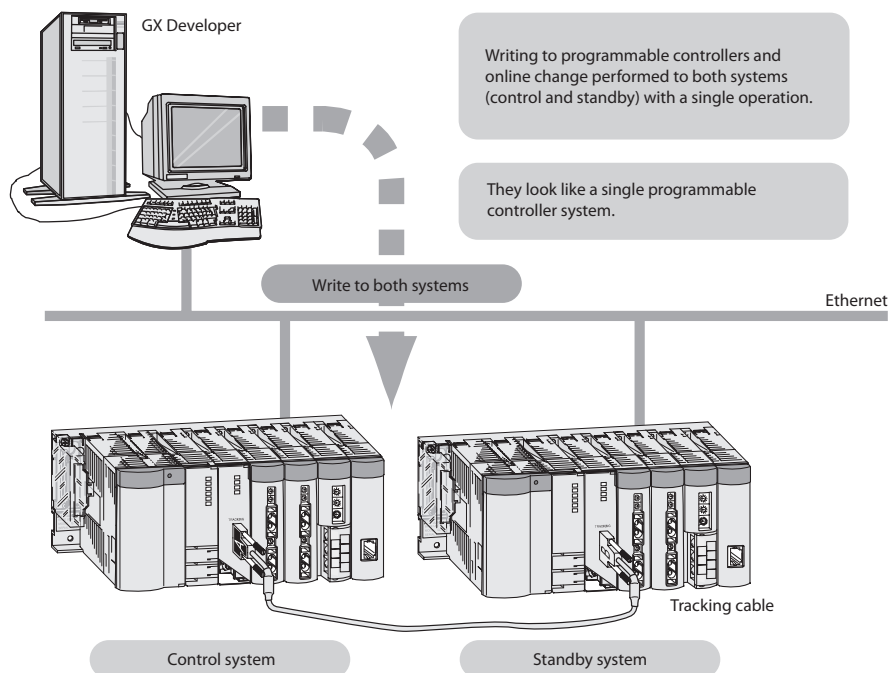

Continue operations even at system switching

If system switching occurs due to a stop error inside the CPU, the access target is automatically switched to the other system via the network. This enables continuous operation so that the user need not pay attention to system switching.

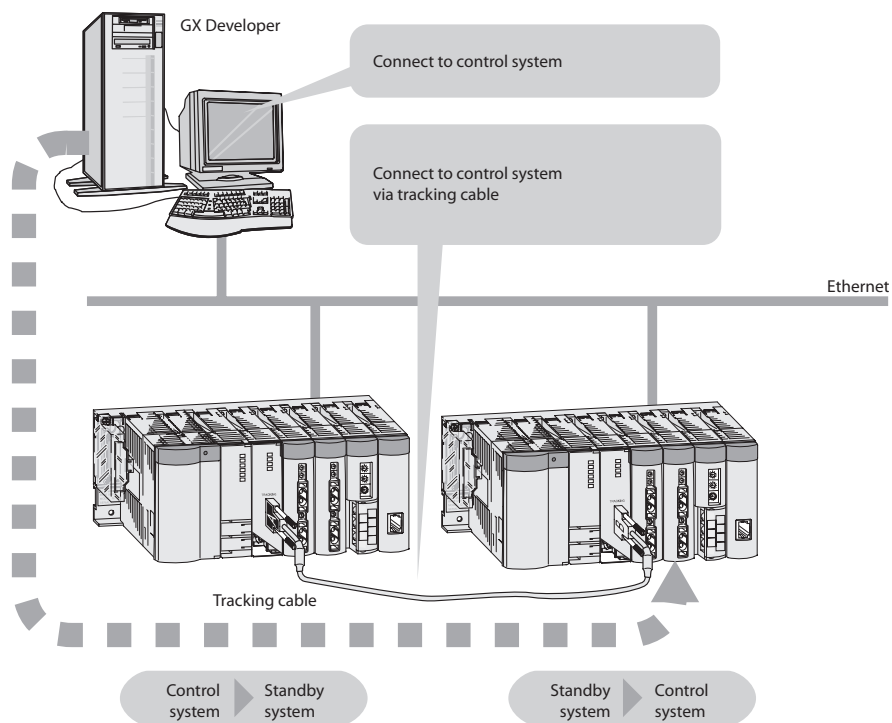

Configuration


System structure

The CPU and modules are held in a base unit which has an internal bus connection for communication between the individual modules and the CPUs. The power for the modules inserted in the base unit is delivered by the power supply module.

The base units are available in 4 different versions with 3 to 12 module slots. Each base unit can be supplemented by means of an extension unit providing additional slots.

If you wish to keep open the option of subsequent extension of your PLC or if you have free slots on your base unit, you can insert dummy modules here. They serve to protect the free slots from soiling or from mechanical effects but can also be used for reserving I/O points.

For cabling larger systems and machines - e.g. in a modular design - the use of remote I/O modules offers additional communications facilities.

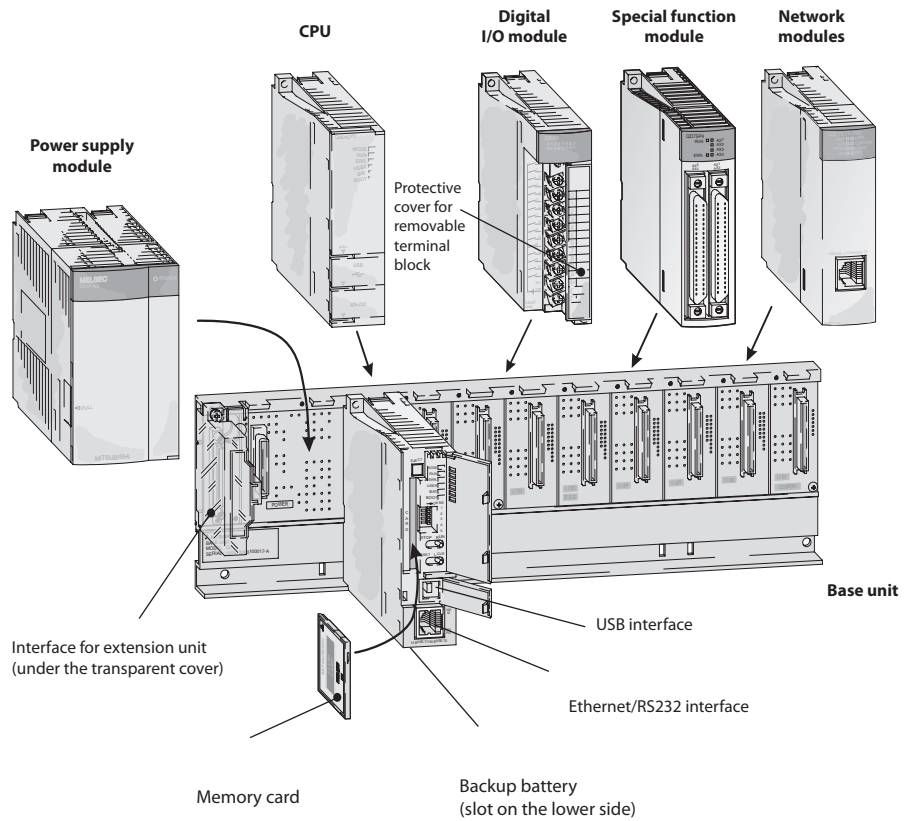


Extension

The base unit and extension units are simply connected to one another by extension cables.

When the Q52B and Q55B are used these cables also supply the necessary 5V DC power supply to the extension base unit. Up to seven extension units with up to 64 modules can be connected to base units or extension base units. The extension may be in the horizontal or vertical direction and allows a maximum distance of the extensions cables of 13.2 m.

When choosing the power supply module, the total power consumption of the I/O modules, of the special function modules and of the peripherals must be taken into account. If necessary, an extension unit with a further power supply module should be used.

It is also possible to use a redundant power supply configuration to increase availability.

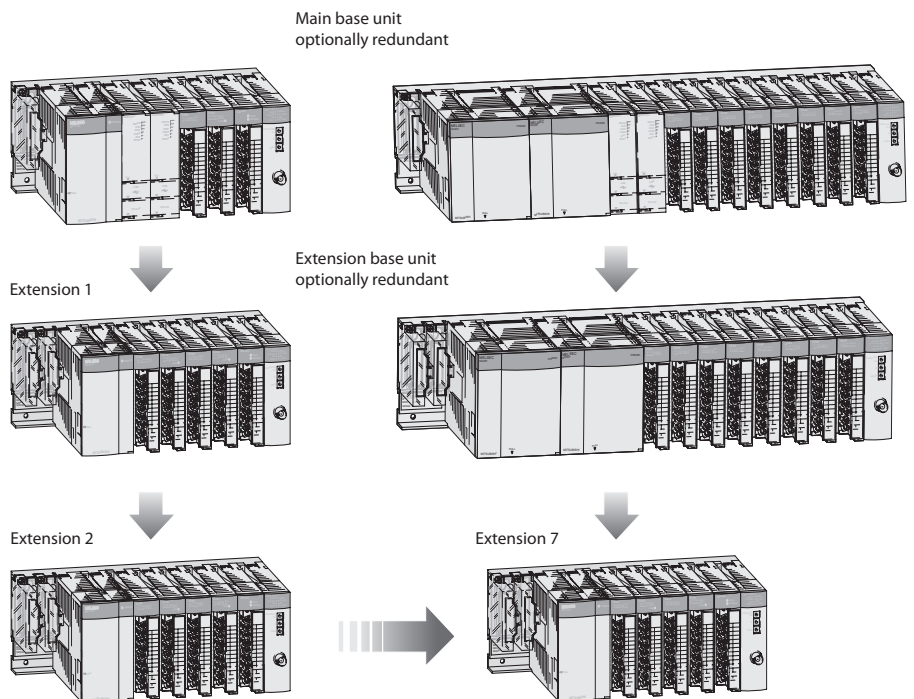

Module Combinations for Multiple CPU System

Multiple CPU high speed main base unit (Q3□DB)

CPU 1	CPU 2 to 4	Universal model QCPU		High performance model QCPU	Process CPU	Motion CPU		PC CPU
		Q00U Q01U Q02U	Q03UD (E)/Q04UD (E) H Q06UD (E) H/Q10UD (E) H Q13UD (E) H/Q20UD (E) H Q26UD (E) H	Q02 (H) Q06H Q12H Q25H	Q02PH Q06PH Q12PH Q25PH	Q172D Q173D Q172DS Q173DS	Q172H Q173H	
Universal model QCPU	Q00U	—	—	—	—	—	—	○ ①③
	Q01U ②	—	—	—	—	—	—	○ ①③
	Q02U	—	—	—	—	—	—	○ ①③
	Q03UD (E)	—	●	○	○	●	—	○ ①③
	Q04UD (E) H	—	●	○	○	●	—	○ ①③
	Q06UD (E) H	—	●	○	○	●	—	○ ①③
	Q10UD (E) H	—	●	○	○	●	—	○ ①③
	Q13UD (E) H	—	●	○	○	●	—	○ ①③
	Q20UD (E) H	—	●	○	○	●	—	○ ①③
	Q26UD (E) H	—	●	○	○	●	—	○ ①③
	Q50UDEH	—	●	○	○	●	—	○ ①③
Q100UDEH	—	●	○	○	●	—	○ ①③	
High Performance model QCPU	Q02 (H)	—	○	○	○	—	—	○ ①③
	Q06H	—	○	○	○	—	—	○ ①③
	Q12H	—	○	○	○	—	—	○ ①③
	Q25H	—	○	○	○	—	—	○ ①③

Main base unit other than (Q3□DB)

CPU 1	CPU 2 to 4	Universal model QCPU		High performance model QCPU	Process CPU	Motion CPU		PC CPU
		Q00U Q01U Q02U	Q03UD (E)/Q04UD (E) H Q06UD (E) H/Q10UD (E) H Q13UD (E) H/Q20UD (E) H Q26UD (E) H	Q02 (H) Q06H Q12H Q25H	Q02PH Q06PH Q12PH Q25PH	Q172D Q173D Q172DS Q173DS	Q172H Q173H	
Universal model QCPU	Q00U	—	—	—	—	—	—	○ ①③⑥
	Q01U ②	—	—	—	—	—	○ ④⑥	○ ①③⑥
	Q02U	—	—	—	—	—	○ ④⑥	○ ①③⑥
	Q03UD (E)	—	○	○	○ ⑦	—	—	○ ①③⑥
	Q04UD (E) H	—	○	○	○ ⑦	—	—	○ ①③⑥
	Q06UD (E) H	—	○	○	○ ⑦	—	—	○ ①③⑥
	Q10UD (E) H	—	○	○	○ ⑦	—	—	○ ①③⑥
	Q13UD (E) H	—	○	○	○ ⑦	—	—	○ ①③⑥
	Q20UD (E) H	—	○	○	○ ⑦	—	—	○ ①③⑥
	Q26UD (E) H	—	○	○	○ ⑦	—	—	○ ①③⑥
	Q50UDEH	—	○	○	○ ⑦	—	—	○ ①③⑥
Q100UDEH	—	○	○	○ ⑦	—	—	○ ①③⑥	
High Performance model QCPU	Q02 (H)	—	○	○	○ ⑦	—	○ ⑤⑥	○ ①③⑥
	Q06H	—	○	○	○ ⑦	—	○ ⑤⑥	○ ①③⑥
	Q12H	—	○	○	○ ⑦	—	○ ⑤⑥	○ ①③⑥
	Q25H	—	○	○	○ ⑦	—	○ ⑤⑥	○ ①③⑥

● = available ○ = optional — = not available

Notes:

- ① For usable model name, version, etc., please contact your local Mitsubishi Electric sales office or representative.
- ② Q00U, Q01U, or Q02U does not support multiple CPU high-speed communication.
- ③ Only one PC CPU can be used.
- ④ Only one motion CPU can be used.
- ⑤ Cannot be used together with Q03UD(E), Q04UD(E)H, Q06UD(E)H, Q10UD(E)H, Q13UD(E)H, Q20UD(E)H or Q26UD(E)H CPU.
- ⑥ The slim type main base unit (Q3□SB) and redundant power main base unit (Q38RB) cannot be used.
- ⑦ The slim type main base unit (Q3□SB) cannot be used.

General specifications

General Specifications	Data
Ambient operating temperature	0—+55 °C
Storage temperature	-25—+75 °C
Ambient relative humidity	Max. 95 % (non-condensing)
Protection	IP20
Noise durability	1500 Vpp with noise generator; 1 ms at 25–60 Hz
Insulation withstand voltage	AC 1500 V, 1 min.
Shock resistance	10 G (3 times each in 3 directions)/EN 61131-2
Vibration resistance	2 G: resistant to vibrations from 10–55 Hz for 2 hours along all 3 axes; 0.5 G for DIN rail mounting/EN 61131-2
Insulation resistance	>5 MΩ (500 V DC)
Ground	Class 3
Environment	Avoid environments containing corrosive gases, install in a dust-free location.
Certifications	UL/CSA/CE/DNV/NK/LR/ABS/GL/RINA/BV

MELSEC Networks

TCP/IP Ethernet

Ready for immediate operation with the worldwide standard TCP/IP protocol. A PC connected to the Ethernet has full access to all PLCs in the Network, all the way down to the I/Os on the production level.

MELSECNET/10/H

Low-cost cabling, brilliantly simple set-up and maximum availability thanks to redundancy and Floating Master. The maximum coverage is up to 30 km.

CC-Link/CC-Link Safety

The network for the control and I/O level comprises capabilities like real-time processing and distributed intelligence. Modules of third-party manufacturers can be integrated.

CC-Link IE

The new CC-Link IE open standard offers maximum performance at maximum availability. It serves firstly as a network for the control level and furthermore implements the manufacturing level, the motion level and the safety level. In future, the network structure will be uniform at all levels.

MELSEC FX Peer-to-Peer

The FX-PPN construction enables a network for up to 8 FX2N controllers as clients. A standard twisted-pair cable can be used as the communications media.

SSCNETIII/H

Mitsubishi Electric optical fibre based Servo System Controller Network (SSCNETIII) offers noise resistance communication for high-speed servo and motion applications.

Please refer to page 49 for an overview on the available network modules for the MELSEC System Q .

COMMAND LEVEL


TCP/IP Ethernet

CONTROL LEVEL

CC-Link/CC-Link IE
 CC-Link Safety
 MELSECNET/10
 MELSECNET/H

PRODUCTION LEVEL

CC-Link
 CC-Link IE Field
 CC-Link Safety
 MELSEC FX-PPN

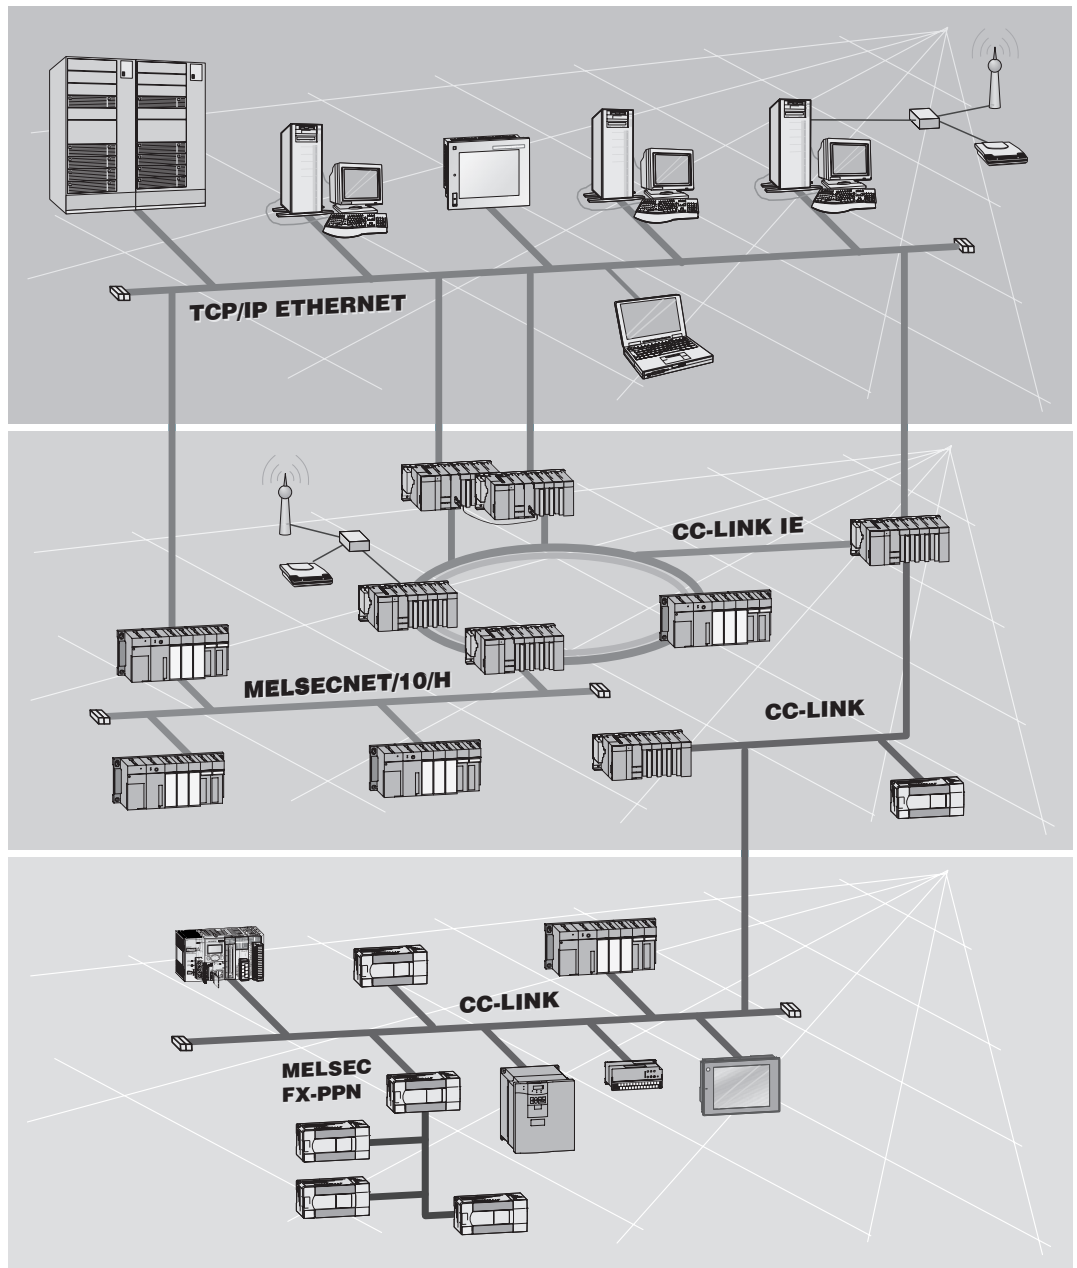

Open Networks

TCP/IP Ethernet

Ready for immediate operation with the worldwide standard TCP/IP protocol. A PC connected to the Ethernet has full access to all PLCs in the Network, all the way down to the I/Os on the production level.

Modbus/TCP

Non-proprietary protocol using Ethernet, the de facto standard for industrial automation applications

Modbus RTU

Serial protocol for networking master and slaves

CC-Link

The network for the control and I/O level comprises capabilities like real-time processing and distributed intelligence. Modules of third-party manufacturers can be integrated.

Profibus/DP

Enables quick and simple connection of sensors and actuators from different manufacturers to MELSEC PLCs, with data transfer rates of up to 12 Mbaud.

Profinet

Profinet is the open Industrial Ethernet standard for automation. It uses TCP/IP and IT standards, is capable of real time Ethernet and allows the integration of fieldbus systems.

DeviceNet


Cost-effective CAN-based network communications. Fault-resistant network structure where components of different manufacturers can be integrated quickly and easily.

AS-Interface

International standard for the lowest field bus level. Connection of conventional sensors and actuators with two-core cable.

CANopen

Inexpensive communications network with error-tolerant architecture. Allows fast and simple integration of components from different manufacturers. (FX only)

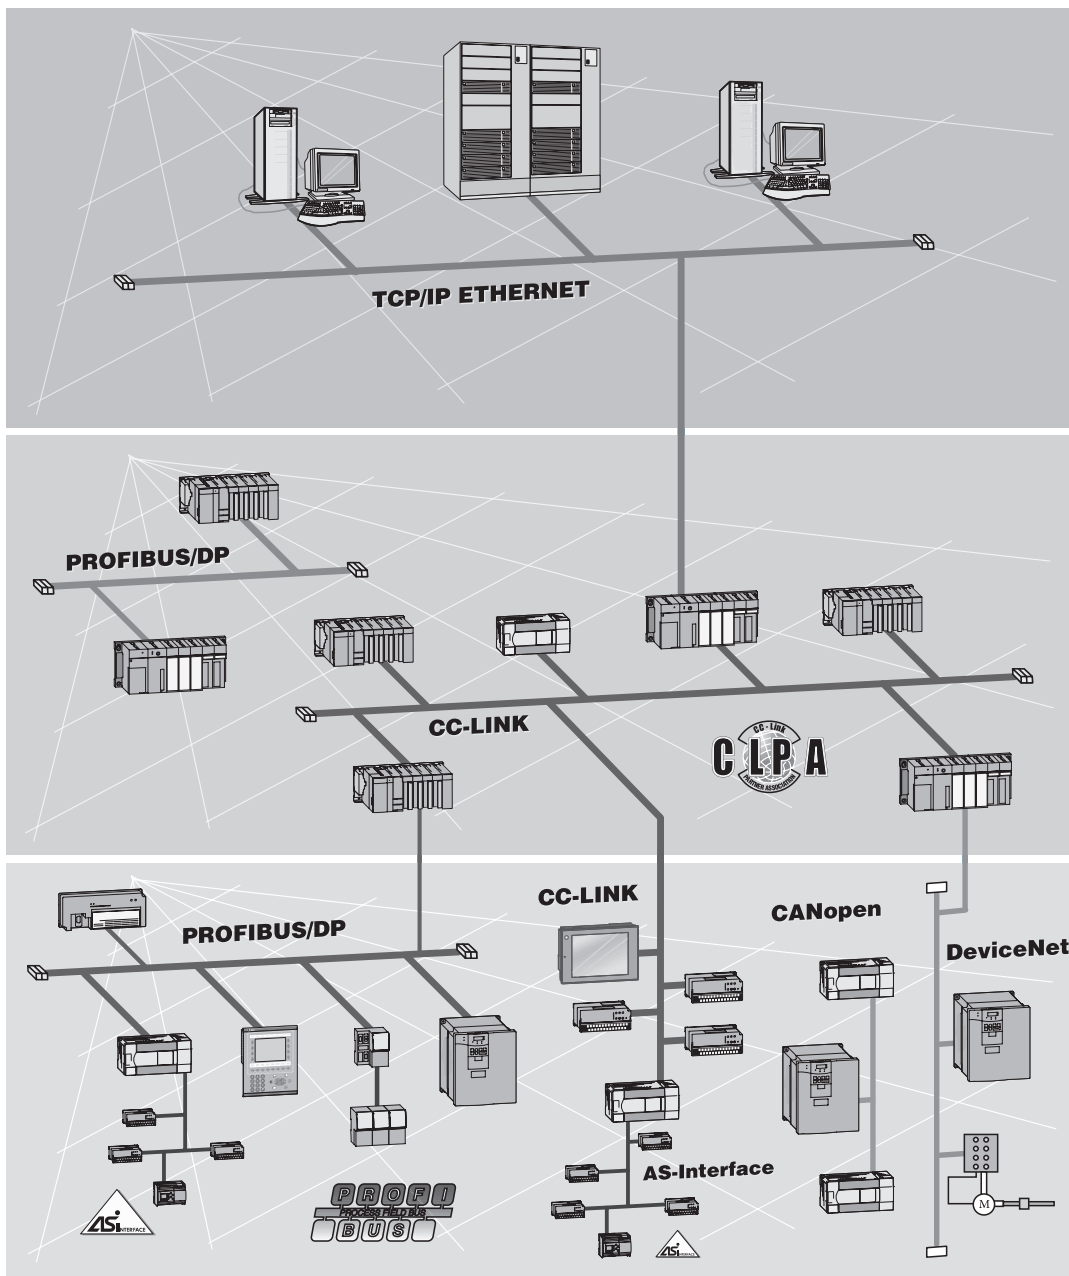

COMMAND LEVEL

TCP/IP Ethernet


CONTROL LEVEL

CC-Link/CC-Link IE
Profibus DP
Modbus/TCP

PRODUCTION LEVEL

Profibus DP
DeviceNet
AS-Interface
CC-Link
CANopen
Modbus RTU

Main Base Units

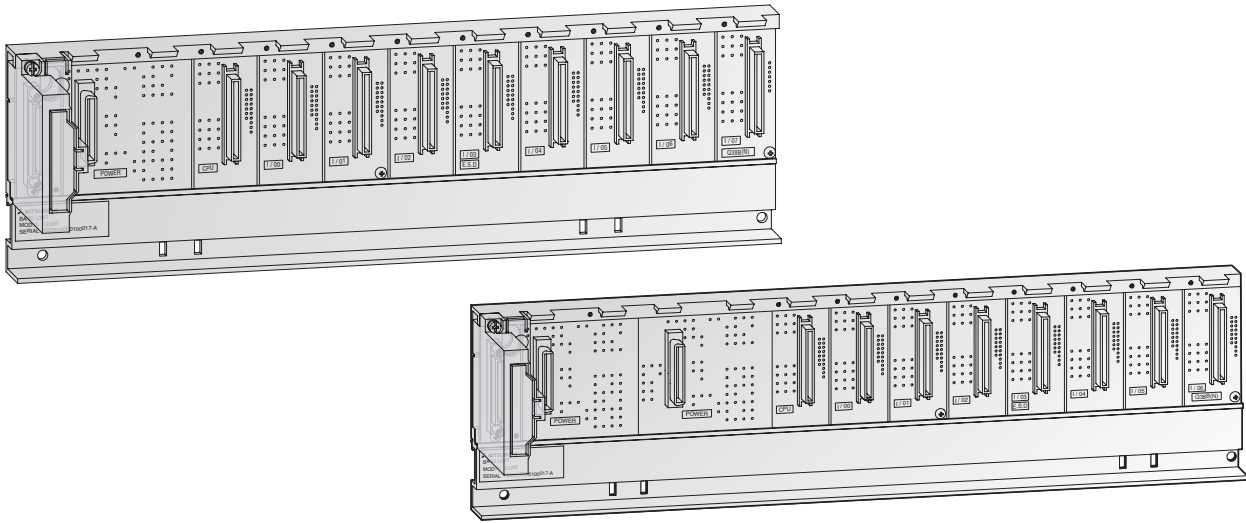

Main base unit

The main base unit is used for holding and coupling CPUs, power supply unit, input modules, output modules, special function modules and field bus connections.

Special features:

- Module addressing is automatic and it is assumed that the base units have 8 slots. Sixteen addresses are assigned to empty slots and non-existent slots (in base units with less than 8 slots). The automatic addressing can be changed with the I/O Assignment function.
- Base units with slots for two redundant power supplies increase the availability of the system.
- The units are mounted by means of screws or on a profiled rail with an integrated adapter.

Specifications	Q325B	Q33B	Q335B	Q35B	Q355B	Q35DB	Q38B	Q38DB*	Q38RB*	Q312B*	Q312DB*	
Slots for I/O modules	2	3	3	5	5	5	8	8	8	12	12	
Slots for power supply modules	1	1	1	1	1	1	1	1	2	1	1	
Installation	All base units provide installation holes for M4 screws.											
Dimensions (WxHxD)	mm	114x98x18.5	189x98x44.1	142x98x18.5	245x98x44.1	197.5x98x18.5	245x98x44.1	328x98x44.1	328x98x44.1	439x98x44.1	439x98x44.1	439x98x44.1
Order information	Art. no.	147273	136369	147284	127586	147285	249091	127624	207608	157573	129566	207609
Accessories	Connection cables (refer to page 56); adapter for DIN rail mounting (refer to page 60)											

* These base units are required for the new iQ Platform motion, NC and robot CPUs.

Safety main base unit


The safety main base unit holds and connects the Safety CPU and up to two CC-Link Safety Master Modules and Ethernet modules.

Special features:

- Automatic module addressing
- The base unit is mounted by means of screws or on a profiled rail with an integrated adapter.

Specifications	Q325B	
Slots for I/O modules	4	
Slots for power supply modules	1	
Internal power consumption (5 V DC)	0.095 A	
Installation	Provides installation holes for M4 screws.	
Dimensions (WxHxD)	mm	245x98x44.1
Order information	Art. no.	203206
Accessories	Connection cables (refer to page 56); adapter for DIN rail mounting (refer to page 60)	

Extension Base Units

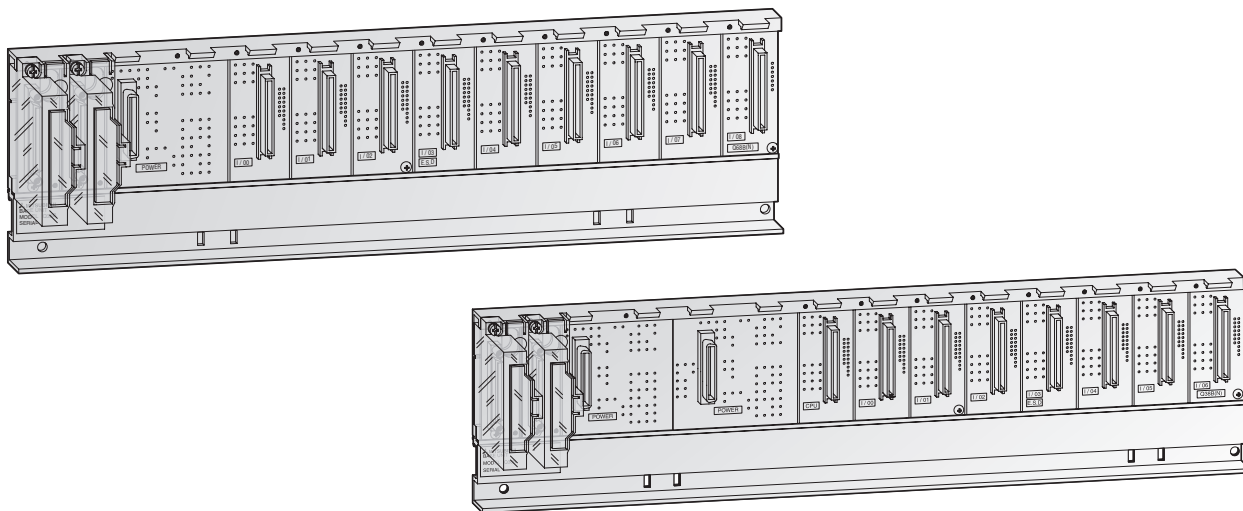

Extension base units

The extension base units are connected to the main base unit by means of assembled bus cables. Thus, a MELSEC System Q can be expanded to max. 7 extension units with up to 64 I/O modules.

The extension units provide a slot for their own power supply module.

With the redundant type extension base unit Q65WRB, I/O modules can be directly connected to a redundant system.

The extension base unit QA1S51B is used to connect a module of the AnS series to the MELSEC System Q..

Special features:


- Q6*B extension units provide a slot for their own power supply module
- A total of max.7 extension units can be connected to a main base unit with up to 64 I/O modules for a single system
- The maximum distance from the first to the last base unit is 13.2 m.
- Base units with slots for two redundant power supplies increase the availability of the system.

An extension base unit with a power supply module must be used in the following cases:

- If the power consumption of the inserted modules exceeds the capacity of the power supply module on the base unit.
- If the voltage drops below 4.75 V between the base unit and the extension unit.

Specifications	Q52B	Q55B	Q63B	Q65B	Q68B	Q68RB	Q612B	Q65WRB	QA1S51B	
Slots for power supply modules	—	—	1	1	1	2	1	1	—	
Slots for I/O modules	2	5	3	5	8	8	12	5	1	
Installation	All base units provide installation holes for M4 screws.									
Weight	kg	0.14	0.23	0.23	0.25	0.35	0.45	0.45	0.52	0.23
Dimensions (WxHxD)	mm	106x98x44.1	189x98x44.1	189x98x44.1	245x98x44.1	328x98x44.1	439x98x44.1	439x98x44.1	439x98x44.1	100x130x50.7
Order information	Art. no.	140376	140377	136370	129572	129578	157066	129579	210163	249092
Accessories	Connection cables (refer to page 56); adapter for DIN rail mounting (refer to page 60)									

■ Power Supply Modules

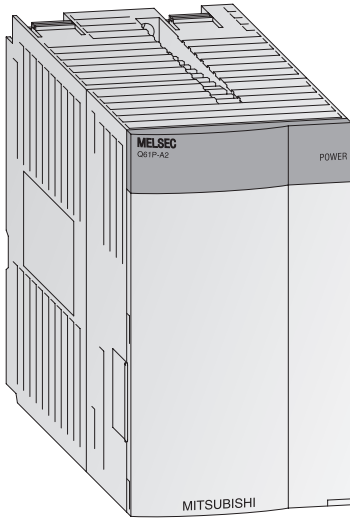

Power supply modules


The power supply modules supply the voltages required for operation to the individual modules. The choice is dependent on the power consumption of the individual modules (this is especially important when using multiple CPUs.)

Special features:

- The readiness for operation is indicated by a LED.
- By use of the power supply Q63P it is possible that controllers can be supplied by means of additional 24 V DC output.
- The power supply modules Q62P can be used world-wide because they support the wide input range from 100 to 240 V AC at 50/60 Hz.
- The Q63RP and Q64RP power supplies can be used with all CPUs (except the Q00JCPU) to increase the system availability level. All redundant power supplies can be replaced while the system is in RUN mode without interrupting control operation.
- Two redundant power supplies in a redundant base unit are required for a redundant power supply configuration.

Specifications		Q61P	Q61P-D	Q61SP	Q62P	Q63P	Q63RP	Q64PN	Q64RP	QS061P-A1	QS061P-A2
Input voltage	(+10 %, -15 %) V AC	85–264	100–240	85–264	100–240	—	—	100–240	100–240	100–120	200–240
	(+30 %, -35 %) V DC	—	—	—	—	24	24	—	—	—	—
Input frequency	Hz	50/60 (±5 %)	50/60 (±5 %)	50/60 (±5 %)	50/60 (±5 %)	—	—	50/60 (±5 %)	50/60 (±5 %)	50/60 (±5 %)	50/60 (±5 %)
Inrush current		20 A within 8 ms	20 A within 8 ms	20 A within 8 ms	20 A within 8 ms	81 A within 1 ms	150 A within 1 ms	20 A within 1 ms	20 A within 1 ms	20 A within 8 ms	20 A within 8 ms
Max. input apparent power		120 VA	130 VA	40 VA	105 VA	45 W	65 W	160 VA	160 VA	125 VA	125 VA
Rated output current	5 V DC	A	6	6	2	3	6	8.5	8.5	6	6
	24 V DC ±10 %	A	—	—	—	0.6	—	—	—	—	—
Overcurrent protection	5 V DC	A	≥6.6	≥6.6	≥2.2	≥3.3	≥5.5	≥5.5	≥9.9	≥14.4	≥6.6
	24 V DC	A	—	—	—	≥0.66	—	—	—	—	—
Overvoltage protection	5 V DC	V	5.5–6.5	5.5–6.5	5.5–6.5	5.5–6.5	5.5–6.5	5.5–6.5	5.5–6.5	5.5–6.5	5.5–6.5
Efficiency			≥70 %	≥70 %	≥65 %	≥70 %	≥70 %	≥65 %	≥70 %	≥65 %	≥70 %
Insulation withstand voltage	Between primary and 5 V DC		2830 V AC, 1 min.	2830 V AC, 1 min.	2830 V AC, 1 min.	2830 V AC, 1 min.	500 V AC, 1 min.	500 V AC, 1 min.	2830 V AC, 1 min.	2830 V AC, 1 min.	2830 V AC, 1 min.
	Between primary and 24 V DC		—	—	—	2830 V AC, 1 min.	—	—	—	—	—
Max. compensation time at power failure	ms	20	20	20	20	10	10	20	20	20	20
Power indicator		All modules possess a power LED display.									
Terminal screw size		All modules possess terminal screw size M 3.5 x 7 mm.									
Applicable wire size	mm ²	0.75–2 (AWG 18–14)	0.75–2 (AWG 18–14)	0.75–2 (AWG 18–14)	0.3–2 (AWG 18–14)	0.3–2 (AWG 16–22)	0.75–2 (AWG 16–22)	0.75–2 (AWG 11–22)	0.75–2 (AWG 11–22)	0.75–2	0.75–2
Weight	kg	0.30	0.30	0.39	0.50	0.47	0.40	0.47	0.47	0.40	0.40
Dimensions (WxHxD)	mm	55.2x98x90	55.2x98x90	27.4x98x104	55.2x98x90	55.2x98x90	83x98x115	55.2x98x115	55.2x98x115	55.2x98x115	55.2x98x115
Order information	Art. no.	190235	221860	147286	140379	136371	166091	217627	157065	203207	203208

■ PLC CPU Modules

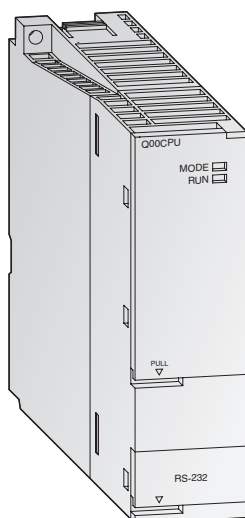

The basic PLC CPUs

The CPU modules of the MELSEC System Q are available as single and multi processor CPUs through which they achieve a wide application range. The performance of the controller here grows with the application by simply replacing the CPU (except Q00J).

While Q00CPU and Q01CPU are classical separate CPUs, the Q00JCPU forms an inseparable unit consisting of CPU, power supply and base unit and thus enables a low-priced entry into the modular PLC technology.

The standard CPUs were developed especially for applications where a compact system configuration easily to be realized is to the fore.


Special features:

- Every CPU is equipped with an RS232C interface for easy programming and monitoring from a personal computer or operating panel.
- Integrated Flash ROMs for memory operation without additional memory cards
- Processing the inputs and outputs with refresh mode

Specifications	Q00JCPU	Q00CPU	Q01CPU
Type	Combination of CPU module (single processor), 5 slot base unit and power supply	CPU module (multi processor)	CPU module (multi processor)
I/O points	256/2048	1024/2048	1024/2048
CPU self-diagnostic functions	CPU error detection, Watch Dog, battery error detection, memory error detection, program check, power supply error detection, fuse error detection		
Multi processor operation	Not possible	With PPC-CPU, Q172CPUN, Q173CPUN only	With PPC-CPU, Q172CPUN, Q173CPUN only
Battery buffer	All CPU modules are fitted with a lithium-battery with a life expectancy of 5 years.		
Memory type	ROM	RAM, ROM	RAM, ROM
Memory capacity	Overall Max. for PLC program		
	58 kByte 8 k steps (32 kByte)	94 kByte 8 k steps (32 kByte)	94 kByte 14 k steps (56 kByte)
Program cycle period	0.20 μs/log. instruction	0.16 ms/log. instruction	0.10 ms/log. instruction
Timer (T)	512	512	512
Counter (C)	512	512	512
Internal/special relay (M)	8192	8192	8192
Data register/special register (D)	11136	11136	11136
File register (R) a	—	32768	32768
Interrupt pointer (I)	128	128	128
Pointer (P)	300	300	300
Annunciator (F)	1024	1024	1024
Index register (Z)	10	10	10
Link relay (B)/link register (W)	2048/2048	2048/2048	2048/2048
Number of connectable extensions	2	4	4
Max. number of insertable modules	16	24	24
Internal power consumption (5 V DC)	mA 220	250	270
Weight	kg 0.66 ②	0.13	0.13
Dimensions (WxHxD)	mm 245x98x98 ②	27,4x98x89,3	27,4x98x89,3
Order information	Art. no. 138322	138323	138324
The CPU can be replaced by:	Q00JCPU	Q00UCPU	Q01UCPU

① The number for the Q00CPU and Q01CPU depends on the memory configuration.
 ② The data refer to the entire unit, including base unit and power supply.

PLC CPU Modules

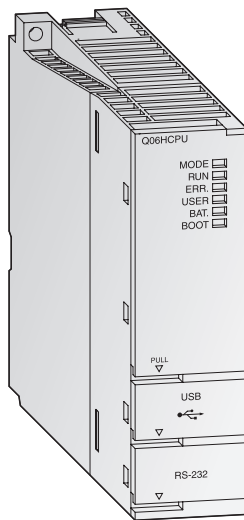

High-performance PLC CPUs

With the high-performance CPUs a high processing speed and expandability are to the fore. They provide a great variety of functions and an even optimized programming and debugging environment to ensure a flexible response to all systems.


Special features:

- Every multi processor H-CPU is equipped with an USB interface for easy programming and monitoring from a personal computer.
- Processing the inputs and outputs with refresh mode
- Floating point arithmetic according to IEEE 754
- Special statements for processing PID control loops
- Mathematical functions, such as angle/exponential functions and logarithm
- Hot-swap module replacement in RUN mode (with process CPUs)
- Multi processor mode is possible with up to 4 CPU modules.

Specifications	Q02CPU	Q02HCPU	Q06HCPU	Q12HCPU	Q25HCPU
Type	Multi processor CPU module				
I/O points	4096/8192	4096/8192	4096/8192	4096/8192	4096/8192
CPU self-diagnostic functions	CPU error detection, Watch Dog, battery error detection, memory error detection, program check, power supply error detection, fuse error detection				
Multiprocessor mode	Up to 4 CPU modules can be used in combination on one base unit.				
Battery buffer	All CPU modules are fitted with a lithium-battery with a life expectancy of 5 years.				
Memory type	RAM, ROM, FLASH				
Memory capacity	Overall	≤32 MByte	≤32 MByte	≤32 MByte	≤32 MByte
	Max. for PLC program	28 k steps (112 kByte)	28 k steps (112 kByte)	60 k steps (240 kByte)	12 k steps (496 kByte)
Program cycle period	79 ns/ log. instruction	34 ns/ log. instruction	34 ns/ log. instruction	34 ns/ log. instruction	34 ns/ log. instruction
Timer (T)	2048	2048	2048	2048	2048
Counter (C)	1024	1024	1024	1024	1024
Internal/special relay (M)	8192	8192	8192	8192	8192
Data register/special register (D)	12288	12288	12288	12288	12288
File register (R) ①	32768/ max. 1042432	65536/ max. 1042432	65536/ max. 1042432	131072/ max. 1042432	131072/ max. 1042432
Interrupt pointer (I)	256	256	256	256	256
Pointer (P)	4096	4096	4096	4096	4096
Annunciator (F)	2048	2048	2048	2048	2048
Index register (Z)	16	16	16	16	16
Link relay (B)/link register (W)	8192/8192	8192/8192	8192/8192	8192/8192	8192/8192
Number of connectable extensions	7	7	7	7	7
Max. number of insertable modules	64	64	64	64	64
Internal power consumption (5 V DC)	mA 600	640	640	640	640
Weight	kg 0.20	0.20	0.20	0.20	0.20
Dimensions (WxHxD)	mm 27.4x98x89.3	27.4x98x89.3	27.4x98x89.3	27.4x98x89.3	27.4x98x89.3
Order information	Art. no. 132561	127585	130216	130217	130218
The CPU can be replaced by:	Q03UD/UDECPU	Q03UD/UDECPU	Q06UDH/UDEHCPU	Q13UDH/UDEHCPU	Q26UDH/UDEHCPU

① Number depends on memory configuration

■ Universal PLC CPUs

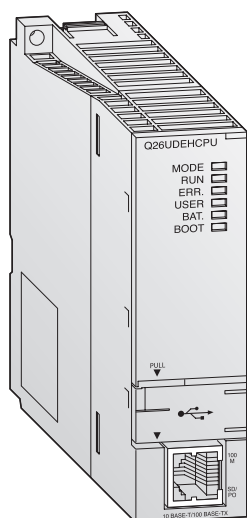

These universal PLC CPUs are the latest generation of modular CPUs for the MELSEC System Q controller platform and they are the foundation of the iQ Platform system. They can be combined with the motion, robot and NC CPUs to configure scalable and highly flexible modular automation systems.


Special features:

- Integrated mini USB interface for programming
- Integrated Ethernet interface for efficient communication with the nUDEH modules
- Extremely fast bit processing, 9.5 ns
- High-speed data access

Specifications	Q00UJCPU	Q00UCPU	Q01UCPU	Q02UCPU	Q03UDCPU, Q03UDECPU	Q04UDHCPU, Q04UDEHCPU
Type	Multi processor CPU module					
I/O points	256/8192	1024/8192	1024/8192	2048/8192	4096/8192	4096/8192
CPU self-diagnostic functions	CPU error detection, Watch Dog, battery error detection, memory error detection, program check, power supply error detection, fuse error detection					
Battery buffer	All CPU modules are fitted with a lithium-battery with a life expectancy of 5 years.					
Memory type	RAM, ROM, FLASH	RAM, ROM, FLASH	RAM, ROM, FLASH	RAM, ROM, FLASH	RAM, ROM, FLASH	RAM, ROM, FLASH
Memory capacity	Overall	≤32 MByte	≤32 MByte	≤32 MByte	≤32 MByte	≤32 MByte
	Max. for PLC program	10 k steps (40 kByte)	10 k steps (40 kByte)	15 k steps (60 kByte)	20 k steps (80 kByte)	30 k steps (120 kByte)
Program cycle period	120 ns/log. instruction	80 ns/log. instruction	60 ns/log. instruction	40 ns/log. instruction	20 ns/log. instruction	9.5 ns/log. instruction
Dimensions (WxHxD)	mm 245x98x98	27.4x98x89.3	27.4x98x89.3	27.4x98x89.3	27.4x98x89.3	27.4x98x89.3
Order information	Art. no. 221575	221576	221577	207604	207605, 217899	207606, 217900

Specifications	Q06UDHCPU, Q06UDEHCPU	Q10UDHCPU, Q10UDEHCPU	Q13UDHCPU, Q13UDEHCPU	Q20UDHCPU, Q20UDEHCPU	Q26UDHCPU, Q26UDEHCPU	Q50UDEHCPU	Q100UDEHCPU
Type	Multi processor CPU module						
I/O points	4096/8192	4096/8192	4096/8192	4096/8192	4096/8192	4096/8192	4096/8192
CPU self-diagnostic functions	CPU error detection, Watch Dog, battery error detection, memory error detection, program check, power supply error detection, fuse error detection						
Battery buffer	All CPU modules are fitted with a lithium-battery with a life expectancy of 5 years.						
Memory type	RAM, ROM, FLASH	RAM, ROM, FLASH	RAM, ROM, FLASH	RAM, ROM, FLASH	RAM, ROM, FLASH	RAM, ROM, FLASH	RAM, ROM, FLASH
Memory capacity	Overall	≤32 MByte	≤32 MByte	≤32 MByte	≤32 MByte	≤32 MByte	≤32 MByte
	Max. for PLC program	60 k steps (240 kByte)	100 k steps (400 kByte)	130 k steps (520 kByte)	200 k steps (800 kByte)	260 k steps (1040 kByte)	500 k steps (2000 kByte)
Program cycle period	9.5 ns/log. instruction	9.5 ns/log. instruction	9.5 ns/log. instruction	9.5 ns/log. instruction	9.5 ns/log. instruction	9.5 ns/log. instruction	9.5 ns/log. instruction
Dimensions (WxHxD)	mm 27.4x98x89.3	27.4x98x89.3	27.4x98x89.3	27.4x98x89.3	27.4x98x89.3	27.4x98x115	27.4x98x115
Order information	Art. no. 207607, 215808	221578, 221579	217619, 217901	221580, 221581	217620, 217902	242368	242368

Process CPU Modules

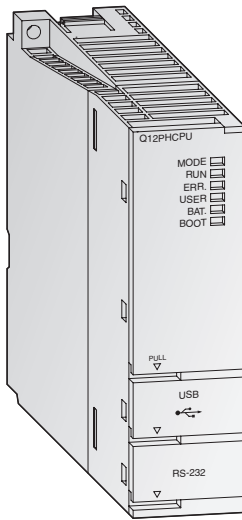

The MELSEC System Q process CPU allows flexible system design based on off-the-shelf components, which reduces both initial and implementation costs. Using either PX Developer/GX Developer or GX IEC Developer, process applications can be designed, debugged, monitored and maintained. The MELSEC Process Control system is best suited for food manufacturing and chemical plant applications, where liquid or solid materials are stored in a tank and a level must be maintained within a specific range. The Process CPU combines DCS functions with PLC operability into one compact module.


Special features:

- Simplified control and engineering
- Extensive Loop control
- High-speed Loop control
- Improved reliability and serviceability
- Hot-swap module replacement in run mode
- Works with CC-Link IE, MELSECNET/H for multiplex remote I/O system
- Loop Control and sequence control with one CPU
- Utilisation and expandability
- Use with isolated analog modules, ideal for process control
- Smoothed analog input value

Specifications	Q02PHCPU	Q06PHCPU	Q12PHCPU	Q25PHCPU
Type	Process CPU module			
I/O points	4096/8192	4096/8192	4096/8192	4096/8192
CPU self-diagnostic functions	CPU error detection, Watch Dog, battery error detection, memory error detection, program check, power supply error detection, fuse error detection			
Multiprocessor mode	Up to 4 CPU modules can be used in combination on one base unit.			
Battery buffer	All CPU modules are fitted with a lithium-battery with a life expectancy of 5 years.			
Memory type	RAM, ROM, FLASH	RAM, ROM, FLASH	RAM, ROM, FLASH	RAM, ROM, FLASH
Memory capacity	Overall	≤32 MByte	≤32 MByte	≤32 MByte
	Max. for PLC program	28 k steps (112 kByte)	60 k steps (240 kByte)	124 k steps (496 kByte)
Program cycle period	34 ns/log. instruction	34 ns/log. instruction	34 ns/log. instruction	34 ns/log. instruction
Timer (T)	2048	2048	2048	2048
Counter (C)	1024	1024	1024	1024
Internal/special relay (M)	8192	8192	8192	8192
Data register/special register (D)	12288	12288	12288	12288
File register (R) ^①	65536/ max. 1042432	65536/ max. 1042432	131072/ max. 1042432	131072/ max. 1042432
Interrupt pointer (I)	256	256	256	256
Pointer (P)	4096	4096	4096	4096
Annunciator (F)	2048	2048	2048	2048
Index register (Z)	16	16	16	16
Link relay (B)/link register (W)	8192/8192	8192/8192	8192/8192	8192/8192
Number of connectable extensions	7	7	7	7
Max. number of insertable modules	64	64	64	64
Internal power consumption (5 V DC)	mA 640	640	640	640
Max. compensation time at power failure	ms Varies according to the type of power unit			
Weight	kg 0.20	0.20	0.20	0.20
Dimensions (WxHxD)	mm 27.4x98x89.3	27.4x98x89.3	27.4x98x89.3	27.4x98x89.3
Order information	Art. no. 218138	218139	143529	143530
Accessories	Software PX-Developer optional			

① Number depends on memory configuration

■ Redundant PLC CPU Modules

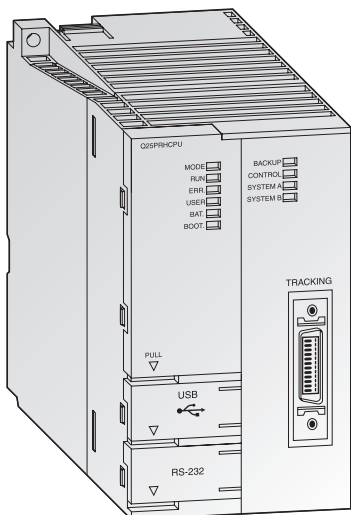

Redundant PLC CPU Modules

In a redundant setup two identically-configured systems are automatically kept synchronised to provide “hot standby” functionality, thus guaranteeing maximum availability and failsafe performance. This significantly reduces down time and restart overheads and costs. The higher purchase price of redundant systems are negligible when compared to the costs they can save in the event of a failure.

If the active system fails the hot standby system cuts in automatically and takes over, without any interruption.

The system’s modular architecture makes it possible to implement different levels of redundancy, as required: Power supply redundancy, master redundancy and controller redundancy.


Special features:

- QnPRH is based on standard components, so existing peripherals can be used.
- Complete integration in existing and non-redundant environments possible.
- Very short switching times possible – user-configurable, min. switching time 22 ms (48 k words).
- Programmable just like a normal system, using standard software.
- Automatic detection of the active system with MX Components/ MX OPC Server communicating with higher-level systems
- The I/O-level can be connected via MELSECNET/H network (redundant ring), CC-Link, CC-Link IE, Ethernet or Profibus.
- The availability of these networks can be increased by using redundant master modules.

Specifications	Q12PRHCPU	Q25PRHCPU
Type	Process CPU module, high availability	
I/O points	4096/8192	4096/8192
CPU self-diagnostic functions	CPU test, watchdog (time monitoring), battery check, memory test, program plausibility, mains power monitoring, redundancy synchronisation	
Multiprocessor mode	—	
Battery buffer	All CPUs are fitted with a lithium battery with a service life of 5 years.	
Memory type	RAM, ROM, FLASH	RAM, ROM, FLASH
Memory capacity	Overall	≤32 MByte
	Max. for PLC program	124 k steps (496 kByte)
Program cycle period	34 ns/log. instruction	34 ns/log. instruction
Timer (T)	2048	2048
Counter (C)	1024	1024
Internal/special relay (M)	8192	8192
Data register/special register (D)	12288	12288
File register (R)	131072/max. 1042432	131072/max. 1042432
Interrupt pointer (I)	256	256
Pointer (P)	4096	4096
Annunciator (F)	2048	2048
Index register (Z)	16	16
Link relay (B)/link register (W)	8192/8192	8192/8192
Max. number of insertable modules	Max 11 in main base unit, 64 all via MELSECNET remote connection, no central extension unit can be connected	
Internal power consumption (5 V DC)	mA 640	640
Weight	kg 0.30	0.30
Dimensions (WxHxD)	mm 52.2x98x89.3	52.2x98x89.3
Order information	Art. no. 157070	157071
Accessories	Software PX-Developer (optional)	

* Tracking cables QC10TR and QC30TR, refer to page 56

■ PC CPU Module

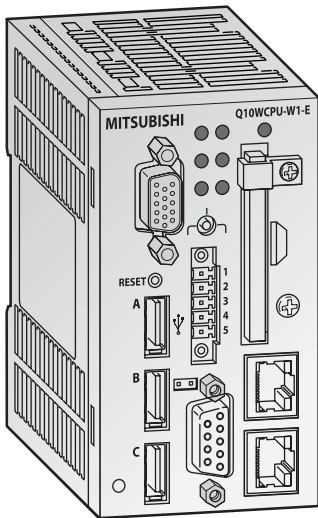

The Windows®-CPU


The Q10WCPU uses the Microsoft Windows® operating system and can be combined with the power supplies, racks, I/O and special modules from the MELSEC System Q. The CPU module can be used in stand-alone mode or in multi-CPU mode, in conjunction with PLC CPU modules for example. This enables a seamless connection between the process and the data processing system. While the PLC CPU modules control and regulate processes, the Q10WCPU undertakes the conditioning and processing of data. The Q10WCPU-W1-E boots up from the integral solid-state drive (SSD) or from an installed Type 1 CF memory card (Q10WCPU-W1-CFE). The two integral LAN interfaces allow the unit to be incorporated in networks and enable access to Intranet and Internet. The hardware has been implemented by means of an embedded CPU and a proven chipset. The use of easily available components ensures that this CPU module can be applied with ease. In addition, the self-adapting BIOS enables support right at the BIOS level.

Special features:

- Windows® operating system in a module with small dimensions (double the width of a MELSEC System Q PLC CPU module).
- Energy-saving by using an Intel Atom N450 processor. Various options for saving energy are adjustable. This ensures adequate performance and low energy consumption.
- Equipped with a variety of interfaces as standard (1000BASE-T (LAN), USB 2.0, CF-Card etc.).
- The customizable Phoenix Award BIOS enables support right at the BIOS level.
- A CF memory card can be installed as an external storage medium (Q10WCPU-W1-CFE)
- The integrated Solid State Drive (SSD) has a double write protection function and thus provides a reliable protection for important data.

Specifications		Q10WCPU-W1-E	Q10WCPU-W1-CFE
Type		Personal Computer CPU	
CPU		Intel® Atom™ Processor N450 1.66 GHz	
Chip set		Intel® ICH8M	
Processing frequency	GHz	1.66	
Memory	L1 cache	Instruction 32 kB + data 24 kB	
	L2 cache	512 kB	
	Main	1 GB	
Video		Analog-RGB, resolution 1400 x 1050 at 60 Hz (16 million colors)	
Interfaces	Serial (RS232C)	One 9-pin D-SUB connector, transfer rate: 50–115200 bps	
	USB	Five USB2.0 compliant ports (3 at the front and 2 at the rear)	
	Keyboard/mouse	Connection via one of the USB ports	
	LAN	Two RJ45 sockets for 1000BASE-T/100BASE-TX/10BASE-T	
	Monitor	1x15-pin H-DSUB	
PC card slots		1 slot for CF memory card (type I)	
Internal power consumption (5 V DC)	A	Max. 3	
Weight	kg	0.44	0.45
Dimensions (WxHxD)	mm	55.2x98.0x115	
Order information	Art. no.	252826	252827

C Controller CPU

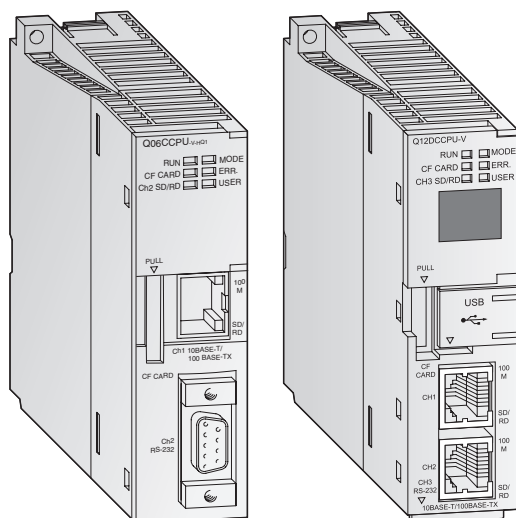

High-level language programming in combination with real time operating system


The C Controller allow the integration and programming of the automation platform MELSEC System Q with C++. Using the world-wide established real time operating system VxWorks, realisation of complex tasks, communication and protocols becomes easy.

Special features:

- Integration in the multi CPU layout of MELSEC System Q through combination with PLC and Motion CPUs or use as stand-alone system.
- Real time operating system VxWorks
- Dedicated development environment of C-/C++ language
- CompactFlash card makes handling of large quantities of data easy
- High performance addition to the existing range of automation products
- 7-segment LED display for efficient debugging and trouble-shooting (Q12CCPU-V only)
- Ethernet and RS-232 interface on board
- Q12DCCPU-V with additional USB interface
- Real time OS VxWorks and Telnet pre-installed
- Standard C/C++ Code can be embedded
- Remote access via networks und support of FTP
- VxWorks communication library and QBF libraries for easy setup
- CODESYS compatibility

Specifications	Q06CCPU-V	Q12DCCPU-V
Number of I/Os	4096 (X/Y0–X/YFFF)	
Memory	Standard ROM: 16 MB (user area: 6 MB); Work RAM: 32 MB (user area: 14 MB); Battery-backed-up RAM: 128 kB	Standard RAM: 3 MB; Work RAM: 128 MB; Battery-backed-up RAM: 128 kB
Operating system	VxWorks Version 5.4 (preinstalled)	VxWorks Version 6.4 (preinstalled)
Programming language	C or C++	
Development tool	Tornado 2.1 (licenses with special conditions for Mitsubishi Electric users are available directly from Wind River)	Workbench 2.6.1
Communication interfaces	RS232 (1 ch.), 10BASE-T/100BASE-TX (1 ch.)	RS232 (1 ch.), 10BASE-T/100BASE-TX (2 ch.), USB (1 ch.)
Data format	1 start bit, 7 or 8 data bits, 1 or 0 parity bits, 1 or 2 stop bits	
Parity check	Parity checking can be activated by the user	
Checksum	Checksum can be activated by the user	
Data communications control	By control of the RS and CS signals (user-configurable)	
Connection of external wiring	9-pin SubD (RS-232), RJ45 (Ethernet)	
CF card I/F	1 slot for a TYPE I card (Max. 1 GB CF card is supported)	1 slot for a TYPE I card (Max. 8 GB CF card is supported)
Integrated clock	Year, month, day, minute, second, weekday (automatic leap year adjustment)	
Max. compensation time at power failure	Depends on power supply	
Internal power consumption (5 V DC)	A 0.71	0.93
Weight	kg 0.17	0.24
Dimensions (WxHxD)	mm 27.4x98x89.3	27.4x98x115
Order information	Art. no. 165353	221925
Accessories	Programming via Ethernet, cross-link cable (X-Link) may be required. Programming software C Controller Configurator V0100-1LOC-E; art. no. 165367 A special development suite (Tornado, WindView, Sniff+) for the Q06CCPU is available worldwide from any Wind River branch, just quote our contract no. 209356. A free demo version is available for testing. The development tool Workbench 2.6.1 is available from Wind River Systems.	

■ Motion CPU Modules

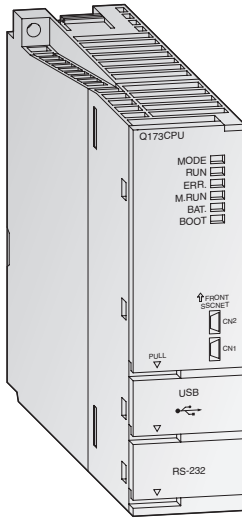

The high-speed dynamic motion CPU

The motion controller CPU controls and synchronizes the connected servo amplifiers and servo motors. A motion system besides the controller CPU as well includes a PLC CPU. Only after combining a highly dynamic positioning control and a PLC an innovative and autarkical motion control system is created.


While the Motion CPU controls large-scale servo movements the PLC CPU is responsible for the machine control and the communication at the same time.

Special features:

- Using multiple CPUs to distribute the load improves the overall performance of the whole system
- Use of up to 3 motion CPUs within one system
- Large scale control system for up to 96 axes per system
- Interpolation of 4 axes simultaneously
- Software cam control
- Virtual and real master axes
- Integration in the high-speed SSCNETIII network for communication with high-performance servo amplifiers at up to 5.6 Mbit/s

Specifications	Q172DCPU	Q172DSCPU	Q172HCPU	Q173DCPU	Q173DSCPU	Q173HCPU	
Type	Motion CPU	Motion CPU	Motion CPU	Motion CPU	Motion CPU	Motion CPU	
I/O points	8192	8192	8192	8192	8192	8192	
No. of control axes	8	16	8	32	32	32	
Interpolation functions	Linear interpolation for up to 4 axes, circular interpolation for 2 axes, helical interpolation for 3 axes						
Positioning	Method	PTP (point to point), speed control/speed-position control, fixed pitch feed, constant speed control, position follow-up control, speed switching control, high-speed oscillation control, synchronous control (SV22)					
	Acceleration/ deceleration control	Automatic trapezoidal acceleration/deceleration, S-curve acceleration/deceleration					
	Compensation	Backlash compensation, electronic gear					
Programming language	Motion SFC, dedicated instructions, software for conveyor assembly (SV13), virtual mechanical support language (SV22)						
Processing speed	SV13	0.44 ms (1.–6. axis), 0.88 ms (7.–8. axis)	0.22 ms (1.–4. axis), 0.44 ms (5.–10. axis), 0.88 ms (11.–16. axis)	0.44 ms (1.–3. axis), 0.88 ms (1.–8. axis)	0.88 ms (1.–6. axis), 1.77 ms (7.–18. axis), 3.55 ms (19.–32. axis)	0.22 ms (1.–4. axis), 0.44 ms (5.–10. axis), 0.88 ms (11.–24. axis), 1.77 ms (25.–32. axis)	0.44 ms (1.–3. axis), 0.88 ms (4.–10. axis), 1.77 ms (11.–20. axis), 3.55 ms (21.–32. axis)
	SV22	0.44 ms (1.–4. axis), 0.88 ms (5.–8. axis)	0.44 ms (1.–6. axis), 0.88 ms (7.–16. axis)	0.88 ms (1.–4. axis), 1.77 ms (5.–8. axis)	0.44 ms (1.–4. axis), 0.88 ms (5.–12. axis), 1.77 ms (13.–28. axis), 3.55 ms (29.–32. axis)	0.44 ms (1.–6. axis), 0.88 ms (7.–16. axis), 1.77 ms (17.–32. axis)	0.88 ms (1.–5. axis), 1.77 ms (6.–14. axis), 3.55 ms (15.–28. axis), 7.11 ms (29.–32. axis)
Program capacity	14 k steps	16 k steps	14 k steps	14 k steps	16 k steps	14 k steps	
No. of positioning points	3200						
Program execution	Number of multi executed programs	Max. 256					
	Number of multi active steps	Max. 256 steps in all programs					
	Executed tasks	normal	Executed in motion main cycle				
		interrupt	Executed in fixed cycles (0.88 ms, 1.7 ms, 3.5 ms, 7.1 ms, 14.2 ms), 16 external interrupt points (Q160 interrupt module inputs), executed with interrupt from PLC CPU (when executing the S(P).GINT instruction)				
NMI	16 points; executed when input ON is set among an interrupt module (e.g. Q160)						
Interfaces	SSCNETIII (USB, RS232C via PLC CPU)		USB, RS232C, SSCNETIII	SSCNETIII (USB, RS232C via PLC CPU)		USB, RS232C, SSCNETIII	
Real I/O points (PX/PY)	256 (these I/Os can be allocated directly to the motion CPU)						
Certifications	CE, UL & cUL	CE, UL & cUL	CE, UL & cUL	CE, UL & cUL	CE, UL & cUL	CE, UL & cUL	
Internal power consumption (5 V DC)	1.14	1.44	1.14	1.25	1.75	1.25	
Weight	0.33	0.38	0.25	0.33	0.38	0.23	
Dimensions (WxHxD)	27.4x98x119.3	27.4x120.5x120.3	27.4x98x114.3	27.4x98x119.3	27.4x120.5x120.3	27.4x98x114.3	
Order information	Art. no.	209788	248700	162417	209787	248701	162696
Accessories	Interface modules for manual pulse generator, encoder and external signals (for detailed informations please refer to the catalogue "Motion Controller MELSEC System Q")						

■ Safety CPU Module

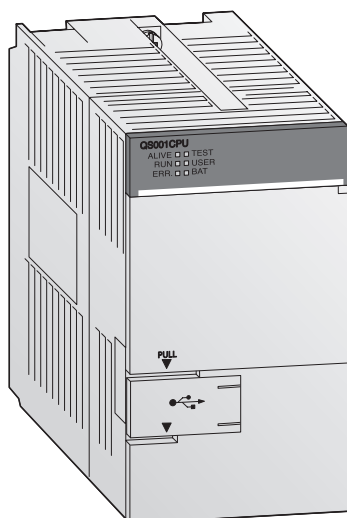

Safety control with QS Safety PLC

The CC-Link Safety network eliminates the complex wiring needed in conventional safety controller systems. The remote Safety I/O stations are connected to the CC-Link Safety master module in the Safety PLC using standard CC-Link cables. In the event of communications errors powerful and effective error identification routines automatically switch off the outputs of both the Safety PLC and the remote Safety I/O stations.


CC-Link Safety is also compatible with CC-Link. This means you can also use standard CC-Link I/O modules in a CC-Link Safety network for those inputs and outputs that are not critical for safety.

Special features:

- Conforms to the safety requirements of EN 954-1 Category 4, ISO 13849-1 PL e, and IEC 61508 (JIS C 0508) SIL 3 and certified by TÜV Rheinland
- Automatic checking of safety inputs and outputs and external devices (cable breaks, short circuits, fused contactor contacts etc.)
- Program and configure with the familiar GX Developer programming software packages. No new skills or software are required.
- Reduced wiring requirements cuts costs
- Comprehensive diagnostics functions
- Versatile: A single Safety CPU can control up to 84 remote safety stations
- The CC-Link standard enables connection of third-party products compatible with the safety concept

Specifications	QS001CPU
I/O points	4096/8192
Control method	Cyclic program execution
Programming language (Sequence Control)	Relay symbol language, function block
Processing speed	0.10–0.35 μs
Constant scan	1–2,000 ms (setting unit: 1 ms)
Program capacity	14 k steps (56 kB)
Memory capacity	128 kB
Max. number of stored files	3
Internal relay (M)	6144
Link relay (B)	2048
Timer (T)	512
Counter (C)	512
Data register (D)	6144
Link register (W)	2048
Annunciator (F)	1024
RUN/PAUSE contact	RUN contact: 1 point can be set in the range of X0 to 17FF, PAUSE contact: None
Clock function	Year, month, date, hour, minute, second, day (automatic leap-year detection)
Internal power consumption(5 V DC)	A 0.43
Weight	kg 0.29
Dimensions (WxHxD)	mm 55.2x98x113.8
Order information	Art. no. 203205

Digital Input Modules

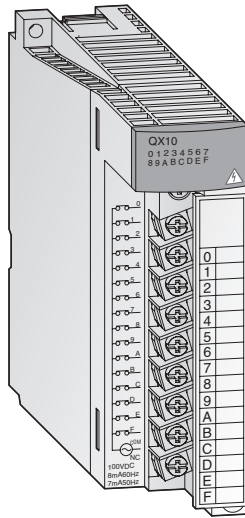

Detection of process signals

Various input modules are available for converting the digital process signals with different voltage levels into the levels required by the PLC.



Special features:

- Potential isolation between process and control by means of an optocoupler is a standard feature.
- Indication of input status via LEDs
- Modules with 16 connection points have removable terminal blocks with screws.
- Assembled cables are available for modules with plugs.
- Different system terminals for module wiring simplification are available.

Specifications	QX10	QX10-TS	QX28	QX40	QX40-TS	QX41	QX42
Input points	16	16	8	16	16	32	64
Insulation method	Photocoupler insulation between input terminals and PC power for all modules.						
Rated input voltage	100–120 V AC (50/60 Hz)	100–120 V AC (50/60 Hz)	100–240 V AC (50/60 Hz)	24 V DC	24 V DC	24 V DC	24 V DC
Operating voltage range	V 85–132	85–132	85–264	20.4–28.8	20.4–28.8	20.4–28.8	20.4–28.8
Max. simultaneously ON (at rated voltage)	100 % ^②	100 % ^②	100 %	100 % (sink type)	100 % (sink type)	100 % (sink type)	100 % ^② (sink type)
Inrush current	200 mA for 1 ms (at 132 V AC)	200 mA for 1 ms (at 132 V AC)	200 mA for 1 ms (at 132 V AC)	—	—	—	—
Rated input current	mA 7 (100 V AC, 50 Hz), 8 (100 V AC, 60 Hz)	8 (100 V AC, 60 Hz), 7 (100 V AC, 50 Hz)	7 (100 V AC, 50 Hz), 8 (100 V AC, 60 Hz), 14 (200 V AC, 50 Hz), 17 (200 V AC, 60 Hz)	approx. 4	approx. 4	approx. 4	approx. 4
ON	Voltage V ≥AC 80	≥AC 80	≥AC 80	≥DC 19	≥DC 19	≥DC 19	≥DC 19
	Current mA ≥AC 5	≥AC 5	≥AC 5	≥DC 3	≥DC 3	≥DC 3	≥DC 3
OFF	Voltage V ≤AC 30	≤AC 30	≤AC 30	≤DC 11	≤DC 11	≤DC 11	≥DC 11
	Current mA ≤AC 1	≤AC 1.7	≤AC 1	≤DC 1.7	≤DC 1.7	≤DC 1.7	≥DC 1.7
Load resistance	kΩ Approx. 18 (50 Hz) Approx. 15 (60 Hz)	approx. 12 (50 Hz) approx. 15 (60 Hz)	approx. 15 (50 Hz) approx. 12 (60 Hz)	approx. 5.6	—	approx. 5.6	approx. 5.6
Response time	OFF → ON ms ≤15 (100 V AC, 50/60 Hz)	≤15 (100 V AC, 50/60 Hz)	≤15 (100 V AC, 50/60 Hz)	1–70 ^①	1–70 ^①	1–70 ^①	1–70 ^①
	ON → OFF ms ≤20 (100 V AC, 50/60 Hz)	≤20 (100 V AC, 50/60 Hz)	≤20 (100 V AC, 50/60 Hz)	1–70 ^①	1–70 ^①	1–70 ^①	1–70 ^①
Common terminal arrangement	16	16	8	16	16	32	32
Power indicator	All modules possess a status LED per input/output.						
Connection terminal	18-point removable terminal block with screws	Removable terminal block with spring terminals	18-point removable terminal block with screws	18-point removable terminal block with screws	Removable terminal block with spring terminals	40-pin connector	40-pin connector x 2
No. of occupied I/O points	16	16	16	16	16	32	64
Applicable wire size	mm ² 0.3–0.75	0.3–0.75	0.3–0.75	0.3–0.75	0.3–0.75	0.3	0.3
Internal power consumption (5 V DC)	mA 50 (all input points ON)	50 (all input points ON)	50 (all input points ON)	50 (all input points ON)	60 (all input points ON)	75 (all input points ON)	90 (all input points ON)
Weight	kg 0.17	0.17	0.20	0.16	0.20	0.15	0.18
Dimensions (WxHxD)	mm 27.4x98x90	27.4x98x90	27.4x98x90	27.4x98x90	27.4x98x90	27.4x98x90	27.4x98x90
Order information	Art. no. 129581	221838	136396	132572	221839	132573	132574
Accessories	40-pin connector and ready to use connection cables (refer to pages 57–58); Spring clamp terminal block for exchange against the standard screw terminal block (refer to page 60)						

① CPU parameter setting (default setting: 10 ms)
 ② at 45 °C

■ Digital Input Modules

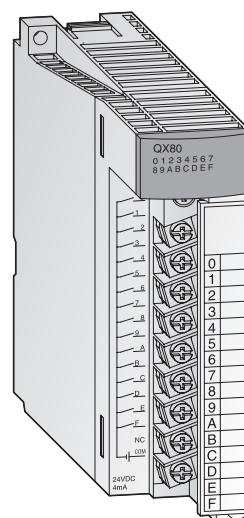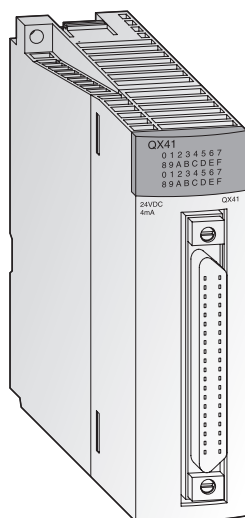


Specifications	QX50	QX80	QX80-TS	QX81	QX82-S1
Input points	16	16	16	32	64
Insulation method	Photocoupler insulation between input terminals and PC power for all modules.				
Rated input voltage	48 V DC	24 V DC	24 V DC	24 V DC	24 V DC
Operating voltage range	V 40.8–52.8	20.4–28.8	20.4–28.8	20.4–28.8	20.4–28.8
Max. simultaneously ON (at rated voltage)	100 %	100 %	100 %	100 %	100 % ②
Inrush current	—	—	—	—	—
Rated input current	mA Approx. 4	approx. 4	approx. 4	approx. 4	approx. 4
ON	Voltage	V \geq DC 28	\geq DC 19	\geq DC 19	\geq DC 19
	Current	mA \geq DC 2.5	\geq DC 3	\geq DC 3	\geq DC 3
OFF	Voltage	V \geq DC 10	\leq DC 11	\leq DC 11	\leq DC 9.5
	Current	mA \geq DC 1.7	\leq DC 1.7	\leq DC 1.7	\leq DC 1.5
Load resistance	k Ω Approx. 11.2	approx. 5.6	approx. 5.6	approx. 5.6	approx. 5.6
Response time	OFF \rightarrow ON	ms 1–70 ①	1–70 ①	1–70 ①	1–70 ①
	ON \rightarrow OFF	ms 1–70 ①	1–70 ①	1–70 ①	1–70 ①
Common terminal arrangement	16	16	16	32	32 x 2
Power indicator	All modules with 16 and 32 inputs possess a status LED per input. For modules with 64 inputs the indication is switchable.				
Connection terminal	18-point removable terminal block with screws	18-point removable terminal block with screws	Removable terminal block with spring terminals	Compact connector 37-pin D-Sub	40-pin connector x 2
No. of occupied I/O points	16	16	16	32	64
Applicable wire size	mm ² 0.3–0.75	0.3–0.75	0.3–0.75	0.3	0.3
Internal power consumption (5 V DC)	mA 50 (all input points ON)	50 (all input points ON)	50 (all input points ON)	75 (all input points ON)	90 (all input points ON)
Weight	kg 0.13	0.16	0.16	0.16	0.18
Dimensions (WxHxD)	mm 27.4x98x90	27.4x98x90	27.4x98x90	27.4x98x90	27.4x98x90
Order information	Art. no. 204678	127587	221840	129594	150837
Accessories	40-pin connector and ready to use connection cables (refer to pages 57–58); Spring clamp terminal block for exchange against the standard screw terminal block (refer to page 60)				

① CPU parameter setting (default setting: 10 ms)

② at 45 °C

■ Digital Output Modules

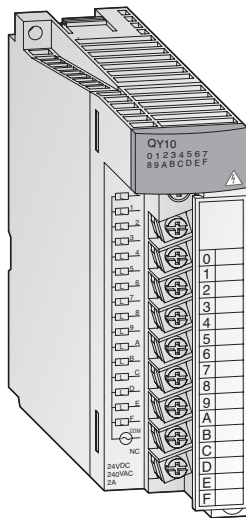

Adapted output technology

The MELSEC System Q output modules have different switching elements for adaptation to many control tasks.



Special features:

- Output modules with relay, transistor or triac switches
- Potential isolation between process and control by means of an optocoupler is a standard feature
- Modules with potential isolation between the channels
- Modules with 16 protection points have removable terminal blocks with screws
- Assembled cables are available for modules with D-sub plugs (Q32CBL: 3 m or 5 m; Q40CBL: 3 m or 5 m).
- Different system terminals for simplified cabling and to supplement the performance of the modules are available.

Specifications	QY10	QY10-TS	QY18A	QY22	QY40P	QY40P-TS	QY41P	QY42P	
Outputs	16	16	8	16	16	16	32	64	
Output type	Relay	Relay	Relay	Triac	Transistor (sink type)	Transistor (sink type)	Transistor (sink type)	Transistor (sink type)	
Common terminal arrangement points	16	16	8	16	16	16	32	32	
Insulation method	Relay	Relay	Relay	Photocoupler insulation between output terminals and PC power					
Rated output voltage	24 V DC/240 V AC	24 V DC/240 V AC	24 V DC/240 V AC	100–240 V AC	12/24 V DC (sink type)	12/24 V DC (sink type)	12/24 V DC (sink type)	12/24 V DC (sink type)	
Operating voltage range	—	—	—	—	10.2–28.8 V DC	10.2–28.8 V DC	10.2–28.8 V DC	10.2–28.8 V DC	
Min. switching load	5 V DC (1 mA)	5 V DC (1 mA)	5 V DC (1 mA)	24 V AC (100 mA) 100 V AC (25 mA) 240 V AC (25 mA)	—	—	—	—	
Max. switching voltage	125 V DC/264 V AC	125 V DC/264 V AC	125 V DC/264 V AC	288 V AC	—	—	—	—	
Max. output current	A 2	2	2	0.6	0.1	0.1	0.1	0.1	
Output current per group TYP	A 8	8	8	4.8	1.6	1.6	2	2	
Inrush current	—	—	—	—	0.7 A for 10 ms	0.7 A for 10 ms	0.7 A for 10 ms	0.7 A for 10 ms	
Leakage current at OFF	mA —	—	—	≤1.5 (120 V AC), ≤3 (240 V AC)	≤0.1	≤0.1	≤0.1	≤0.1	
Response time	OFF → ON ms ≤10	≤10	≤10	1	≤1	≤1	≤1	≤1	
	ON → OFF ms ≤12	≤12	≤12	1	≤1	≤1	≤1	≤1	
Life	Mechanical	Switching 20 million times		—	—	—	—	—	
	Electrical	Switching 100000 times or more		—	—	—	—	—	
Max. switching frequency	Switching 3600 times/h		—	—	—	—	—	—	
Noise suppression	—	—	—	CR absorber	Zener diode	Zener diode	—	—	
Fuse	—	—	—	—	—	—	Short-circuit proof	Short-circuit proof	
Power indicator	All modules possess a status LED per output.								
Fuse blown indicator	—	—	—	—	—	—	—	—	
Connection terminal	18-point removable terminal block with screws	Removable terminal block with spring terminals	18-point removable terminal block with screws	18-point removable terminal block with screws	18-point removable terminal block with screws	Removable terminal block with spring terminals	40-pin connector	40-pin connector x 2	
I/O points	16	16	16	16	16	16	32	64	
Applicable wire size	mm ² 0.3–0.75	0.3–0.75	0.3–0.75	0.3–0.75	0.3–0.75	0.3–0.75	0.3	0.3	
Ext. power supply req.	Voltage	—	—	—	12–24 V DC	12–24 V DC	12–24 V DC	12–24 V DC	
	Current	—	—	—	10 (24 V DC)	10 (24 V DC)	20 (24 V DC)	20 (24 V DC)	
Internal power consumption (5 V DC)	mA 430	430	430	250	65	65	105	150	
Weight	kg 0.22	0.22	0.22	0.40	0.16	0.16	0.15	0.17	
Dimensions (WxHxD)	mm 27.4x98x90	27.4x98x90	27.4x98x90	27.4x98x90	27.4x98x90	27.4x98x90	27.4x98x90	27.4x98x90	
Order information	Art. no.	129605	221841	136401	136402	132575	221842	132576	132577


Accessories 40-pin connector and ready to use connection cables (refer to pages 57–58); Spring clamp terminal block for exchange against the standard screw terminal block (refer to page 60)

■ Digital Output Modules

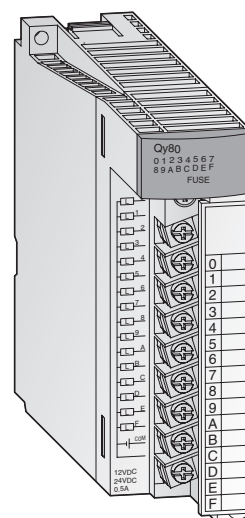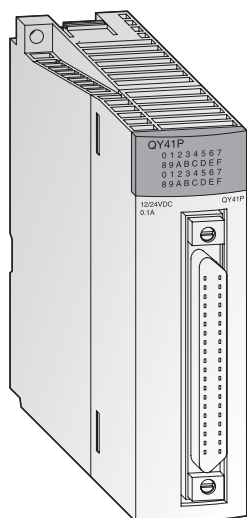

Specifications	QY50	QY68A	QY80	QY80-TS	QY81P	QY82P
Outputs	16	8	16	16	32	64
Output type	Transistor (sink type)	Transistor (sink/source type)	Transistor (source type)	Transistor (source type)	Transistor (source type)	Transistor (source type)
Common terminal arrangement	points	16	8	16	16	32
Insulation method	Photocoupler insulation between output terminals and PC power					
Rated output voltage	12/24 V DC (sink type)	5–24 V DC	12/24 V DC (source type)	12/24 V DC (source type)	12/24 V DC (source type)	12/24 V DC (source type)
Operating voltage range	10.2–28.8 V DC	4.5–28.8 V DC	10.2–28.8 V DC	10.2–28.8 V DC	10.2–28.8 V DC	10.2–28.8 V DC
Max. output current	A	0.5	2	0.5	0.5	0.1
Output current per group TYP	A	4	—	4	4	2
Inrush current	0.7 A for 10 ms	8 A for 10 ms	4 A for ≤10 ms	4 A for ≤10 ms	0.7 A for ≤10 ms	0.7 A for ≤10 ms
Leakage current at OFF	mA	≤0.1	≤0.1	≤0.1	≤0.1	≤0.1
Response time	OFF → ON	ms	≤1	≤3	1	1
	ON → OFF	ms	≤1	≤10	1	1
Noise suppression	Zener diode	Zener diode	Zener diode	Zener diode	Zener diode	Zener diode
Fuse	A	6.7	—	4 A (2 pices)	4 A (2 pices)	Short-circuit proof
Power indicator	All modules possess a status LED per output.					
Fuse blown indicator	LED	—	LED	LED	LED	—
Connection terminal	18-point removable terminal block with screws	18-point removable terminal block with screws	18-point removable terminal block with screws	Removable terminal block with spring terminals	Compact connector 37-pin D-Sub	40-pin connector x 2
I/O points	16	16	16	16	32	64
Applicable wire size	mm ²	0.3–0.75	0.3–0.75	0.3–0.75	0.3	0.3
Ext. power supply req.	Voltage	12–24 V DC	—	12–24 V DC	12–24 V DC	12–24 V DC
	Current	mA	20 mA (24 V DC)	—	20 mA (24 V DC)	20 mA (24 V DC)
Internal power consumption (5 V DC)	mA	80	110	80	80	95
Weight	kg	0.17	0.14	0.17	0.17	0.15
Dimensions (WxHxD)	mm	27.4x98x90	27.4x98x90	27.4x98x90	27.4x98x90	27.4x98x90
Order information	Art. no.	132578	136403	127588	221843	129607
Accessories	40-pin connector and ready to use connection cables (refer to pages 57–58); Spring clamp terminal block for exchange against the standard screw terminal block (refer to page 60)					

■ Analog Input Modules

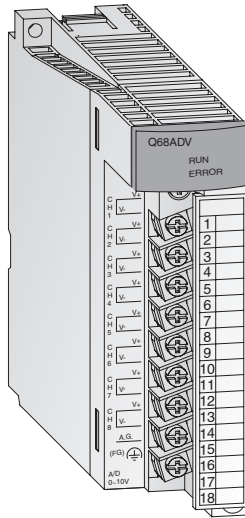

Detection of analog process signals

The analog input modules convert analog process signals, for example pressure, flow or fill level, linearly into digital values, which are further processed by the Q CPU.


Special features:

- Up to 8 channels per module (Q68AD□) and up to 256 channels per system (Q CPU)
- Resolution of 0.83 mV and 3.33 μA (Q64AD)
- Conversion time of 80 μs/channel (Q68AD□)
- Calculation of average value over the time or measurement cycles can be configured
- Integrated logging function (Q64ADH)
- Flow amount measurement function (Q64ADH)
- Potential isolation between process and control by means of an optocoupler is a standard feature.
- All modules are provided with a removable terminal block fastened with screws..

Specifications	Q64AD	Q64ADH	Q68ADV	Q68ADI	
Input points	4	4	8	8	
Analog input	-10 V/+10 V (0 mA/+20 mA)	-10 V/+10 V (0 mA/+20 mA)	-10 V/+10 V	0 mA/+20 mA	
Resolution	16 bits binary (incl. sign)	16 bits binary (incl. sign)	16 bits binary (incl. sign)	16 bits binary (incl. sign)	
Load resistance	Voltage MΩ	1	1	1	
	Current Ω	250	250	250	
Max. input	Voltage V	±15	±15	±15	
	Current mA	±30	±30	±30	
I/O characteristics ①	Analog input	-10—+10 V	0—20 mA	-10—+10 V	0—20 mA
	Digital output	1/4000, 1/12000, 1/16000	1/4000, 1/8000, 1/12000	1/20000, 1/22500	1/4000, 1/12000, 1/16000
Max. resolution	Voltage input	2.5 mV	500 μV	2.5 mV	—
		1.25 mV	250 μV	5 mV	—
	Current input	0.83 mV	219 μV	1.25 mV	—
		—	200 μV	1 mV	—
		10 μA	1000 nA	—	0—20 mA
		5 μA	878 nA	—	4—20 mA
		3.33 μA	800 nA	—	—
Overall accuracy	±0.4 % (0–55 °C), ±0.1 % (20–30 °C)		±0.2 % (0–55 °C), ±0.1 % (20–30 °C)		
Max. conversion time	80 μs/channel (+160 μs with temperature drift compensation)				
Insulation method	Photocoupler insulation between output terminals and PC power for all modules.				
I/O points	16	16	16	16	
Connection terminal	All modules are fitted with a terminal block with 18 screw terminals.				
External power consumption	Not necessary for any module				
Applicable wire size	mm ²	0.3–0.75	0.3–0.75	0.3–0.75	
Internal power consumption (5 V DC)	mA	630	520	640	
Weight	kg	0.14	0.18	0.19	
Dimensions (WxHxD)	mm	27.4x98x90	27.4x98x90	27.4x98x90	
Order information	Art. no.	129615	251331	129616	129617

① ±0.4 % (0–55 °C); ±0.1 % (20–30 °C)

■ Analog Input Modules

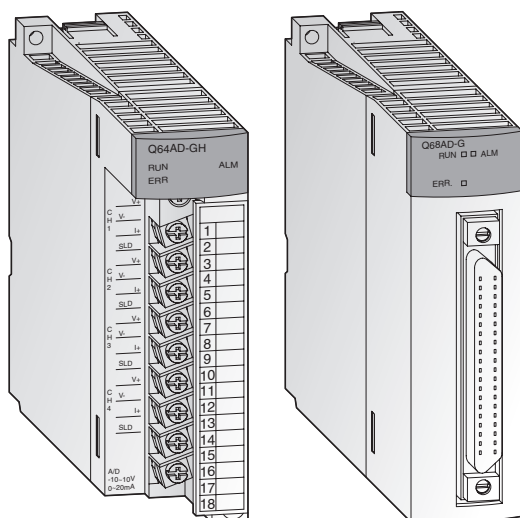

Channel isolated and high resolution

The analog input modules convert analog process signals into digital values with high accuracy. With the exception of the ME1AD8HAI-Q, all channels are isolated between each other and against the external power supply with high dielectric withstand voltage for both.


The ME1AD8HAI-Q provides a HART master function and can communicate with up to eight HART-enabled devices. The connection of standard analog input devices is also supported.

Special features:

- Potential isolation between each channel and between process and control is a standard feature.
- High resolution: 16/32 bit signed binary
- High accuracy with a reference accuracy of $\pm 0.05\%$ and a temperature coefficient of ± 71.4 ppm/ $^{\circ}\text{C}$
- Integrated short circuit protection by limiting the input current
- Signal conditioning function for the Q62AD-DGH
- Q66AD-DG signal converter
- Power supply for 2-wire transmitter (Q66AD-GD, ME1AD8HAI-Q)
- A primary delay filter smoothes out the line of digital output values by a user-defined time constant
- Terminal block is fastened with screws and removable.

Specifications	Q62AD-DGH	Q64AD-GH	Q66AD-DG	Q68AD-G	ME1AD8HAI-Q	
Input points	2	4	6	8	8	
Analog input	+4 mA/+20 mA	-10 V/+10 V (0 mA/+20 mA)	0 mA/+4 mA/20 mA	-10 V/+10 V (0 mA/+20 mA)	0 mA/+4 mA/+20 mA	
Resolution	16/32 bits binary (incl. sign)	16/32 bits binary (incl. sign)	16 bits binary (incl. sign)	16 bits binary (incl. sign)	16 bits signed binary	
Load resistance	Voltage	MΩ	—	1	—	
	Current	Ω	250	250	250	
Max. input	Voltage	V	±15	±15	—	
	Current	mA	±30	±30	±30	
I/O characteristics	Analog input	4–20 mA	-10–+10 V	0–20 mA	-10–+10 V; 0–20 mA	0–20 mA; 4–20 mA
	Digital output	0–32000 (16 bits) 0–64000 (32 bits)	-32000–+32000 (16 bits), -64000–+64000 (32 bits), 0–32000 (16 bits), 0–64000 (32 bits)	-96–+4095 (16 bits), -288–+12287 (16 bits)	-12288–+12287 (16 bits), -16384–+16383 (16 bits), -32768–+32767 (16 bits)	0–32000 (16 bits, 32 bits)
Max. resolution	Voltage input	—	0–10 V: 156.3 μV (32 bits), 312.6 μV (16 bits), 0–5 V: 78.2 μV (32 bits), 156.4 μV (16 bits), 1–5 V: 62.5 μV (32 bits), 125.0 μV (16 bits), -10–10 V: 156.3 μV (32 bits), 312.6 μV (16 bits)	—	0–10 V: 0.625 mV (16 bits), 0–5 V: 0.416 mV (16 bits), 1–5 V: 0.333 mV (16 bits), -10–10 V: 0.625 mV (16 bits), user defined: 0.333mV (16 bits)	—
	Current input	4–20 mA: 0.25 μA (32 bits), 0.50 μA (16 bits), user defined: 0.151 μA (32 bits), 0.303 μA (16 bits)	0–20 mA: 0.312 μA (32 bits), 0.625 μA (16 bits) 4–20 mA: 0.25 μA (32 bits), 0.50 μA (16 bits) user defined: 0.151 μA (32 bits), 0.303 μA (16 bits)	0–20 mA: 1.66 μA (16 bits) 4–20 mA: 1.33 μA (16 bits) user defined: 1.33 μA (16 bits)	0–20 mA: 1.66 μA (16 bits) 4–20 mA: 1.33 μA (16 bits) user defined: 1.33 μA (16 bits)	0–20 mA: 0.625 μA 4–20 mA: 0.50 μA
Overall accuracy	±0.05 %	±0.05 %	±0.1 %	±0.1 %	±0.15 %	
Temperature coefficient	±71.4 ppm/ $^{\circ}\text{C}$ (0.00714 %/ $^{\circ}\text{C}$)	±71.4 ppm/ $^{\circ}\text{C}$ (0.00714 %/ $^{\circ}\text{C}$)	±71.4 ppm/ $^{\circ}\text{C}$ (0.00714 %/ $^{\circ}\text{C}$)	±71.4 ppm/ $^{\circ}\text{C}$ (0.00714 %/ $^{\circ}\text{C}$)	—	
Max. conversion time	10 ms/2 channels	10 ms/4 channels	10 ms/channel	10 ms/channel	80 ms (channel independent)	
Insulation method	Photocoupler insulation between each channel	Photocoupler insulation between each channel	Transformer insulation between the input channels and between the channels and PLC power	Transformer insulation between the input channels and between the channels and PLC power	Photocoupler insulation between the channels and OLC power; No insulation between analog input channels	
I/O points	16	16	16	16	32	
Connection terminal	18-point removable terminal block with screws	18-point removable terminal block with screws	40-pin connector at the front	40-pin connector at the front	18-point removable terminal block with screws	
External power consumption	24 V DC, 360 mA	Not necessary	24 V DC, 360 mA	Not necessary	24 V DC, 300 mA	
Applicable wire size	mm ²	0.3–0.75	0.3–0.75	0.3	0.51	
Internal power consumption (5 V DC)	mA	220	890	420	460	
Weight	kg	0.19	0.20	0.22	0.16	
Dimensions (WxHxD)	mm	27.4x98x90	27.4x98x90	27.4x102x130	27.4x102x90	
Order information	Art. no.	145036	143542	204676	204675	229238

■ Analog Output Modules

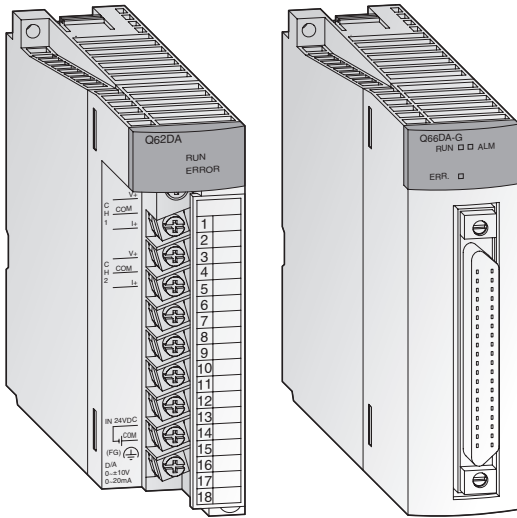

Output of analog control signals

The analog output modules convert digital values predetermined by the CPU into an analog current or voltage signal. For example, frequency inverters, valves or slide valves are controlled by means of these signals.

The functionality of a HART Master station is integrated in the ME1AD8HAI-Q. It can communicate with up to 8 HART compatible devices.

Special features:


- Up to 8 channels per module (Q68DA□) and up to 256 channels per system
- Resolution of 0.333 mV and 0.83 μA
- Conversion time of 80 μs/channel
- Potential isolation between process and control by means of an optocoupler is a standard feature. Additional potential isolation between the channels for the Q62DANQ, 62DAN-FGQ, 68DAVN and Q68DAIN.
- Disconnection detection function that monitors the output values by means of re-conversion and limit exceeding function (Q62DAN-FG only)
- The modules are provided with a removable terminal block fastened with screws.

Specifications	Q62DAN	Q62DA-FG	Q64DAN	Q66DA-G	Q68DAVN	Q68DAIN	ME1DA6HAI-Q	
Output points	2	2	4	6	8	8	6	
Digital input	-4096+4095 -12288+12287 -16384+16383	-4096+4095 -12288+12287 -16384+16383	-4096+4095 -12288+12287 -16384+16383	-4096+4095 -12288+12287 -16384+16383	-4096+4095 -12288+12287 -16384+16383	-4096+4095 -12288+12287 -16384+16383	0-28000 -32768+32767	
Analog output	-10 V DC--+10 V DC (0 mA--+20 mA DC)	-10 V DC--+10 V DC (0 mA--+20 mA DC)	-10 V DC--+10 V DC (0 mA--+20 mA DC)	-12 V DC--+12 V DC (0 mA--+22 mA DC)	-10 V DC--+10 V DC	0 mA--+20 mA DC	0/4 mA--+20 mA DC	
Load resistance	Voltage output	1 kΩ-1 MΩ	1 kΩ-1 MΩ	1 kΩ-1 MΩ	1 kΩ-1 MΩ	—	—	
	Current output	0-600 Ω	0-600 Ω	0-600 Ω	0-600 Ω	—	50-600 Ω	
Max. outputs	Voltage V	±12	±13	±12	±13	—	—	
	Current mA	21	23	21	23	—	21	
Voltage output ①								
I/O characteristics	Voltage output	0-5 V	0-5 V	1-5 V	-10--+10 V	-10--+10 V	user defined	—
	Digital Input	0-4000	0-12000	0-12000	-4000-4000	-16000-16000	-4000-4000	—
Max. resolution	1.25 mV	0.416 mV	0.333 mV	2.5 mV	0.625 mV	0.75 mV	—	
Current output ②								
I/O characteristics	Current output	0-20 mA	0-20 mA	4-20 mA	4-20 mA	user defined	user defined	0-20 mA
	Digital Input	0-4000	0-12000	0-4000	0-12000	-4000-4000	-12000-12000	0-28000
Max. resolution	5 μA	4 μA	1.66 μA	1.33 μA	1.5 μA	0.83 μA	571 nA	
Overall accuracy	± 0.3 % (0-55 °C); ± 0.1 % (20-30 °C)							
Max. conversion time	80 μs/channel	10 ms/2 channels	80 μs/channel	6 ms/channel	80 μs/channel	80 μs/channel	70 ms	
Insulation method	Photocoupler insulation between output terminals and PLC power	Each output is photocoupler insulated between each other and against the PLC power	Photocoupler insulation between output terminals and PLC power	Transformer insulation between the output channels and between the channels and PLC power.	Photocoupler insulation between output terminals and PLC power			
I/O points	16	16	16	16	16	16	32	
Connection terminal	18-point removable terminal block with screws			40-pin connector at the front	18-point removable terminal block with screws			
Applicable wire size	mm ²	0.3-0.75	0.3-0.75	0.3	0.3-0.75	0.3-0.75	According to HART specification	
Internal power consumption (5 V DC)	mA	330	370	340	620	390	380	320
Weight	kg	0.19	0.20	0.19	0.22	0.18	0.18	0.19
Dimensions (WxHxD)	mm	27.4x98x90	27.4x98x90	27.4x98x90	27.4x102x130	27.4x98x90	27.4x98x90	27.4x98x90
Order information	Art. no.	200689	145037	200690	204677	200691	200692	236649

① Values are valid for all modules except for Q68DAIN;

② Values are valid for all modules except for Q68DAVN

■ Combined Analog Input/Output Module

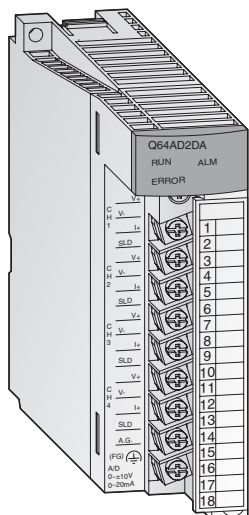

Q64AD2DA


With the analog input/output module Q64AD2DA the user has a module that has both, four analog inputs and two analog outputs. Selection of current or voltage input signal is possible for the analog inputs.

Special features:

- Detection and output of voltage and current with only one module.
- Detection of analog signals with either standard or high resolution

Specifications		Q64AD2DA	
Input points		4	
Analog input	Voltage	V	-10~+10
	Current	mA	0~+20
Load resistance	Voltage	MΩ	1
	Current	Ω	250
Max. input	Voltage	V	±15
	Current	mA	±30
I/O characteristics	Analog input	-10~+10 V; 0~20 mA	
	Digital output	±1/4000, ±1/16000; ±1/4000, ±1/12000	
Max. resolution	Voltage input	0.333 mV	
	Current input	0.83 μA	
Accuracy		±0.4 % (0~55 °C), ±0.1 % (20~30 °C)	
Max. conversion time		500 μs/channel	
Output points		2	
Digital input		-16384~+16383	
Analog output	Voltage	V	-10~+10
	Current	mA	0~+20
Load resistance	Voltage output	1 kΩ~1 MΩ	
	Current output	0~600 Ω	
Max. output	Voltage	V	±12
	Current	mA	21
I/O characteristics	Analog output	-10~+10 V; 0~20 mA	
	Digital input	±1/4000, ±1/16000; ±1/4000, ±1/12000;	
Max. resolution	Voltage output	0.333 mV	
	Current output	1.33 μA	
Accuracy		±0.3 % (0~55 °C), ±0.1 % (20~30 °C)	
Max. conversion time		500 μs/channel	
Connection terminal		18-point removable terminal block with screws	
I/O points		16	
Dimensions (WxHxD)		mm 27.4x98x90	
Order information		Art. no.	229238

■ Analog Modules for Temperature Measurement

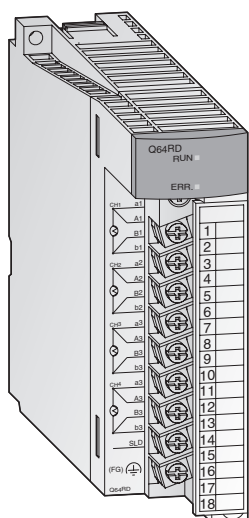

Temperature measurement by temperature sensors

These modules are designed to convert external platinum temperature-measuring resistor input values into 16 or 32-bit signed binary temperature measurement values and scaling values.

The reference temperature is determined by means of a Pt100 resistance thermometer for the Q64RD module (Q64RD-G additionally with Ni100 resistors) and by means of a thermocouple for the Q64TD and Q64TDV-GH modules.


Special features:

- Temperature of 4 channels can be measured by one module
- Two kinds of platinum temperature measuring resistors compliant with the JIS, IEC and DIN standards are supported.
- The disconnection of a platinum temperature-measuring resistor or cable can be detected on each channel
- Selection of sampling processing/time averaging processing/count averaging processing
- Error compensation by offset/gain value setting
- Alarm output when limit value is exceeded
- Potential isolation between process and control by means of an optocoupler is a standard feature. Additional potential isolation between the channels for Q64TDV-GH and Q64RD-G.
- Removable terminal block fastened with screws.

Specifications	Q64RD	Q64RD-G	Q64TD	Q64TDV-GH	Q68RD3-G	Q68TD-G-H01/H02
Input channels	4	4	4	4	8	8
Connectable temperature sensors type	Pt100 (conforms to JIS C 1604-1989 and DIN IEC 751), JPt100 (conforms to JIS C 1604-1981)	Pt100 (conforms to JIS C 1604-1997 and DIN IEC 751-1983), JPt100 (conforms to JIS C 1604-1981), Ni100Ω (conforms to DIN 43760-1987)	K, E, J, T, B, R, S, N (conforms to JIS C1602-1995, IEC 584-1 and 584-2)	K, E, J, T, B, R, S, N (conforms to JIS C1602-1995, IEC 584-1 and 584-2)	Pt100 (conforms to JIS C 1604-1997 and DIN IEC 751), JPt100 (conforms to JIS C 1604-1981), Ni100Ω (conforms to DIN 43760-1987)	K, E, J, T, B, R, S, N (conforms to JIS C1602-1995, IEC 584-1 and 584-2)
Temperature measuring range	Pt100: -200~850 °C, JPt 100: -180~600 °C	Pt100: -200~850 °C, JPt100: -180~600 °C, Ni100 Ω: -60~180 °C	Depends on the thermocouple used	Depends on the thermocouple used	Pt100: -200~850 °C, JPt100: -180~600 °C, Ni100Ω: -60~180 °C	Depends on the thermocouple used
Temperature scaling value	16-bit, signed binary: -2000~+8500 32-bit, signed binary: -200 000~+850 000	16-bit, signed binary: -2000~+8500 32-bit, signed binary: -200 000~+850 000	16-bit, signed binary: -2700~+18 200 32-bit, signed binary: —	16-bit, signed binary: -25 000~+25 000 32-bit, signed binary: —	16-bit, signed binary: -2000~+8500	16-bit, signed binary: -2700~+18 200
Max. resolution °C	0.025 °C	0.025 °C	B, R, S, N: 0.3 °C; K, E, J, T: 0.1 °C	B: 0.7 °C; R, S: 0.8 °C; K, T: 0.3 °C; ET: 0.2 °C; J: 0.1 °C; N: 0.4 °C; Voltage: 4 μV	0.1 °C	B, R, S, N: 0.3 °C; K, E, J, T: 0.1 °C
Cold junction temp. compensation accuracy	—	—	±1.0 °C	±1.0 °C	—	provided
Overall accuracy	±0.08 % (accuracy relative to full-scale value) at ambient temperature 25±5 °C	±0.04 % (accuracy relative to full-scale value) at ambient temperature 25±5 °C	Depends on the thermocouple used	Depends on the thermocouple used	Depends on the thermocouple used	Depends on the thermocouple used
Max. conversion time	40 ms/channel	40 ms/channel	20 ms/channel	20 ms/channel	320 ms/8 channels	320 ms/8 channels (H01), 640 ms/8 channels (H02)
Analog inputs	4 channels/module	4 channels/module	4 channels/module + Pt100 connection	4 channels/module + Pt100 connection	8 channels	8 channels/module
Temp. measurement output current mA	1	1	—	—	1	—
Insulation method	Transformer insulation ①	Photocoupler insulation ② Transformer insulation ③	Transformer insulation ④	Transformer insulation ⑤	Transformer insulation ⑤	Transformer insulation ⑤
Disconnection detection	For each channel independent					
I/O points	16	16	16	16	16	16
Connection terminal	All modules are fitted with a removable terminal block with 18 screw terminals.				A6CON 40pin connector	
Applicable wire size mm ²	0.3~0.75	0.3~0.75	0.3~0.75	0.3~0.75	≤0.3	≤0.3
Internal power consumption (5 V DC) mA	600	620	500	500	0.54 A	0.49 A (H01) 0.65 A (H02)
Weight kg	0.17	0.20	0.25	0.25	0.20	0.17
Dimensions (WxHxD) mm	27.4x98x90	27.4x98x112	27.4x98x90	27.4x98x90	27.4x102x130	27.4x98x90 (H01) 27.4x102x130 (H02)
Order information	Art. no. 137592	154749	137591	143544	216482	216481/221582

① between power supply and temperature inputs ② between each channel and PLC power ③ between measuring input channels
④ between thermocouple inputs as well as thermocouple and earth ⑤ between each channel and between the channels and PLC power

Temperature Control Modules

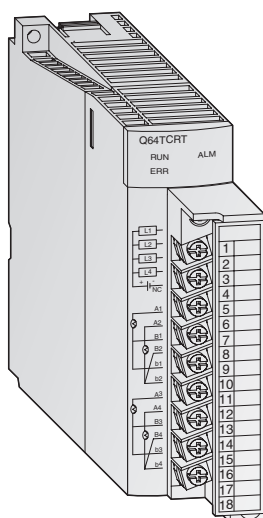

Temperature control modules with PID algorithm


These modules enable PID algorithm temperature control without placing any load on the PLC CPU for the temperature control tasks.

Special features:

- Four temperature input channels
- Auto-tuning function for the 4 PID control circuits
- Temperature control can continue even when the PLC program is stopped
- Transistor output with pulse train to drive the actuator in the control circuit
- The module is provided with a removable terminal block fastened with screws.

Specifications	Q64TCRT	Q64TCRTBW	Q64TCTT	Q64TCTTBW	
Control output type	Transistor	Transistor	Transistor	Transistor	
Inputs	4 channels per module	4 channels per module/ broken wire detection	4 channels per module	4 channels per module/ broken wire detection	
Supported temperature sensors	Pt100 (-200~+600 °C), JPt100 (-200~+500 °C)		R, K, J, T, S, B, E, N, U, L, P L II, W5Re/W26Re		
Sampling cycle	0.5 s/4 channels	0.5 s/4 channels	0.5 s/4 channels	0.5 s/4 channels	
Control output cycle	1-100 s	1-100 s	1-100 s	1-100 s	
Input filter	1-100 s (0 s: input filter OFF)	1-100 s (0 s: input filter OFF)	1-100 s (0 s: input filter OFF)	1-100 s (0 s: input filter OFF)	
Temperature control method	PID ON/OFF impulse or 2-position control		PID ON/OFF impulse or 2-position control		
PID constant range	PID constant setting	Setting with automatic tuning possible		Setting with automatic tuning possible	
	Proportional band P	0.0-1000 % (0 %: 2-position control)		0.0-1000 % (0 %: 2-position control)	
	Integral time I	1-3600 s	1-3600 s	1-3600 s	1-3600 s
	Differential time D	1-3600 s (0 setting for PID control)	1-3600 s (0 setting for PID control)	1-3600 s (0 setting for PID control)	1-3600 s (0 setting for PID control)
Target value setting range	Within the temperature range of the Pt100 sensor used		Within the temperature range of the thermocouple used		
Dead band setting range	0.1-10.0 %	0.1-10.0 %	0.1-10.0 %	0.1-10.0 %	
Transistor output	Output signal (sink)	ON/OFF pulse	ON/OFF pulse	ON/OFF pulse	ON/OFF pulse
	Rated load voltage	10-30 V DC	10-30 V DC	10.2-30 V DC	10.2-30 V DC
	Max. load current	0.1 A/1 point, 0.4 A/common	0.1 A/1 point, 0.4 A/common	0.1 A/1 point, 0.4 A/common	0.1 A/1 point, 0.4 A/common
	Max. rush current	400 mA for 10 ms	400 mA for 10 ms	400 mA for 10 ms	400 mA for 10 ms
	Max. voltage drop when ON	0.1 V DC (TYP) 0.1 A 2.5 V DC (MAX) 0.1 A	0.1 V DC (TYP) 0.1 A 2.5 V DC (MAX) 0.1 A	0.1 V DC (TYP) 0.1 A 2.5 V DC (MAX) 0.1 A	0.1 V DC (TYP) 0.1 A 2.5 V DC (MAX) 0.1 A
Response time	OFF → ON: <2 ms ON → OFF: <2 ms	OFF → ON: <2 ms ON → OFF: <2 ms	OFF → ON: <2 ms ON → OFF: <2 ms	OFF → ON: <2 ms ON → OFF: <2 ms	
Insulation method	Transformer	Transformer	Transformer	Transformer	
I/O points	16/1 slot	32/2 slots	16/1 slot	32/2 slots	
Connection terminals	All modules are fitted with a terminal block with 18 screw terminals.				
Applicable wire size	0.3-0.75 mm ²	0.3-0.75	0.3-0.75	0.3-0.75	
Internal power consumption (5 V DC)	550 mA	60	550	640	
Weight	0.2 kg	0.3	0.2	0.3	
Dimensions (WxHxD)	27.4x98x90 mm	27.4x98x90	27.4x98x90	27.4x98x90	
Order information	Art. no. 136386	136387	136388	136389	

■ Load Cell Input Module

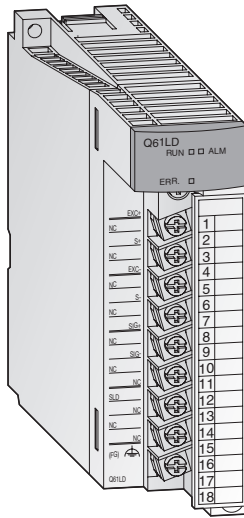


The load cell input module Q61LD can connect load cells directly to MELSEC Q series programmable controllers. External signal converters are no longer required.

Special features:

- An external signal converter is not required. Man-hours and costs are reduced by using a load cell input module that can be connected directly to a programmable controller.
- The module achieves a highly accurate measurement with steady data conversion speed that guarantees the accuracy of load cells.
- Enhanced convenience with functions like zero offset, two-point calibration and input signal error detection.

Specifications	Q61LD
Analog input (load cell output) points	1
Analog input (load cell output) mV/V	0.0–3.3
Analog input range (load cell rated output) mV/V	0.0–1.0 0.0–2.0 0.0–3.0
Load cell applied voltage	5 V DC $\pm 5\%$, Output current within 60 mA (Four 350 Ω load cells can be connected in parallel.) 6-wire system (Combination use of remote sensing method and ratiometric method) or 4-wire system
Digital output	32-bit signed binary, 0–10 000
Gross weight output (Max. weighing output value)	32-bit signed binary, -9999–99999 (Excluding decimal point and unit symbol)
Zero adjustment range mV/V	0.0–3.0
Gain adjustment range mV/V	0.3–3.2
Resolution	0–10 000
Accuracy	Nonlinearity: within $\pm 0.01\%$ /FS (Ambient temperature: 25 °C)
Conversion speed ms	10
Insulation method	Photocoupler insulation
I/O points	16
External connection system	18-point removable terminal block with screws
Applicable wire size mm ²	0.3–0.75
Internal power consumption (5 V DC) A	0.48
Weight kg	0.17
Dimensions (WxHxD) mm	27.4x98x90
Order information	Art. no. 229237

■ Analog CT Input Module

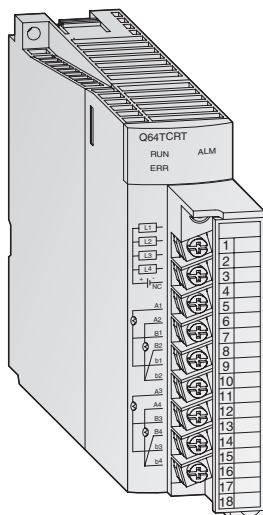

Current transformer module


Up to eight current transformers can be connected directly to the analog CT input module Q68CT. External signal converters are not required anymore.

Special features:

- CT sensors from 5 A AC to 600 A AC are connectable.
- High accuracy within +/-0.5 %
- Averaging calculation
- Maximum value / minimum value hold function
- Integrated scaling function
- Input signal monitoring with alarm output
- Peak current detection
- Integrated logging function

Specifications		Q68CT
Input points		8
Analog input (via CT sensor)		5/50/100/200/400/600 A AC
Input frequency		50/60 Hz
Excessive input		200 % for 1 minute, 150 % continuously
Digital output	Converted current value	0–10000 (12000)
	Scaling value	–32768–32767
Max. resolution		0–5 A AC : 0.5 mA 0–50 A AC : 5 mA 0–100 A AC : 10 mA 0–200 A AC : 20 mA 0–400 A AC : 40 mA 0–600 A AC : 60 mA
Overall accuracy		±0.5 %
Minimum sampling cycle		10 ms/8 channels
Response time		Max. 0.4 s
Insulation method		Between input terminals and power supply: transformer. Between input channels: no isolation
I/O points		16
External connection system		18-point removable terminal block with screws
Applicable wire size	mm ²	0.3–0.75
Internal power consumption (5 V DC)	mA	350
Weight	kg	0.19
Dimensions (WxHxD)	mm	27.4x98x112
Order information	Art. no.	145036

■ Loop Control Module

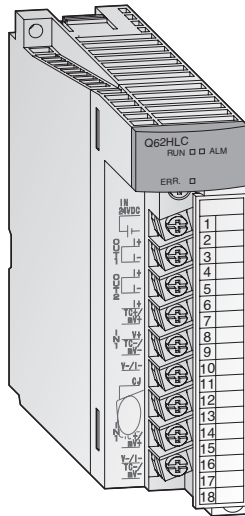

For fast response control


The Q62HLC loop control module uses a continuous proportional PID control format, which features a sampling period of 25 ms for high-accuracy, high-resolution thermocouple inputs, microvoltage inputs, voltage inputs, current inputs and current outputs. These features make the Q62HLC ideal for applications such as rapid temperature increase control, pressure control and flow rate control.

Special features:

- Staggering 25 ms sampling and control update time make the Q62HLC to one of the fastest control module in the market
- Supports sensor types, such as thermocouple, microvoltage, voltage and current input range
- Continuous proportional PID control by 4 to 20 mA current output results in highly stable and accurate control
- Control program profiles can be specified where set values and PID constants are automatically changed at specific times.
- Cascade control can be performed with channel 1 as the master and channel 2 as the slave.

Specifications		Q62HLC	
Number of input channels		2	
Analog input	Thermocouple	°C	-200--+2300 (0.1 °C resolution)
	Micro voltage	mV	-100--+100 (0.5-10 μV resolution)
	Voltage	V	-10--+10 (0.05-1 mV resolution)
	Current	mA	0-20 (0.8-1 μA resolution)
Digital output		-2000--+23000, -10000--+10000, -10000--+10000, 0-20000	
Supported thermocouples		K, J, T, S, R, N, E, B, PL II, W5re/W26Re	
Max. conversion speed		25 ms/2 channels	
Normal mode rejection ratio		60 dB or more (50/60 Hz)	
Common mode rejection ratio		120 dB or more (50/60 Hz)	
Input filter (primary delay digital filter)		0.0-100.0 s	
Sensor compensation value setting		-50.00-50.00 %	
Control method		Continuous proportional control	
PID constant range	PID constant setting	Setting possible by auto-tuning	
	Proportional band (P)	Thermocouple: 0.1 to full scale °C; micro voltage, voltage, current: 0.1-1000.0 %	
	Integral time (I)	s	0.0-3276.7
	Differential time (D)	s	0.0-3276.7
Set value setting range		Thermocouple: input range of thermocouple being used	
Dead band setting range		0.1-10.0 %	
I/O points		16	
Isolation		Transformer isolation between the input channels and between the inputs and ground	
Connection terminals		18-point removable terminal block with screws	
Applicable wire size		mm ²	0.3-0.75
External power supply		24 V DC, 70 m A	
Internal power consumption (5 V DC)		mA	270
Weight		kg	0.25
Dimensions (WxHxD)		mm	27.4x98x112
Order information		Art. no.	200693

High-Speed Counter Modules

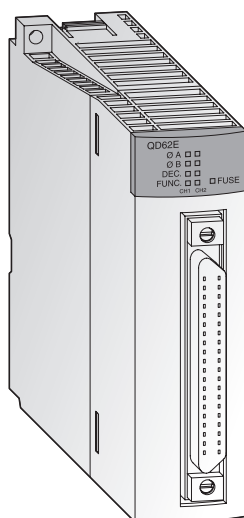

High-speed counter with automatic detection of rotation direction


These counter modules detect signals with a frequency which cannot be detected by normal input modules. For example, simple positioning tasks or frequency measurements can be realized.

Special features:

- Input for incremental shaft encoder with automatic forward and reverse detection
- Preset count via external signals or the PLC program with the aid of the PRESET function
- Ring counter function for counting up to a predefined value with automatic resetting to the starting value
- Functions such as speed measurement, definition of switching points or periodic counting are available.
- The modules QD62□ are provided with a 40-pin connector interface (for suitable connectors, please refer to the chapter "Accessories").
- The module QD60P8-G is provided with a removable terminal block fastened with screws.

Specifications	QD62E	QD62	QD62D	QD60P8-G	QD63P6
Counter inputs	2	2	2	8	6
Signal levels	5/12/24 V DC (2–5 mA)	5/12/24 V DC (2–5 mA)	5/12/24 V DC (2–5 mA) (RS422A)	5/12/24 V DC	5 V DC (6.4–11.5 mA)
Max. counting frequency	200 kHz	200	500 (differential)	30	200
Max. counting speed	1-phase-input	200 or 100	500 or 200	30	200,100 or 10
	2-phase-input	200 or 100	500 or 200	—	200,100 or 10
Counting range	32 bits + sign (binary), -2147483648– +2147483647	32 bits + sign (binary), -2147483648– +2147483647	32 bits + sign (binary), -2147483648– +2147483647	16 bits binary: 0–32767 32 bits binary: 0–99999999 32 bits binary: 0–2147483647	32 bits + sign (binary), -2147483648– +2147483647
Counter type	All modules are equipped with UP/DOWN preset counter and ring counter function.			Moving average function, alarm output and pre-scale function	UP/DOWN preset counter and ring counter function
Comparison range	32 bits + sign (binary)	32 bits + sign (binary)	32 bits + sign (binary)	32 bits + sign (binary)	32 bits + sign (binary)
External digital input points	Preset, function start				
	Nominal values	5/12/24 V DC (2–5 mA)	5/12/24 V DC (2–5 mA)	5/12/24 V DC (2–5 mA) (RS422A)	5/12/24 V DC
External digital output points (coincidence signal)	2 points/channel 12/24 V DC 0.1 A/point, 0.4 A/common (source)	2 points/channel 12/24 V DC 0.5 A/point, 2.0 A/common (sink)	2 points/channel 12/24 V DC 0.5 A/point, 2.0 A/common (sink)	—	—
I/O points	16	16	16	32	32
Connection terminal	40-pin connector at the front	40-pin connector at the front	40-pin connector at the front	18-point removable terminal block with screws	40-pin connector
Applicable wire size	0.3 mm ²	0.3	0.3	0.3–0.75	0.3
Internal power consumption (5 V DC)	330 mA	300	380	580	590
Weight	0.12 kg	0.11	0.12	0.17	0.15
Dimensions (WxHxD)	27.4x98x90 mm	27.4x98x90	27.4x98x90	27.4x98x90	27.4x98x90
Order information	Art. no. 128949	132579	132580	145038	213229
Accessories	40-pin connector and ready to use connection cables (refer to pages 57–58)				

■ Positioning Modules

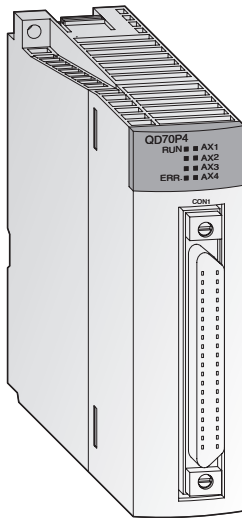

Multi-axis positioning


The modules are especially designed for systems including multiple axes that do not require any extensive control. The QD70P4 controls up to 4 axes and the QD70P8 up to 8 axes. Since any number of positioning modules can be used the number of axes to be controlled as well is unlimited.

Special features:

- Control of 4 or 8 axes by one module and more than 8 axes by using multiple modules
- Quick start of up to 8 axes simultaneously (0.1 ms per axis after start command from the CPU)
- Various positioning control systems are selectable.
- Easy parametrizing and positional data setup via optionally available positioning software GX Configurator-PT

Specifications		QD70P4	QD70P8
Number of control axes		4	8
Interpolation		—	
Points per axis		10 (by PLC program or with the positioning software GX Configurator PT)	
Output signal		Pulse chain	
Output frequency		kHz	1–200 000
Positioning method		PTP positioning; speed/locus positioning; path control	
Positioning	Units	Absolute data: -2 147 483 648–2 147 483 647 pulse Incremental method: -2 147 483 648–2 147 483 647 pulse Speed/position switching control: 0–2 147 483 647 pulse	
	Speed	0–200 000 pulse/s	
	Acceleration/ deceleration processing	Automatic, acceleration and deceleration step by step	
	Acceleration and deceleration time	0–32767 ms	
Pulse output type		Open collector output	
Max. servo motor cable length		m	2
I/O points		32	
Applicable wire size		0.3 mm ² (with connector A6CON1); AWG24 (with connector A6CON2)	
Internal power consumption (5 V DC)		mA	550
External power consumption (24 V DC)		mA	65
Weight		kg	0.15
Dimensions (WxHxD)		mm	27.4x98x90
Order information		Art. no.	138328
Accessories		40-pin connector and ready to use connection cables (refer to pages 57–58)	

■ Positioning Modules

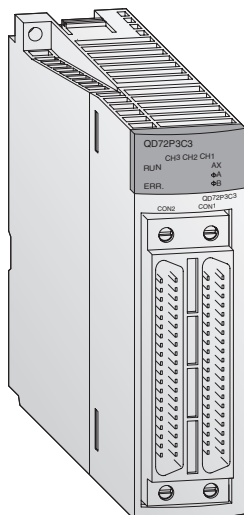

Space efficient positioning


The QD72P3C3 and QD73A1 realize positioning applications with less space requirements.

Special features:

- Minimized space requirement!
- The QD72P3C3 enables the positioning of 3 axes and has 3 integrated counter inputs
- QD73A1 with integrated D/A converter to control servo amplifiers with analog input
- Optimum solution for specific applications!
- Positioning can be controlled by confirming actual movement amount from encoder inputs.

Specifications		QD72P3C3	QD73A1
Number of control axes		3	1
Interpolation		—	—
Positioning	Data items	1 per axis	1
	Method	PTP control: absolute data and/or incremental	PTP control: absolute or incremental; speed/position swiching control: incremental
	Control range	-1073741824–1073741823 pulses	-2147483648–2147483647 pulses (32 bit signed binary)
	Speed	0–100 000 pulse/s	1–4000000 pulse/s
	Acceleration/ deceleration processing	Acceleration and deceleration step by step	Automatic, acceleration and deceleration step by step
	Acceleration and deceleration time	ms 1–5000	2–9999
	Start time	Positioning control, speed control: 1 ms	1.2 ms
	Pulse output method	Open collector output	Analog output (0–±10 V DC, adjustable to ±5–±10 V DC)
Counter function	Max. output pulse	kpps 100	—
	Number of channels	3	1
	Count input signal	1-phase input, 2-phase input; 5–24 V DC	2-phase input
	Counting speed	kpps 100	1000
	Counting range	31-bit signed binary (-1073741824–1073741823)	—
External connection		40-pin connector	15-pin and 9-pin connector
Internal power consumption (5 V DC)		A 0.57	0.52
I/O points		32	48
Weight		kg 0.15	0.2
Dimensions (WxHxD)		mm 27.4x98x90	55.2x98x90
Order information		Art. no. 213230	257759
Accessories		40-pin connector and ready to use connection cables (refer to pages 57–58)	

■ Positioning Modules

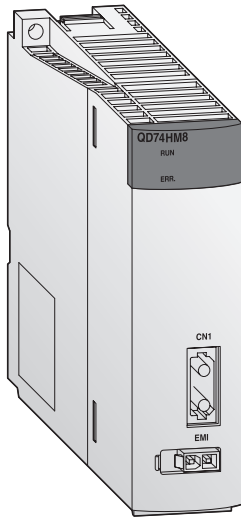

SSCNET positioning


The positioning modules QD74MH are used to control multiple axes via the high speed motion network SSCNETIII.

Special features:

- Eight and sixteen axes positioning modules are available.
- The operation cycle is 0.88 ms
- Easy positioning control functions
- A positioning operation starts up quickly taking as little as 0.88 ms.
- SSCNETIII makes the connection to the servo amplifier possible
- Easy application to the absolute position system

Specifications		QD74MH8	QD74MH16	
Number of control axes		8	16	
Interpolation		2 to 4 axes linear interpolation (up to 4 groups)		
Control methods		PTP control/locus control (linear only)		
Control units		Pulse		
Positioning data		32 data (positioning data no.1 to 32)/axis (by sequence program)		
Back-up		Basic parameters, OPR parameters, Manual control parameters, System parameters, Servo parameters and positioning parameters can be saved in the flash ROM. (Battery less)		
Positioning	Method	PTP control: incremental and/or absolute data; locus control: incremental and/or absolute data		
	Range	Absolute data: -2 147 483 648–2 147 483 647 pulse Incremental method: -2 147 483 648–2 147 483 647 pulse		
	Speed command range	5–2147000000 pulse/s		
	Acceleration/ deceleration processing	Linear, S-curve		
	Acceleration and deceleration time	ms	0–20000	
	Rapid stop deceleration time	ms	0–20000	
Number of SSCNET III systems		1		
Number of write accesses to flash ROM		Up to 100 000		
I/O points		32		
Internal power consumption (5 V DC)		A	0.7	
Weight		kg	0.15	
Dimensions (WxHxD)		mm	27.4x98x90	
Order information		Art. no.	218106	
			217994	
Accessories		SSCNETIII cable (MR-J3BUS□M(-A/-B))		

■ Positioning Modules

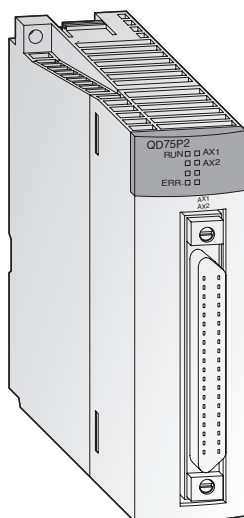

Positioning with an open control loop


The modules generate the travel command via a pulse chain. The speed is proportional to the pulse frequency and the distance travelled is proportional to the pulse length.

Special features:

- Control of up to three axes with linear interpolation (QD75P4) or circular interpolation (QD75P2, QD75P4)
- Storage of up to 600 positional data in the flash ROM (no back-up battery necessary)
- Units of travel can be defined in pulses, mm, inches or degrees.
- Configuration and presetting of all 600 positional data is performed via the PLC program or with the aid of the programming software GX Configurator QP. This software runs under Windows® 95/98 and Windows® 2000/NT.

Specifications		QD75P1	QD75P2	QD75P4
Number of control axes		1	2	4
Interpolation		—	2 axis linear and circular interpolation	2, 3, or 4 axis linear and 2 axis circular interpolation
Points per axis		600 pieces of data with PLC program, 100 pieces of data with GX Configurator QP		
Output type		Open collector	Open collector	Open collector
Output signal		Pulse chain	Pulse chain	Pulse chain
Output frequency	kHz	1–200	1–200	1–200
Positioning	Method	PTP control: absolute data and/or incremental; speed/position swiching control: incremental; locus/speed control: incremental; path control: absolute data and/or incremental		
	Units	Absolute data: -2 147 483 648 – 2 147 483 647 pulse -21 474 8364.8 – 214 748 364.7 μm -21 474.83648 – 21 474.83647 inch 0 – 359.99999 degree Inkremental method: -2 147 483 648 – 2 147 483 647 pulse -214 748 364.8 – 214 748 364.7 μm -21 474.83648 – 21 474.83647 inch -21 474.83648 – 21 474.83647 degree Speed/position switching control: 0 – 2 147 483 647 pulse 0 – 21 474 836.7 μm 0 – 21 474.83647 inch 0 – 21 474.83647 degree		
	Speed	1 – 1 000 000 pulse/s		
	Acceleration/ deceleration processing	0.01 – 20 000 000.00 mm/min 0.001 – 200 000.000 degree/min 0.001 – 200 000.000 inch/min		
	Acceleration and deceleration time	1–8388608 ms (4 patterns each can be set)		
	Rapid stop deceleration time	1–8388608 ms		
Max. length for servo motor cable	m	2	2	2
I/O points		32	32	32
Internal power consumption (5 V DC)	mA	400	460	580
Weight	kg	0.15	0.15	0.16
Dimensions (WxHxD)	mm	27.4x98x90	27.4x98x90	27.4x98x90
Order information	Art. no.	132581	132582	132583
Accessories		40-pin connector and ready to use connection cables (refer to pages 57–58); Programming software: GX Configurator QP, art. no.: 132219		

■ Positioning Modules

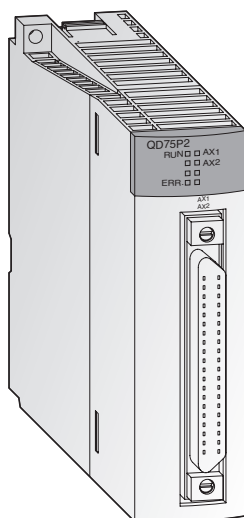

Long distance positioning

The modules of the QD75 series are suitable for bridging long distances between module and drive system.


The modules QD75D provide differential outputs, whereas the QD75M and QD75MH are designed for the operation across the motion network SSCNET.

Special features:

- Control of up to four axes with linear interpolation (QD75D4/QD75M4/QD75MH4) or two axes circular interpolation (all modules except QD75D1/QD75M1/QD75MH1)
- Storage of up to 600 positional data in the flash ROM (no back-up battery necessary)
- Units of travel can be defined in pulses, mm, inches or degrees.
- Configuration and presetting of all 600 positional data is performed via the PLC program or with the aid of the programming software GX Configurator QP.

Specifications	QD75D1	QD75M1	QD75D2	QD75M2	QD75D4	QD75M4
Number of control axes	1	1	2	2	4	4
Interpolation	—	—	2 axis linear and circular interpolation		2, 3, or 4 axis linear and 2 axis circular interpolation	
Points per axis	600 pieces of data with PLC program, 100 pieces of data with GX Configurator QP					
Output type	Differential driver	SSCNET	Differential driver	SSCNET	Differential driver	SSCNET
Output signal	Pulse chain	BUS	Pulse chain	BUS	Pulse chain	BUS
Output frequency	kHz	1–1000	1–1000	1–1000	1–1000	1–1000
Positioning	Method	PTP control: absolute data and/or incremental; speed/position switching control: incremental; locus/speed control: incremental; path control: absolute data and/or incremental				
	Units	Absolute data: -2 147 483 648 – 2 147 483 647 pulse -21 474 364.8 – 214 748 364.7 μm -21 474.83648 – 21 474.83647 inch 0 – 359.99999 degree Inkremental method: -2 147 483 648 – 2 147 483 647 pulse -214 748 364.8 – 214 748 364.7 μm -21 474.83648 – 21 474.83647 inch -21 474.83648 – 21 474.83647 degree				
	Speed	Speed/position switching control: 0 – 2 147 483 647 pulse 0 – 21 474 364.7 μm 0 – 21 474.83647 inch 0 – 21 474.83647 degree				
	Acceleration/deceleration processing	Automatic trapezoidal or S-pattern acceleration and deceleration or automatic S-pattern acceleration and deceleration				
	Acceleration and deceleration time	1–8388608 ms (4 patterns, each can be set)				
Rapid stop deceleration time	1–8388608 ms					
Max. length for servo motor cable	m	10	30	10	30	10
I/O points		32	32	32	32	32
Internal power consumption (5 V DC)	mA	520	520	560	560	820
Weight	kg	0.15	0.15	0.15	0.15	0.16
Dimensions (WxHxD)	mm	27.4x98x90	27.4x98x90	27.4x98x90	27.4x98x90	27.4x98x90
Order information	Art. no.	129675	142153	129676	142154	129677
Accessories		40-pin connector and ready to use connection cables (refer to pages 57–58); Programming software: GX Configurator QP, art. no.: 132219				

Interface Modules

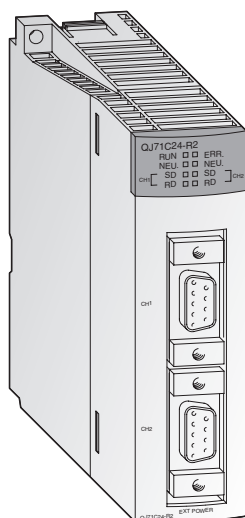

Data exchange with peripheral devices


This module enables communication with peripheral devices via a standard RS232 interface. The peripherals are connected point-to-point on a 1:1 basis.

Special features:

- The QJ71C24N provides one RS232 and one RS422/485 interface. The QJ71C24-R2 provides two RS232 interfaces and the QJ71C24N-R4 two RS422/485 interfaces.
- Enables PCs connected to the system to access the full data set of the MELSEC System Q CPU using graphic process supervision or monitoring software
- Integrated flash ROM memory for logging quality, productivity or alarm data that can be printed out when required
- Module and communications status shown by LEDs
- Communications test and monitor function are possible with the software GX-Configurator UT

Specifications		QJ71C24N	QJ71C24N-R2	QJ71C24N-R4	QJ71MB91
Interface	channel 1	RS232 (9-pin Sub-D)	RS232 (9-pin Sub-D)	RS422/RS485 (screw terminals)	RS232 (9-pin Sub-D)
	channel 2	RS422/RS485 (screw terminals)	RS232 (9-pin Sub-D)	RS422/RS485 (screw terminals)	RS422/RS485 (screw terminals)
Communications mode		Full duplex/half duplex	Full duplex/half duplex	Full duplex/half duplex	Full duplex/half duplex
Synchronisation		Asynchronous communications	Asynchronous communications	Asynchronous communications	Master/Slave
Data transfer	Rate	50–230400 (channel 1 only) 115200 (channel 1+2 simultaneously)	50–230400 (channel 1 only) 115200 (channel 1+2 simultaneously)	50–230400 (channel 1 only) 115200 (channel 1+2 simultaneously)	300–115200
	Distance RS232	15 m	15 m	—	15 m
	Distance RS422/485	1200 (if both channels are used)	—	1200 (if both channels are used)	1200
Netzwerk Konfiguratin		RS232: 1:1 RS485: 1:1; 1:n;n: 1; m:m	1:1	RS232: 1:1 RS485: 1:1; 1:n;n: 1; m:m	Master (32 slaves) Slave (242)
Data format		1 start bit, 7 or 8 data bits, 1 or 0 parity bits, 1 or 2 stop bits	1 start bit, 7 or 8 data bits, 1 or 0 parity bits, 1 or 2 stop bits	1 start bit, 7 or 8 data bits, 1 or 0 parity bits, 1 or 2 stop bits	Modbus RTU
Error correction		Parity check, checksum	Parity check, checksum	Parity check, checksum	—
DTR/DSR control		YES/NO selectable	YES/NO selectable	—	—
X ON/X OFF (DC1/DC3)		YES/NO selectable	YES/NO selectable	YES/NO selectable	—
I/O points		32	32	32	32
Internal power consumption (5 V DC)		310 mA	260 mA	390 mA	310 mA
Weight		0.2 kg	0.2 kg	0.2 kg	0.2 kg
Dimensions (WxHxD)		27.4x98x90 mm	27.4x98x90 mm	27.4x98x90 mm	27.4x98x90 mm
Order information		Art. no. 149500	149501	149502	167757

■ High-Speed Communication Modules

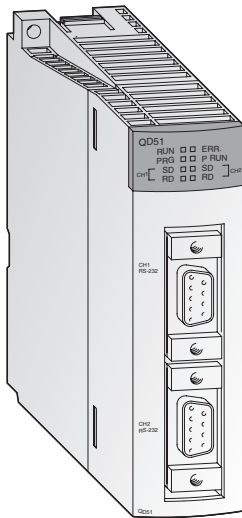

Programmable interface module

This module works through its own program independently of the PLC CPU. Thus, peripherals can be operated or mathematical operations performed without imposing an additional load on the PLC CPU. Programming is in AD51H-BASIC.

Special features:

- Two RS232C interfaces and one RS422/485 interface
- Two BASIC programs can be operated in parallel (multitasking).
- The tasks can be stored in the module as interpreter programs or in compiled form.
- The integrated Flash ROM is used for storage.
- Online and offline program creation is possible.
- The module and communication status is indicated by means of LEDs.
- Support for plain ASCII data exchange with connected devices such as barcode readers, scales and identification systems

Specifications			QD51-R24	QD51
Interfaces			1 x RS422/485, 1 x RS232	2 x RS232
Microprocessor			V53A (20 MHz)	V53A (20 MHz)
Number of parallel tasks			Max. 2	Max. 2
Start conditions for tasks			Started by power on, started by the start command from another task, start by an interruption from the PC CPU.	
Data transfer	Rate	bit/s	≤38400	≤38400
	Distance	m	500 (RS422/485), 15 (RS232C)	15 (RS232C)
Program language			AD51H-BASIC	AD51H-BASIC
Internal memory	Program memory	kbyte	64 x 1 task or 32 x 2 tasks	64 x 1 task or 32 x 2 tasks
	Common memory or tasks	kbyte	8	8
	Data buffer to PLC	kbyte	6	6
	Extension relays		1024	1024
	Extension data registers		1024 (2 kbyte)	1024 (2 kbyte)
Memory backup capability			Provided for common memory, extension relay and extension register.	Provided for common memory, extension relay and extension register.
Memory for programs			Flash memory: 64 kbyte	Flash memory: 64 kbyte
I/O points			32 (1 slot)	32 (1 slot)
Internal power consumption (5 V DC)			mA 310	260
Weight			kg 0.2	0.2
Dimensions (WxHxD)			mm 27.4x98x90	27.4x98x90
Order information			Art. no. 136385	136384
Accessories			For both modules: programming software for PC/AT (MS-DOS): SW11X-AD51HPE, art. no.: 33102	

Network Modules

From simple stand alone systems and basic AS-Interface networks to Ethernet based networks and even Global networks based on Remote Telemetry Technology, Mitsubishi Electric provides a wide range of network solutions.

Ethernet Modules

Module	Specifications	Art. no.
QJ71E71-100	10BASE-T/100BASE-TX	138327
QJ71E71-B2	10BASE2	129614
QJ71E71-B5	10BASE5	147287

MELSECNET/H Modules

MASTER

Module	Specifications	Art. no.
QJ71LP21-25	Fiber optic cable, dual loop, 25 Mbps/10 Mbps	136391
QJ71LP21S-25	Fiber optic cable, dual loop, 25 Mbps/10 Mbps, With external power supply function	147632
QJ71LP21G	GI-50/125 fiber optic cable, dual loop, 10 Mbps	138958
QJ71LP21GE	GI-62.5/125 fiber optic cable, dual loop, 10 Mbps	138959
QJ71BR11	Coaxial cable, single bus, 10 Mbps	127592

REMOTE I/O

QJ72LP25-25	Fiber optic cable, dual loop, 25 Mbps/10 Mbps	136392
QJ72LP25G	GI-50/125 fiber optic cable, dual loop, 10 Mbps	138960
QJ72LP25GE	GI-62.5/125 fiber optic cable, dual loop, 10 Mbps	138961
QJ72BR15	Coaxial cable, single bus, 10 Mbps	136393

PC I/F BOARD (PCI BUS)

Q80BD-J71LP21-25	Fiber optic cable, dual loop, 25 Mbps/10 Mbps	136367
Q80BD-J71LP21G	GI-50/125 fiber optic cable, dual loop, 10 Mbps	138962
Q80BD-J71LP21GE	GI-62.5/125 fiber optic cable, dual loop, 10 Mbps	138963
Q80BD-J71BR11	Coaxial cable, single bus, 10 Mbps	136366

CC-Link Modules

MASTER/LOCAL

Module	Specifications	Art. no.
QJ61BT11N	CC-Link Ver. 2 compatible	154748
QSOJ61BT12	Master module for CC-Link Safety	203209

MASTER/LOCAL INTERFACE BOARD (PCI BUS)

Q80BD-J61BT11N	CC-Link Ver. 2 compatible	200758
----------------	---------------------------	--------

CC-Link IE Modules

Module	Specifications	Art. no.
QJ71GP21-SX	1 Gbps, master/slave module for FO GI	208815
QJ71GP21S-SX	1 Gbps, master/slave module for FO GI with external voltage supply	208816

MASTER/LOCAL INTERFACE BOARD (PCI BUS)

Q80BD-J71GP21-SX	1 Gbps, PCI PC card, master/slave for FO GI	208817
Q80BD-J71GP21S-SX	1 Gbps, PCI PC card, master/slave for FO GI with external voltage supply	208818

CC-Link IE Field Modules

Module	Specifications	Art. no.
QJ71GF11-T2	CC-Link IE Field master/local module	236484
QSOJ71GF11-T2	CC-Link IE Field master/local module	245177

MASTER/LOCAL INTERFACE BOARD (PCI BUS)

Q81BD-J71GF11-T2	CC-Link IE Field PCI PC card, master/local module	253008
------------------	---	--------

Below you can find an overview on the currently available network modules. For more detailed informations please contact your nearest Mitsubishi Electric distributor or the branch in your country.

Profibus DP Modules

Module	Specifications	Art. no.
QJ71PB92V	Interface master module (DP V1/V2)	165374
QJ71PB93D	Intelligent slave	143545

Profinet Module

Module	Specifications	Art. no.
ME1PN1FW-CCPU	Profinet master module	252935

DeviceNet Module

Module	Specifications	Art. no.
QJ71DN91	Interface master/slave module	136390

AS-Interface Module

Module	Specifications	Art. no.
QJ71AS92	AS-i Standard Version 2.11, dual network master	143531

Modbus Modules

Module	Specifications	Art. no.
QJ71MB91	Serial Modbus interface master/slave module	167757
QJ71MT91	Modbus/TCP interface master/slave module for Ethernet	155603

Web Server Module

Module	Specifications	Art. no.
QJ71WS96	10BASE-T/100BASE-TX	147115

■ Web Server Module



Access to the MELSEC System Q via the Internet


The web server module QJ71WS96 enables remote monitoring and maintenance of a MELSEC System Q PLC system via the Internet.

Special features:

- Very easy setting functions integrated
- User needs only a Web browser for setting and monitoring.
- RS232 interface for modem connection
- Various connections for data exchange are possible:
- ADSL, modem, LAN, etc.
- Sending and receiving data via mail or FTP
- Integration of a self-designed web site and Java applets is possible
- Standard connection via Ethernet to exchange data between other PLCs or PCs
- Events and CPU data protocol, storage functions

Specifications		QJ71WS96
Module type		Web server, FTP server/client
Transmission method		Ethernet: CSMA/CD
Interface	type	10BASE-T/100BASE-TX (mode is recognized automatically)
Communications speed	Mbps	10BASE-T: 10 Mbps/100BASE-TX: 100 Mbps
Max. segment length	m	100 (between hub and node)
RS232C communications data	Interface	RS232C, 9-pin D-SUB
	Transfer type	Duplex
	Synchronisations method	Start/stop synchronisation
	Transfer speed	Mbps 9.6/19.2/38.4/57.6/115.2
	Transmission distance	m Max. 15
	Data format	1 start bit, 8 data bits, 1 stop bit
	Transfer control	Floating control is possible (RS/CS)
Memory capacity	MB	5 (Standard-ROM); expandable with CompactFlash Card up to 512
I/O points		32
Internal power consumption (5 V DC)	mA	650
Weight	kg	0.17
Dimensions (WxHxD)	mm	27.5x98x90
Order information	Art. no.	147115

■ MES Interface Module

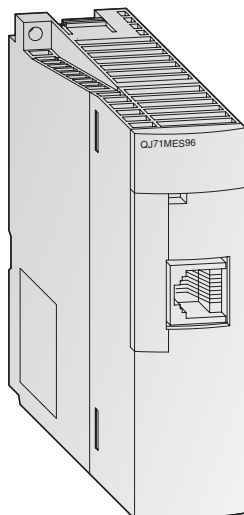

Direct connection from the shop floor to the MES databases


The new MELSEC Q series MES module allows users to interface their production control systems directly to an MES database. (MES: Manufacturing Execution System).

Special features:

- It removes the need for an interfacing PC layer – reducing hardware costs and installation time.
- It removes the need for specialist interfacing software run on the PC layer; saving on expensive software and services while reducing installation costs.
- It simplifies the MES architecture reducing the total commissioning time.
- It can improve reliability and accessibility as the module is based on industrial PLC design standards.
- The simplified system provides greater direct data visibility increasing the opportunity to achieve higher productivity.

Specifications		QJ71MES96
Module type		MES interface module
Transmission method		Ethernet
Interface	type	10BASE-T/100BASE-TX
Data base interface function	Common	Interacts with databases via user-defined jobs
	Tag function	Collects device data of the PLC CPUs on the network in units of tags
	Trigger monitoring function	Monitors the status of conditions (time, tag, values etc.) that initiate jobs
	Trigger buffering function	The MES interface module buffers the data and trigger time to internal memory
	SQL text transmission	Automatically generates the correct SQL message according to requirements of each supported database type.
	Arithmetic processing	Formulas can be applied to data before sending from the MES interface module.
	Program execution	Executes programs in the application server computer at the beginning and end of a job.
Software functions	No. of connected databases	32 items/project max.
	Supported databases	Oracle® 8i, Oracle® 9i, Oracle® 10g, Microsoft® SQL Server 2000, Microsoft® SQL Server 2000 Desktop Engine (MSDE2000), Microsoft® Access 2000, Microsoft® Access 2003
	No. of data settings	64 items/project max. (256 components/tag, 4096 components/project)
Memory capacity		1 CompactFlash card can be installed
I/O points		32
Internal power consumption (5 V DC)	mA	650
Weight	kg	0.16
Dimensions (WxHxD)	mm	27.5x98x90
Order information	Art. no.	200698

■ High-Speed Data Logger Module

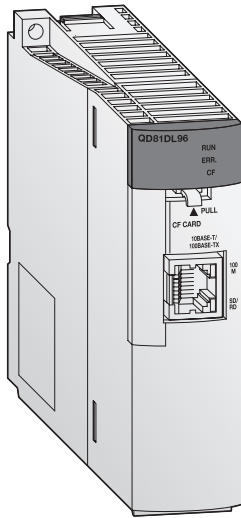

Easy data logging

The high-speed data logger module can log programmable controller devices without using a personal computer.

By easily configuring the module, sampled data can be saved in the optimal file format to a CompactFlash card.


Special features:

- Trigger logging function for accelerated problem analysis
- Data can be saved in list or report format to a CompactFlash Card
- Equipment error detection and failure prediction
- A single QD81DL96 module can access up to a maximum of 64 PLC CPUs

Specifications		QD81DL96
Ethernet	Interface ^①	10BASE-T/100BASE-TX
	Data transmission rate	10BASE-T: 10 Mbps/100BASE-TX: 100 Mbps
	Transmission method	Base band
	No. of cascaded stages	10BASE-T: max. 4/100BASE-TX: max. 2
	Max. segment length ^②	m 100
	Supported function	Auto-negotiation function supported (automatically distinguishes 10BASE-T/100BASE-TX)
CompactFlash card	Supply power voltage	3.3 V ±5 %
	Supply power capacity	mA Max. 150
	Card size	TYPE I card
	No. of installable cards	1
I/O points		32
Clock		Obtained from a programmable controller CPU (in multiple CPU system, CPU No. 1) or SNTP server Time accuracy after obtaining the time is a daily variation of ±9.504 seconds ^③
Internal power consumption (5 V DC)	A	0.46
Weight	kg	0.15
Dimensions (WxHxD)	mm	27.4x98x90
Order information	Art. no.	221934

① The high speed data logger module distinguishes 10BASE-T from 100BASE-TX according to the external device. For connection to a hub without an auto-negotiation function, set the hub to half-duplex communications mode.
 ② Distance between a hub and node.
 ③ For programmable controller CPU, everyday (once in 24 hours); for SNTP server, re-obtains the time at the user specified interval.

Multi-Function Counter/Timer Module

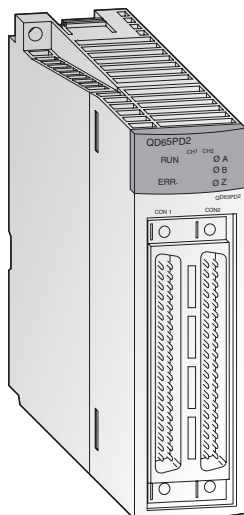

High-speed counter/timer module with cam switch function


Due to its high-speed counter inputs, PWM outputs for control DC drives and the integrated cam switching function, the QD65PD2 is well suited for high precision positioning tasks.

Special features:

- Max. counting speed up to 8 MHz
- Pulse measurement function with a resolution of 100 ns
- Precisely control PWM output up to 200 kHz
- The integrated cam switch function reduces the programming effort
- Integrated digital I/Os
- Connection via two 40-pin plug-in connectors with screws

Specifications		QD65PD2
Counter inputs		2
Signal levels	DC input	5/12/24 V DC (7–10 mA)
	Differential input	Conforms to RS422A
Max. counting frequency	DC input	200 kHz
	Differential input	8000 kHz
Counting range		32 bits + sign (binary), -2147483648–+2147483647
External digital input points		6 phase Z inputs; function start and preset count 6 general purpose inputs
External digital output points		8 coincidence outputs, which are activated by comparison of the count value with the user range 8 general purpose outputs
Cam switch	Integrated outputs	8
	Program cycle period	1 ms
PWM outputs	Output frequency	DC to 200 kHz
	Duty ratio	Any ratio can be set (resolution: 0.1 μs)
Dimensions (WxHxD)	mm	27.4x98x90
Order information	Art. no.	245113

Interrupt Module and High-Speed Inputs

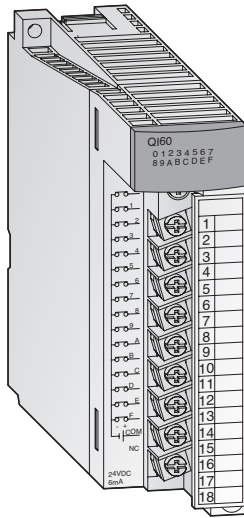

Branching to subroutines

The interrupt module QI60 is suitable for applications demanding quick responses.

Special features:

- Every input in this module is assigned to a pointer which serves as a branch mark for a subroutine.
- If an interrupt/alarm signal is applied at an input, the PLC program is interrupted after it has worked through the current statement and a subroutine assigned to the input is first processed.
- Galvanic isolation between process and controller by means of a photocoupler is a standard feature
- Only one QI60 can be installed per PLC system

High-speed input modules

- Fast response times, 5 μs–1 ms adjustable
- Input voltage 24 V and 5 V
- Can be configured as interrupt or input modul

Specifications	QI60	QX40H	QX70H	QX80H	QX90H	
Input points	16	16	16	16	16	
Rated input voltage	V DC 24 (sink type)	24	5	24	5	
Operating voltage range	V DC 20.4–28.8	20.4–28.8	4.25–6	20.4–28.8	4.25–6	
Max. input points simultaneous ON	100 %	100 %*	100 %	100 %*	100 %	
Input	Resistance	kΩ	Approx. 3.9	approx. 470 W	approx. 3.9	approx. 470 W
	Current	mA	Approx. DC 4/8	approx. DC 6	approx. DC 6	approx. DC 6
ON	Voltage	V	≥DC 19	≥DC 3.5	≥DC 13	≥DC 3.5
	Current	mA	≥DC 4	≥DC 3	≥DC 3	≥DC 3
OFF	Voltage	V	≤DC 11	≤DC 1	≤DC 8	≤DC 1
	Current	mA	≤DC 1.7	≤DC 1.6	≤DC 1	≤DC 1
Response time	OFF → ON	ms	≤0.2	0.04–0.95 (adjustable)	0.04–0.95 (adjustable)	0.04–0.95 (adjustable)
	ON → OFF	ms	≤0.3	0.04–0.95 (adjustable)	0.04–0.95 (adjustable)	0.04–0.95 (adjustable)
Status display of inputs	LED	LED	LED	LED	LED	
Insulation method	All modules are fitted with photocoupler isolation between input terminals and internal circuit.					
I/O points	16	16	16	16	16	
Connection terminal	The module is fitted with a terminal block with 18 screw terminals.					
Applicable wire size	mm ²	0.3–0.75	0.3–0.75	0.3–0.75	0.3–0.75	
Internal power consumption (5 V DC)	mA	60 (all points ON)	80 (all points ON)	80 (all points ON)	80 (all points ON)	
Weight	kg	0.20	0.16	0.16	0.16	
Dimensions (WxHxD)	mm	27.4x98x90	27.4x98x90	27.4x98x90	27.4x98x90	
Order information	Art. no.	136395	221844	221855	221856	221857

■ Dummy Module



Place keeper and mechanical protection


The dummy module QG60 protects unused slots on the base unit from dust and reserve I/O addresses.

Special features:

- Tough protection of unused slot
- Unified front view

Specifications	QG60
I/O points	0–1024 (selectable)
Application	Used to protect any vacant slot from dust.
Current consumption	mA —
Weight	kg 0.07
Dimensions (WxHxD)	mm 27.4x98x90
Order information	Art. no. 129853

■ ERNT – Conversion adapters

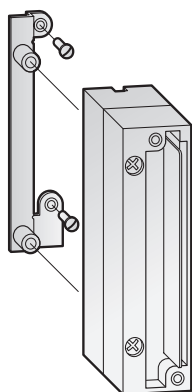

AnS series adapters -> MELSEC System Q

These adapters enable a PLC of the MELSEC AnS series to be easily replaced by a MELSEC System Q PLC.


The terminal block adapters enable existing wiring for modules of the MELSEC AnS series to be connected to MELSEC System Q modules. The mounting adapters enable a MELSEC System Q base unit to be fitted using the existing fixing holes of the MELSEC AnS series.

Special features:

- No changes to wiring when replacing the PLC
- Time savings and fewer error sources
- Using the existing fixing holes avoids mechanical work in the electrical cabinet.

Item	Application	Art. no.
ERNT-ASQTX10	Terminal block A1SX10/A1SY10 to QX10/QY10	249093
ERNT-ASQTX40	Terminal block A1SX40(-S1/S2) to QX40(-S1)	249094
ERNT-ASQTX80	Terminal block A1SX80(-S1/S2) to QX80	249135
ERNT-ASQTY22	Terminal block A1SY22 to QY22	249136
ERNT-ASQTY40	Terminal block A1SY40(P) to QY40P	249137
ERNT-ASQTY50	Terminal block A1SY50 to QY50	249138
ERNT-ASQTY80	Terminal block A1SY80 to QY80	249139
ERNT-ASQT64AD	Terminal block A1S64AD to Q64AD	249140
ERNT-ASQT68AD	Terminal block A1S68AD to Q68AD(V/I)	249141
ERNT-ASQT62DA	Terminal block A1S62DA to Q62DAN	249142
ERNT-ASQT68DA	Terminal block A1S68DA(V/I) to Q68DA(V/I)N	249143
ERNT-ASQB38	Base unit A1S38(H)B to Q38B	249144
ERNT-ASQB35	Base unit A1S35B to Q35B	249145
ERNT-ASQB33	Base unit A1S33B to Q33B	249146
ERNT-ASQB00J	Base unit A1S1(H)CPU(-S3) to Q00(U)JCPU	249147
ERNT-ASQB68	Base unit A1S68B to Q68B	249148
ERNT-ASQB65	Base unit A1S65B to Q65B	249149
ERNT-ASQB55	Base unit A1S55B to Q55B	249150

■ Connection Cables

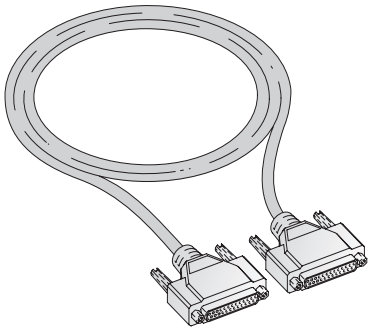


Connection cable for extension units

These connection cables are used for connecting base units to the extension units. They have been cut to the correct length for each application.

When the extension cables are used multiple, the overall distance of the cables should be within 13.2 m.

Specifications	QC05B	QC06B	QC12B	QC30B	QC50B	QC100B	
For extension base units	Q52B, Q55B	Q63B, Q65B, Q68B, Q612B	Q63B, Q65B, Q68B, Q612B	Q63B, Q65B, Q68B, Q612B	Q63B, Q65B, Q68B, Q612B	Q63B, Q65B, Q68B, Q612B	
Length	m	0.45	0.6	1.2	3.0	5.0	10.0
Order information	Art. no.	140380	129591	129642	129643	129644	129645

■ Tracking Cables

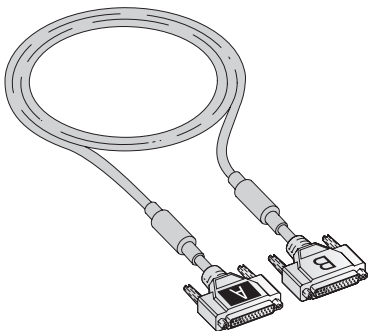

Connection cable for redundant CPUs

The tracking cable connects the two CPUs in a redundant system. Use only the QC10TR or QC30TR cables!


When both systems are started at the same time System A will be the active controller and System B will be the standby system.

The connectors of the tracking cables are labelled A and B for System A and System B.

The length of the extension cables cannot exceed 13.2 metre

Specifications	QC10TR	QC30TR	
Purpose	Connection of the two CPU modules in a redundant system (QnPRHCPU)		
Length	m	1.0 m	3.0 m
Order information	Art. no.	157068	157069

■ Programming Cables

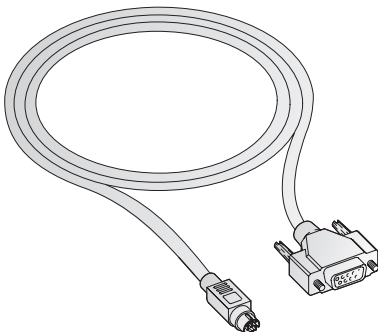

Programming cable for USB and RS232 interface


The QC30R2 and QC30-USB cables are used for programming a MELSEC System Q CPU via the RS-232 and standard USB ports.

The programming cable provides a 9-pin D-sub connector for the PC side and a 6-pin Mini-DIN connector for the PLC interface.

The USB cable is especially suited for a fast connection between PC and CPU.

Specifications	QC30R2	QC30-USB	USB-CAB-5M	
Connection cable for	Connection between a PCs and a MELSEC System Q PLC via RS232 interface	Connection of a PC to a MELSEC System Q CPU via a standard USB port	Connection of a PC to an iQ CPU in the MELSEC System Q via a mini-USB port	
Length	m	3.0	3.0	5.0
Order information	Art. no.	128424	136577	221540
Accessories	Connector disconnection prevention holder Q6HLD-R2	—	—	

■ Connector Disconnection Prevention Holder




Disconnection prevention for RS232 cable

The connector disconnection prevention holder Q6HLD-R2 securely locks the RS232 connector of the programming cable to

the CPU and prevents the connector from accidentally loosening (e.g. when connected to an HMI operator terminal).

Specifications		Q6HLD-R2
Application		Programming cable QC30R2
Order information	Art. no.	140381

■ Adapter Cables




Assembled cable with D-SUB plug

The cables Q32CBL-3m and Q32CBL-5M are used for connecting the modules QX81 and QY81P of the MELSEC Q.

Specifications		Q32CBL-3M	Q32CBL-5M	Q32CBL-10M
Connection cable for	type	QX81/QY81P	QX81/QY81P	QX81/QY81P
Length	m	3.0	5.0	10.0
Order information	Art. no.	136575	136576	158066

■ 40-Pin Connectors

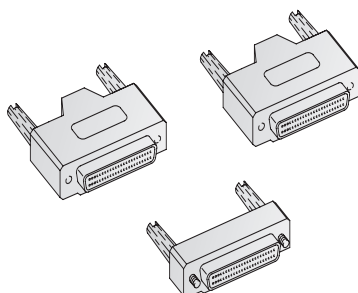

Connectors A6CON


The 40-pin connectors are available in four different connection versions that differ in the way the leads are connected.

These connectors are required for all modules that connect to external signals via a 40-pin plug connection.

Whilst for the connectors A6CON-1 to A6CON-3 the cable is attached straight into the connector, in the case of the A6CON-4 the lead is angled.

Specifications		A6CON-2	A6CON-3	A6CON-4
Connector		Crimp-contact type	Pressure displacement type	Soldering type
Applicable wire size	mm ²	0.3	0.3	0.3
Order information	Art. no.	134140	134141	146923

■ Connection Cables with Connectors



Assembled cables


The cables Q40CBL-3M and Q40CBL-5M serve as connecting cables for I/O modules with 40-pin plug connection.

The cables are prefabricated, i.e. a 40-pin connector is already attached to one cable end.

The cables FA-CBLQ75M□□ are ready made cables for the connection of the positioning modules QD75D1/D2/D4 or QD75P1/P2/P4 to a Mitsubishi Electric servo amplifier MR-J2-Super or MR-C .

Specifications	Q40CBL-3M	Q40CBL-5M	Q40CBL-10M	FA-CBLQ75M2J2-P	FA-CBLQ75M2C-P	FA-CBLQ75PM2J2	FA-CBLQ75PM2C	
Application range	All MELSEC System Q modules with 40-pin connectors, like e.g. QX71, QX72, QY41P, QY42P, QX82(-S1)			QD75D1/D2/D4 for connection with MELSERVO MR-J2-S	QD75D1/D2/D4 for connection with MELSERVO MR-C	QD75P1/P2/P4 for connection with MELSERVO MR-J2-S	QD75P1/P2/P4 for connection with MELSERVO MR-C	
Length	m	3.0	5.0	10.0	2.0	2.0	2.0	
Order information	Art. no.	140991	140997	158068	147697	147698	147699	147700

■ Memory Cards




MELSEC System Q memory cards

All MELSEC System Q CPUs have a permanently installed RAM. This memory can be extended with a variety of external memory cards.

Specifications	Q2MEM-1MBS	Q2MEM-2MBS	Q2MEM-2MBF	Q2MEM-4MBF	Q2MEM-8MBA	Q2MEM-16MBA	Q2MEM-32MBA	
Memory type	SRAM	SRAM	Flash	Flash	ATA	ATA	ATA	
Memory capacity	1 MB	2 MB	2 MB	4 MB	8 MB	16 MB	32 MB	
Order information	Art. no.	127627	145399	127591	129646	129647	129648	129649

Specifications	Q3MEM-4MBS	Q3MEM-4MBS-SET	Q3MEM-8MBS	Q3MEM-8MBS-SET	
Memory type	SRAM	SRAM	SRAM	SRAM	
Memory capacity	4 MB	4 MB	8 MB	8 MB	
Order information	Art. no.	217621	217622	217623	217624

■ PCMCIA Adapter Unit

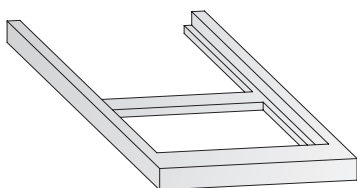

Buffer battery

The lithium battery Q6BAT is the replacement for the battery integrated for data backup in any MELSEC System Q CPU.

Specifications	Q2MEM-ADP	
For memory cards type	All MELSEC Q memory cards	
Order information	Art. no.	129650

Battery Q2MEM-BAT




Memory card buffer battery

The lithium battery Q2MEM-BAT is a replacement battery for the SRAM memory card Q2MEM-1MBS.

Specifications		Q2MEM-BAT
For memory card	type	Q2MEM-1MBS and Q2MEM-2MBS
	V DC	3.0
Capacity	mA h	48
Order information		Art. no. 129854

Battery Q6BAT




Buffer battery

The lithium battery Q6BAT is the replacement for the battery integrated for data backup in any MELSEC System Q CPU.

Specifications		Q6BAT
Voltage	V DC	3.0
Capacity	mA h	1800
Dimensions (Ø x H)	mm	Ø16x30
Order information		Art. no. 130376

Wireless LAN Adapter

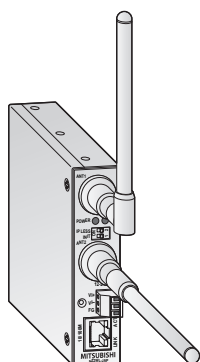


Wireless connection to networks

With the wireless LAN adapter NZ2WL-EU, a PLC system can be wirelessly connected to a network (LAN). This shortens the configuration and connection process at end-user

facilities. The adapter complies to directives IEEE 802.11 a / b / g and can be configured as an access point or station.

Specifications		NZ2WL-EU
Wired LAN	Communications speed	10/100 Mbit/s
	Communications mode	Half duplex/full duplex
	Number of interfaces	1 (10BASE-T/100BASE-TX)
1 (10BASE-T/100BASE-TX)	Transmission method	Conforms to IEEE802.11 a/b/c
	Communications speed	1–54 Mbit/s
External power consumption	Voltage	12–24 V DC
	Current	Max. 0.4 A at 12 V DC, max. 0.2 A at 24 V DC
Dimensions (without aerial) (WxHxD)	mm	25x97x68
Weight	kg	0.25
Order information		Art. no. 249090

■ DIN Rail Mounting Adapter

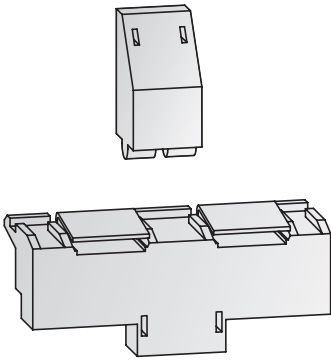


Adapter for mounting a MELSEC System Q on a DIN rail

The mounting adapter is used for easy and quick mounting the MELSEC System Q base units on a DIN rail.

Specifications	Q6DIN1	Q6DIN2	Q6DIN3
For base units	Q38B/Q312B/Q68B/Q612B	Q35B/Q65B	Q33B/Q63B
Dimensions (WxH)	mm 328x98	245x98	198x98
Order information	Art. no. 129673	129674	136368

■ Interchangeable Terminal Blocks for I/O Modules



Terminal blocks for screw-less wiring

As an alternative to the standard screw terminal blocks for the input/output modules, there are three different screw-less terminal blocks available.


The spring clamp terminal blocks Q6TE-18S and Q6TE-18SN permit the connection of single or multi-ple-wire copper conductors, whereby the stripped cable ends are pressed

vertically into the terminal and are held by a traction spring.

In the case of the Q6TA32 terminal block, contact is made by pressing in the wire with the optional insertion tool without having to strip the wire first. This allows for rapid wiring of the terminals.


Specifications	Q6TE-18S	Q6TE-18SN	Q6TA32
Type	Spring clamp terminal block	Spring clamp terminal block	IDC terminal block adapter
Applicable modules	All MELSEC System Q modules with terminal block for 18 screw terminals		QX41, QX71, QY41P, QY71
Applicable wire size	mm ² 0.3–1.5	0.3–1.5	0.5
Weight	kg 0.07	0.07	0.08
Order information	Art. no. 141646	249089	145034
Accessories	—	—	Insertion tool Q6TA32TOL, art. no.: 145035

■ Base Units

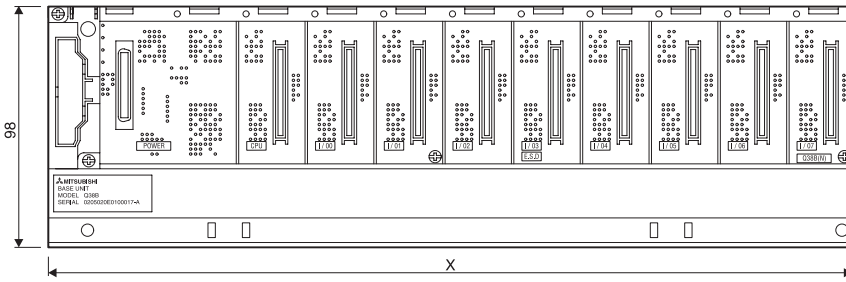


Type	X (in mm)
Q32SB	114
Q33B	189
Q33SB	142
Q35B/Q35DB	245
Q35SB	197.5
Q38B/Q38DB	328
Q312B/Q312DB	439
Q52B	106
Q55B	189
Q63B	189
Q66B	245
Q68B	328
Q612B	439

■ Base Units (with redundant power supply)

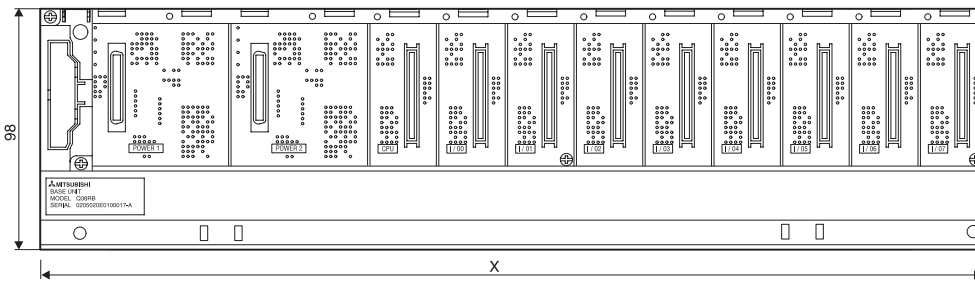


Type	X (in mm)
Q38RB	439
Q68RB	439
Q65WRB	439

■ CPUs and Power Supply Modules

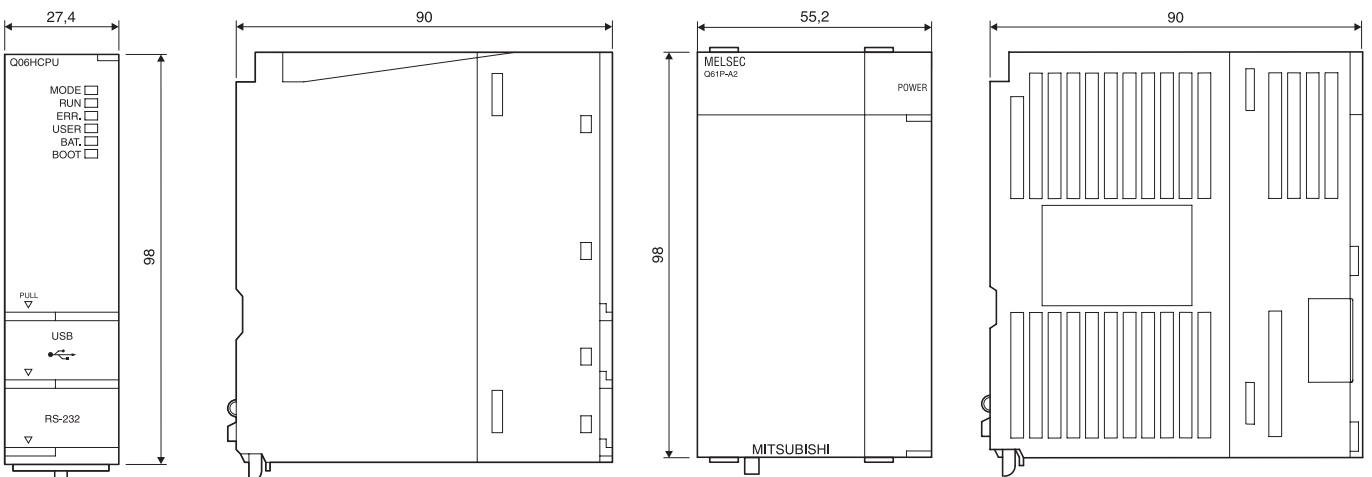

Unit: mm

■ Safety Main Base Unit

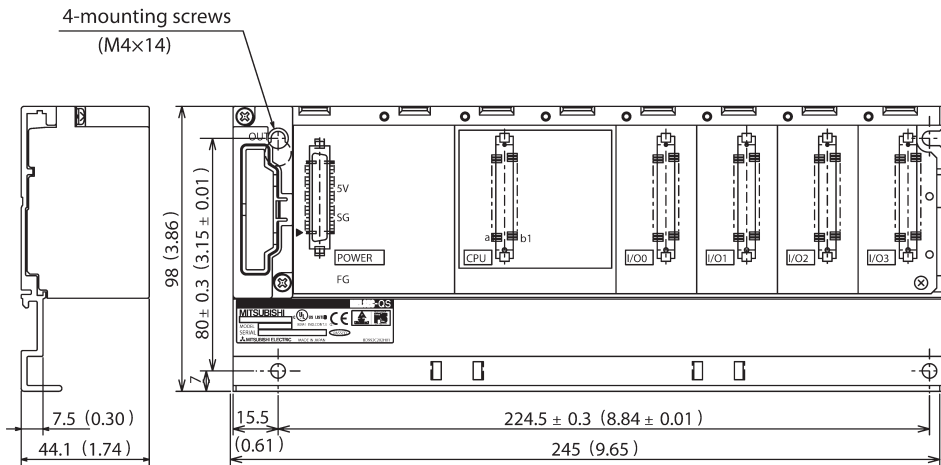


Type	X (in mm)
QS034B-E	245

Unit: mm

5



■ Safety CPU and Power Supply Module

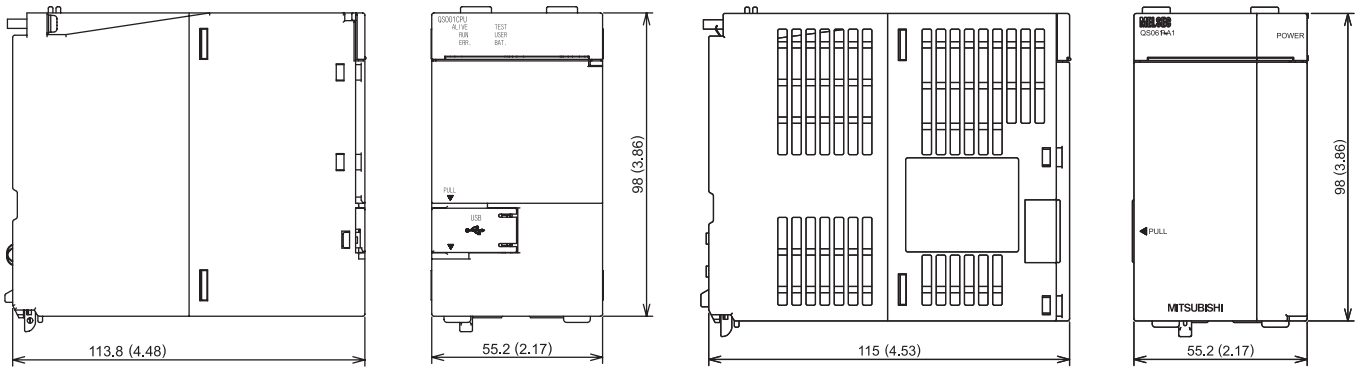

Unit: mm


DIMENSIONS MELSEC SYSTEM Q

■ CPUs and Power Supply Modules (redundant)

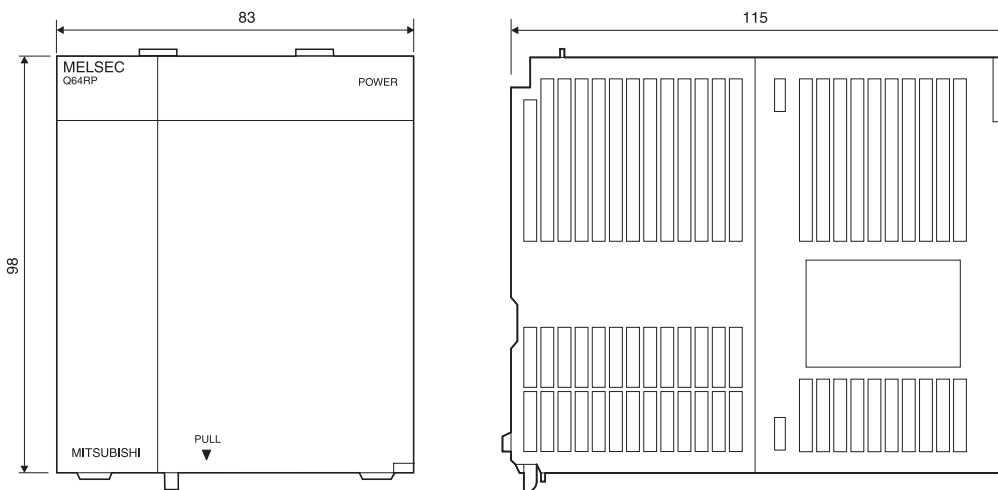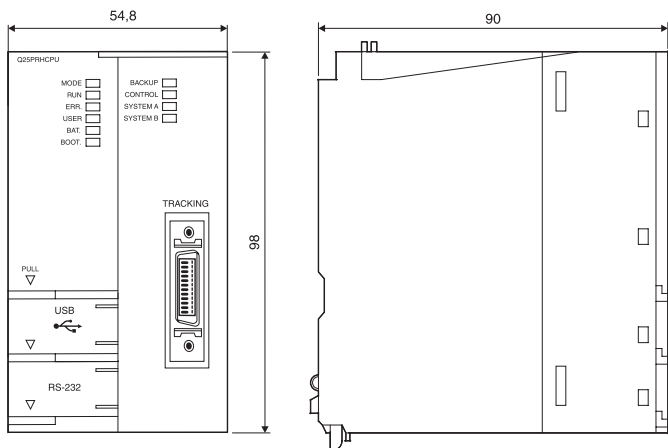


Unit: mm

■ I/O Modules and Special Function Modules

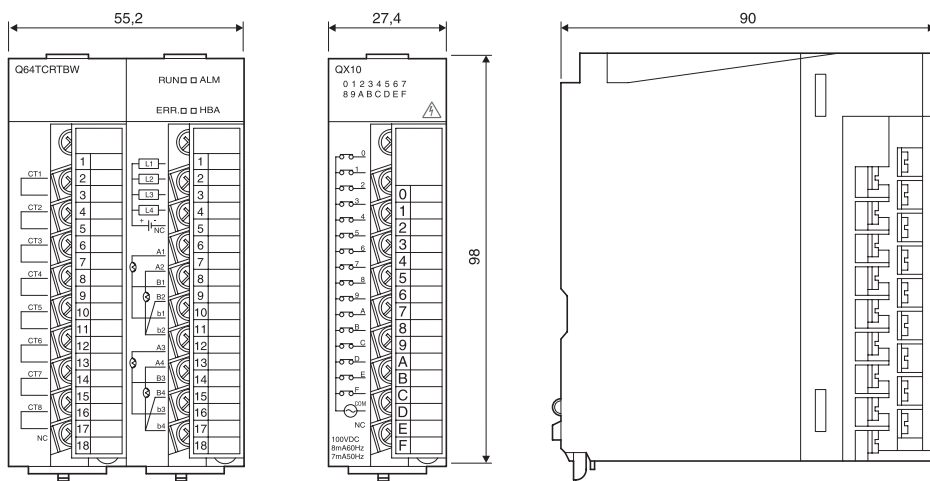

Unit: mm

■ Terminal Block Adapters

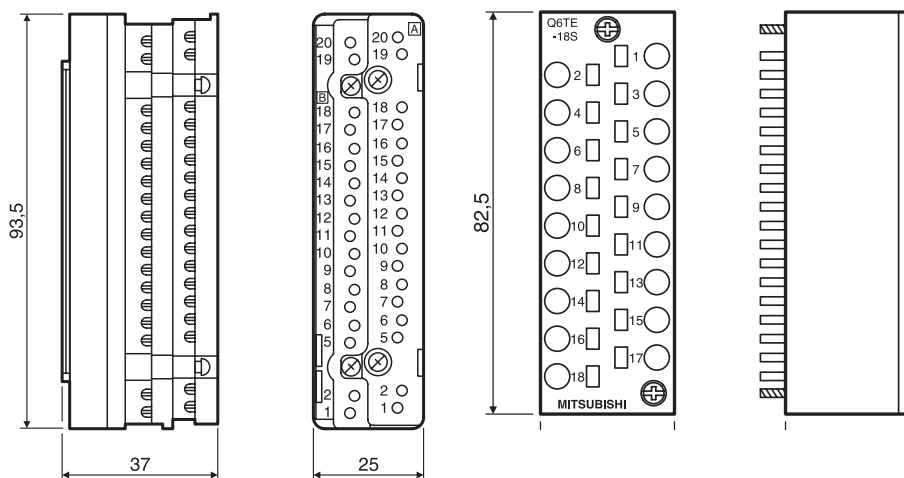


Unit: mm

■ Connectors


5

DIMENSIONS MELSEC SYSTEM Q


A6CON2

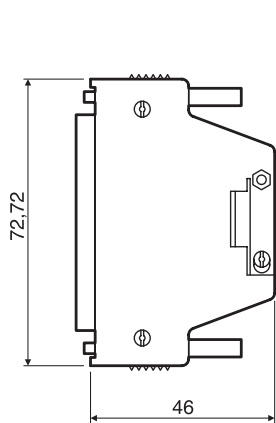

A6CON4

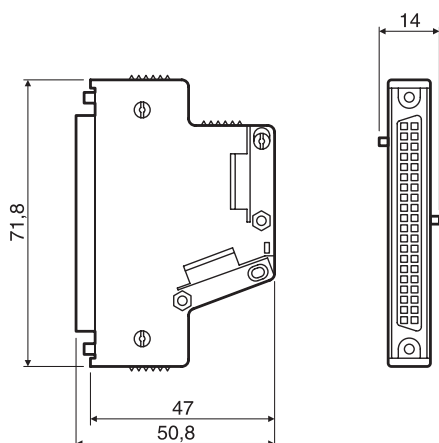

A6CON3

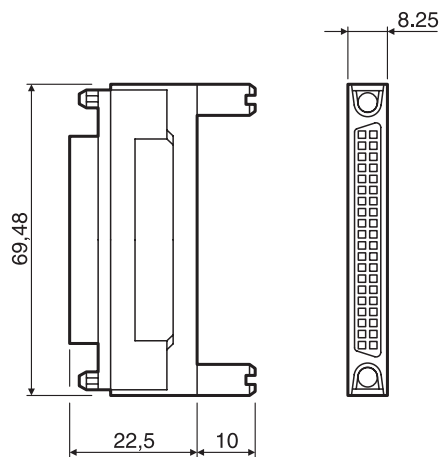

Unit: mm


Little on Size, Large on Performance: MELSEC L Series.

The MELSEC L series is a powerful but compact modular controller with many features built-in to the CPU itself. The rack-free design promotes high system flexibility with minimum form factor. Built-in Mini-B USB and Ethernet allow for easy communication, along with a built-in SD/SDHC memory slot for data logging and memory storage, and built-in digital I/O for simple high-speed counting and positioning functions.

The high-performance version CPU also includes a built-in CC-Link interface for Master/Local Station networking. This highly flexible architecture makes the L Series ideal for both stand-alone and networked machines.

- Rack-free design
- CPUs packed with comprehensive built-in features/functions
- Integrated data logging

- Built-in I/O features
- Communication and networking capabilities
- High-end 4/16-axis motion expansion possible using SSCNETIII

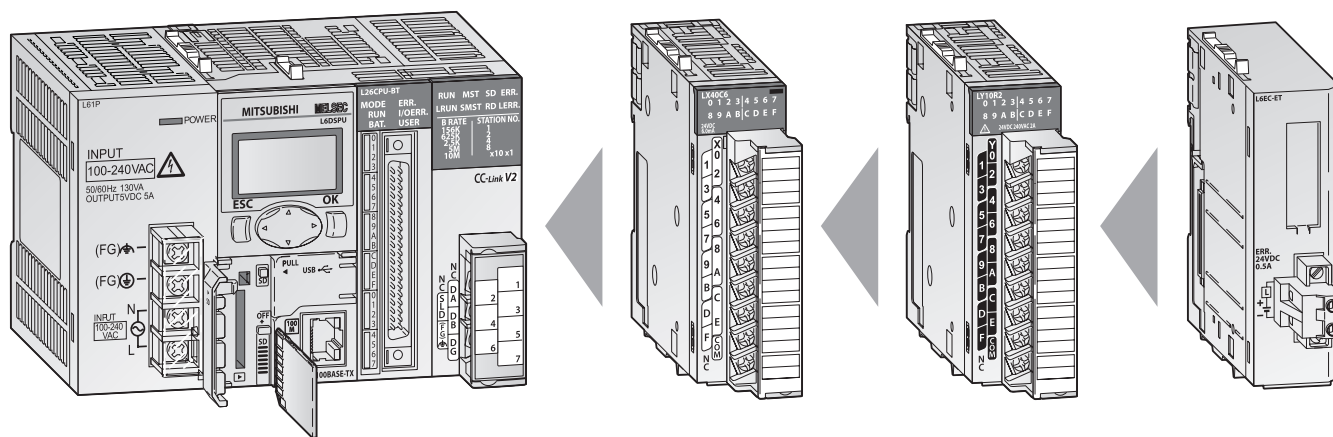

Equipment Features

The modular design of MELSEC L series allows flexible usage in a broad range of applications.

The following modules are available for assembling and expanding the system:

Use of digital and special function modules

The use of digital and analog modules and most special function modules is

dependent only on the maximum available number of addresses and thus on the CPU used in each case.

Communications modules

Modules with RS232/RS422/RS485 interface to connect devices for PLC-to-PLC communication. IO-Link module for the connection of intelligent sensors.

Network modules

For interfacing with CC-Link or CC-Link IE networks.

Positioning modules


High-speed counter modules with possibility for connection of incremental shaft encoder or multiaxial positioning modules for servo and step drives with up to 4 axes per module.

Digital input/output modules


For various signal levels with transistor, or relay switches.

Analog input/output modules

For processing current/voltage signals and for temperature value acquisition as well as temperature control.

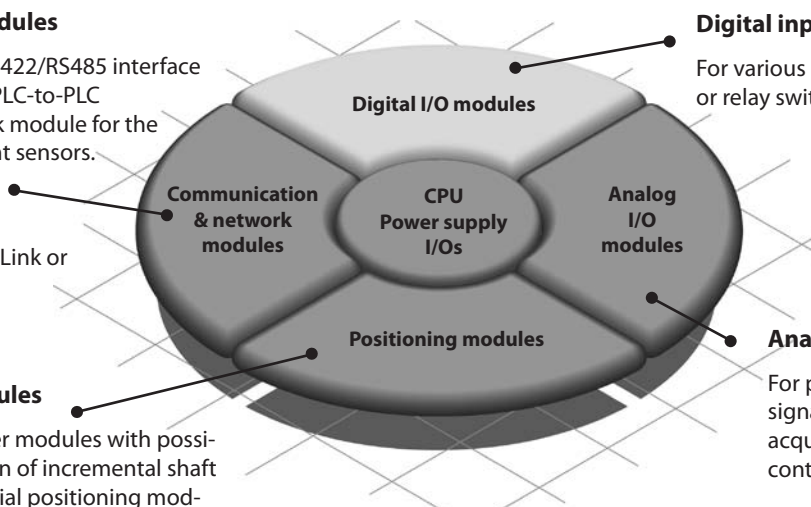

What a System Looks Like

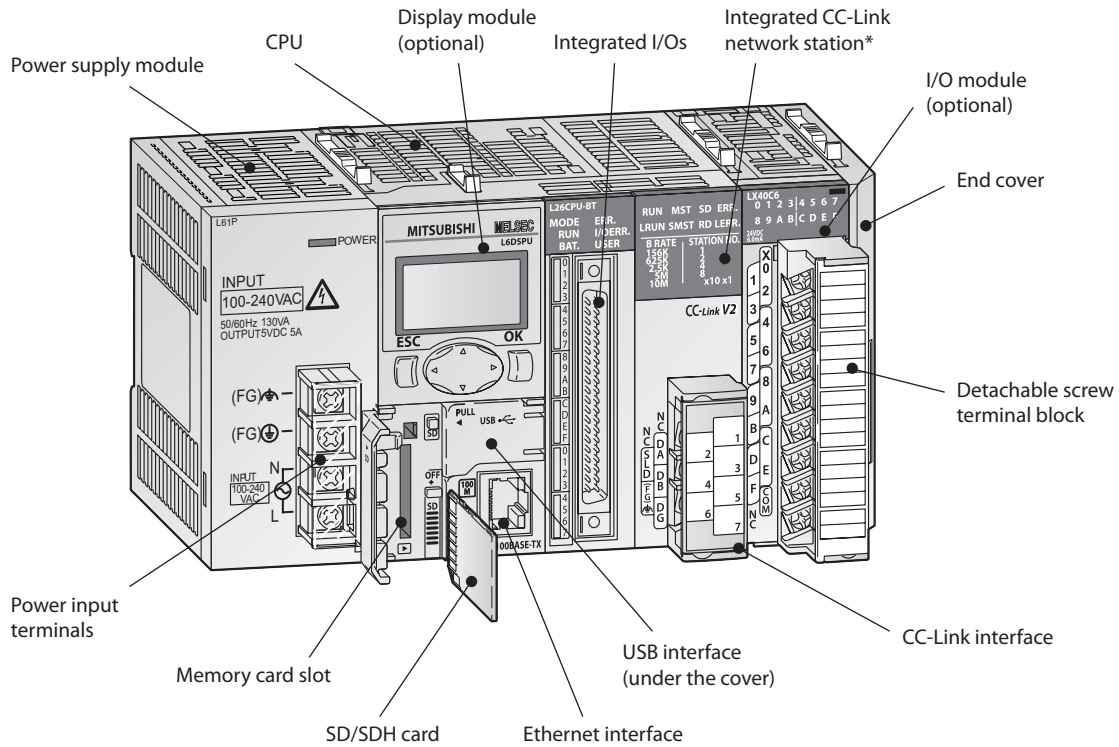

* High-performance CPU only

System structure

The L series is a powerful but compact modular controller with many features built-in to the CPU itself. The rack-free design promotes high system flexibility with minimum form factor. By connecting various types of modules, the system can be enhanced according to the application. Up to 40 expansion modules can be added per system configuration. As a baseless structure is employed, the space of the control panel can be used effectively without being limited by the size of the base.

MELSEC L series controllers are all-in-one programmable controllers that have the following functions built into the CPU module:

- 2 channels of high-speed counters up to 200 kHz
- Positioning possibilities for two axes, also up to 200 k pulses per second
- Built-in Ethernet communication

- Built-in I/Os which are available via a 40-pin high density connector supporting several I/O options
- High-speed data logging to the SD memory card
- CC-Link Ver. 2 Master/Slave interface (in the high-performance CPU)
- Full support in iQ Works and GX Works2

What You Need

Power supply

This provides 5 V DC power for all modules on the back plane. There are two types of power supplies available, the selection is dependant on the available supply voltage.

CPU

There are two CPU types available: standard and high-performance. Both CPUs come with built-in Mini-B USB and Ethernet for easy communication, along with a built-in SD/SDHC memory slot for data logging

and memory storage, as well as built-in digital I/Os for simple high-speed counting and positioning functions.

The high-performance version CPU also includes a CC-Link interface for Master/Local station networking.

I/Os

There is a wide selection of digital input and output modules depending on the signal level, sink or source designation and density of points required. Modules are available in 16 point input or output with

screw terminals mounted on the module, higher densities of 32 and 64 point require a connector, cable and terminal block.

Special function modules

For special applications analog I/O and intelligent modules for motion, positioning, high-speed counting, communication, and networking are available.

Built-in I/O Features

Every MELSEC L series CPU comes with 24 points of built-in I/Os as standard. These I/O points are capable of many functions usually reserved for separate modules. System costs can be saved by using the built-in functions rather than relying exclusively on additional modules.

Function		Features
Positioning*	Control of maximum two axes	Maximum speed: 200 kpulse/s High-speed activation: 30 μs (shortest activation time) S-curve acceleration and deceleration are supported
High-speed counter*	Two built-in channels	Maximum counting speed: 200 kpulse/s Open collector, differential line driver input High accuracy ON/OFF measurements with a resolution of 5 μs High precision PWM control up to 200 kHz (High speed pulse output)
Pulse catch	16 input points	Minimum input response time: 10 μs Pulse signals whose ON time is shorter than the scan time can be detected.
Interrupt input	16 interrupt input points	Built-in CPU provides high-speed processing. All input points support interrupt inputs.
General input	6 high-speed input points, 10 standard input points	Minimum input response time of high-speed input: 10 μs Minimum input response time of standard input: 100 μs
General output	8 output points	Output response time: 1 μs or less

* Points used by the positioning and high speed counting functions are fixed (as in A phase, B phase, near-point dog). Custom points for these functions may not be assigned.


Built-in CPU Positioning Control Function

Positioning Function

The built-in positioning function has a start time of just 30 μs with a maximum high speed output of 200 k pulses per second. Furthermore, it supports S-curve acceleration and deceleration for applications that require minimal machine vibration.

High-Speed Counter Function


Two channels support the high speed counting function. The differential line driver inputs support counting speeds up to 200 k pulses per second.

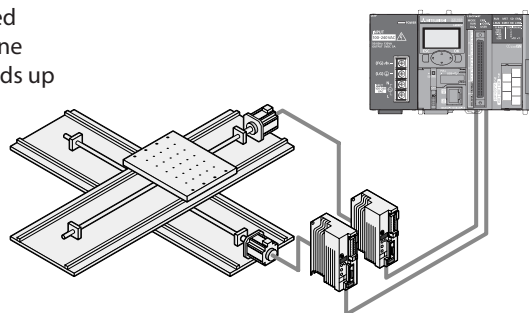

High speed data sampling

The high speed data logging function has the power to synchronize with the sequence program scan, ensuring that every value available to the program is logged for analysis.

Using this method it is possible to perform detailed operational analysis and identify existing or potential problems.


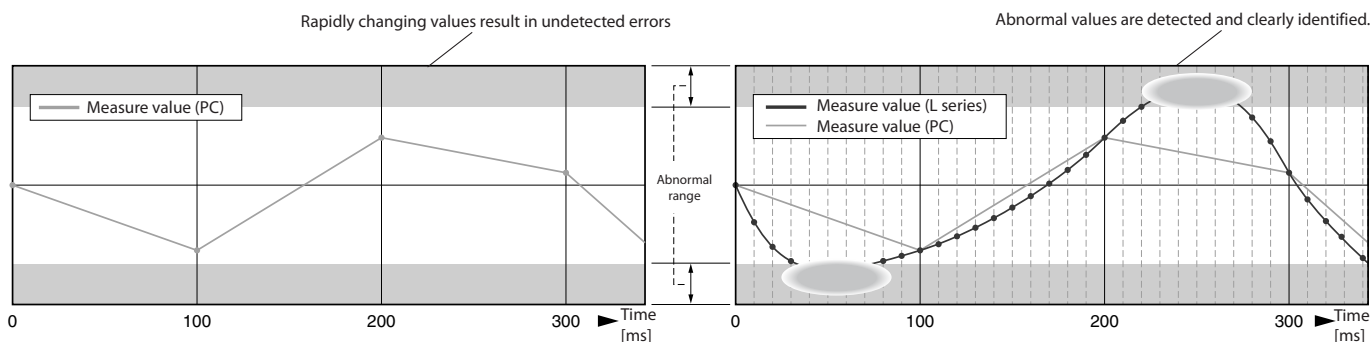


Generic sample data from a PC or external device at 100 ms intervals

L series data logging function is capable of sampling data at much higher resolutions to detect quickly changing values.

Make highly accurate measurements with a resolution of 5 μs

Using pulse measurement mode, where the input signal ON/OFF time is 200 μs or greater, highly accurate measurements in units of 5 μs or greater are possible. For example it is possible to calculate length by knowing the “work object passing speed” and measuring the ON time of the sensor.

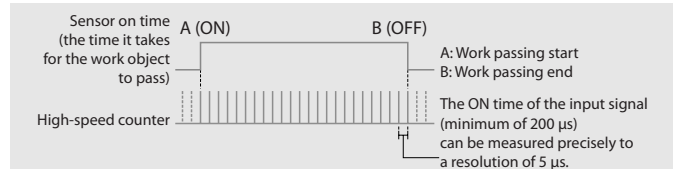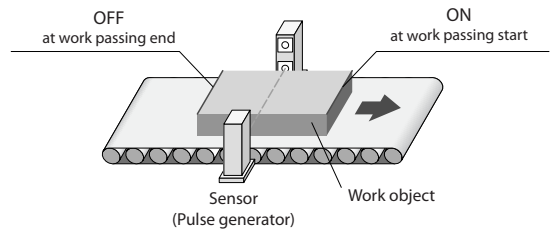


High precision PWM control up to 200 kHz


Using the pulse width modulation control function of the high speed outputs, cycle times as fast as 5 μs can be created. Simply input the ON time and cycle time to drive a wide range of devices from lighting dimmer control, motors, and heaters to precision inspection equipment requiring high resolution performance.

	Setting Range	Description
PWM output ON time*	0 or 10 to 10000000 * [0.1 μs]	Set the ON time of output pulse
PWM output cycle time*	50 to 1000000 * [0.1 μs]	Set the cycle time of output pulse

* The PWM output ON time must be ≤ the PWM output cycle time.




Lighting dimmer control using PWM output

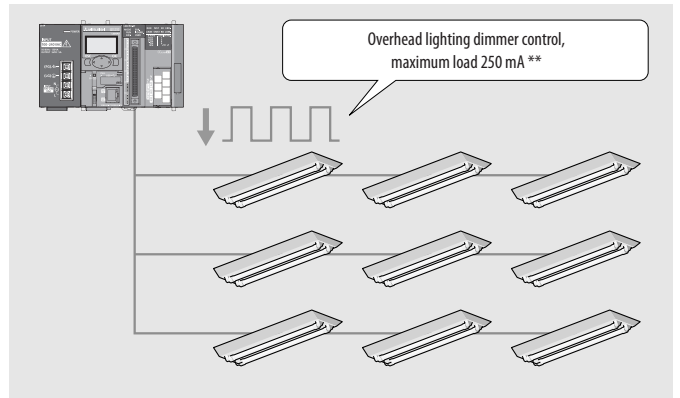

** In cases where the first six digits of the serial number are “120722” or later. Previous serial numbers of the CPU module are applied to 100 mA.

Guaranteed input pulse detection


Typical PLC input devices are unable to detect pulse signals whose ON time is shorter than the scan time or do not occur during I/O refresh periods. The pulse catch function allows these signals to be reliably detected and passed to the sequence program. This function is different from the interrupt input function in that it does not require any special programming. Pulse catch inputs may be used in programs exactly the same as traditional input (X) signals.

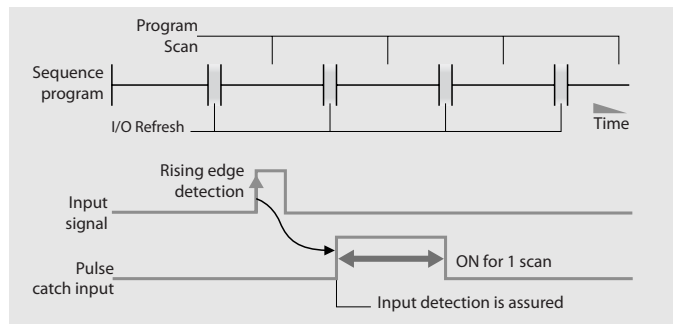

Data logging function

The built-in data logging function provides an easy way to collect information for troubleshooting, performance evaluation, and other uses. The included configuration tool makes setting up the data logging function a breeze with a step-by-step wizard like interface. Using GX LogViewer, the captured data is easy to interpret and understand.


Configuration tool

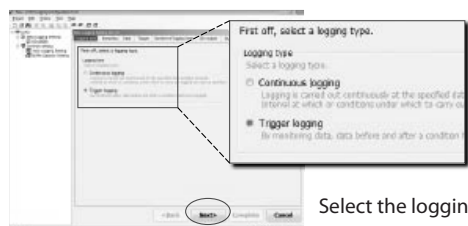

Select the logging type.

Make the desired settings on each screen and click the **Next** button until all settings are complete.

■ Power Supply

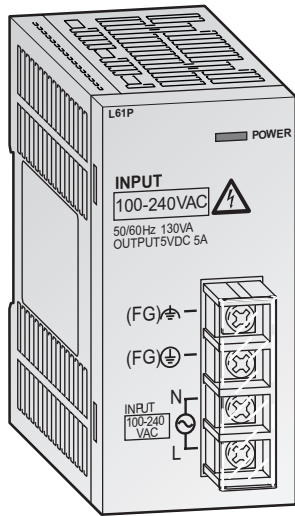


These units power the CPU and all connected modules. The choice is dependent on the input power that is available.

Special features:

- The power supply L61P is operated with a voltage of 100 to 240 VA C at 50/60 Hz and can be used worldwide.
- The power supply L63P is connected to 24 V DC.
- LED indicator for operating status
- Screw terminals for power input on the front side

Specifications	L61P	L63P
Input voltage	(+10 %, -15 %) V AC	100–240
	(+30 %, -35 %) V DC	—
Input frequency	Hz	50/60 (±5 %)
Inrush current		20 A within 8 ms
Max. input apparent power		130 VA
Max. input power		—
Rated output current (5 V DC)	A	5
Overcurrent protection (5 V DC)	A	≥5.5
Overvoltage protection	V	5.5–6.5 V
Efficiency		≥70 %
Max. compensation time at power failure	ms	Within 10 ms
Fuse		Built-in (not replaceable by the user)
Weight	kg	0.32
Dimensions (WxHxD)	mm	45x90x109
Order information	Art. no.	238063
		238064

■ CPU Modules

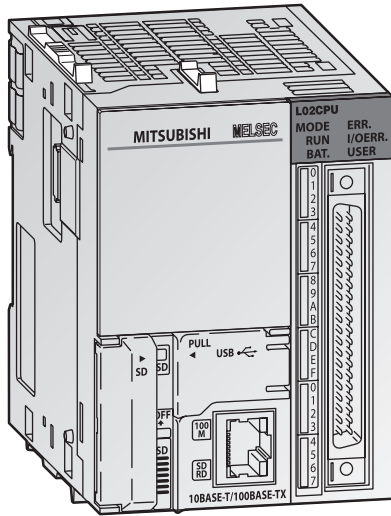

The CPU modules are the heart of a MELSEC L series system and contain a diverse range of control functions. Every CPU comes with 24 points of built-in I/Os.

For many standard applications the L02CPU-P is appropriate. When higher operation processing speed and larger program capacity is needed the L26CPU-PBT is the right choice. This CPU provides furthermore a built-in CC-Link connectivity.


Special features:

- High-speed processing
- Large memory capacity
- Integrated USB port for programming
- Integrated Ethernet interface for efficient network or PC communication
- SD card memory slot for quick and easy back-up of programs and parameters

Specifications	L02CPU/L02CPU-P	L26CPU-BT/L26CPU-PBT
Control method	Stored program repeat operation	
I/O points	1024/8192*	4096/8192*
Programming language	Function block, relay symbol language, MELSAP3 (SFC), MELSAP-L, structured text (ST), logic symbolic language	
Basic operation processing speed	40 ns	9.5 ns
Program size (no. of steps)	20 k	260 k
Memory capacity	Program memory	80 k steps
	Memory card	Depends on the SD/SDHC memory card used
	Standard RAM	128 k
	Standard ROM	512 k
Built-in functions	Integrated I/Os	16 inputs (24 V DC)/8 outputs (5–24 V DC, 0.1 A per channel)
	Data logging	10 data logging settings (for each any of 32–4832 kB can be specified)
	Ethernet connectivity	10BASE-T/100BASE-TX (10/100MBit/s)
	CC-Link connectivity	—
Timer (T)	2048	
Counter (C)	1024*	
Relay (M)	8192*	
Latch relay (L)	8192*	
Edge relay (V)	2048*	
Special relay (SM)	2048	
Data register (D)	12288*	
Extended data register (D)	32768*	131072*
Special register (SD)	2048	
File register (R)	32768 (max. 65536 points by switching blocks)	32768 (max. 393216 points by switching blocks)
Interrupt pointer (I)	256	
Pointer (P)	4096	
Annunciator (F)	2048*	
Index register (Z)	20	
Link relay (B) / Link register (W)	8192*/8192*	
Function inputs (FX) / function outputs (FY)	16/16	
Function register	5	
Nbr. of possible extensions	2	3
Max. nbr. of modules to be connected	30	40
Internal power consumption (5 V DC)	A 0.94 (without display unit) 1.00 (with display unit)	1.37 (without display unit) 1.43 (with display unit)
Weight	kg 0.37	0.47
Dimensions (WxHxD)	mm 70x90x95	98.5x90x118
Order information	Art. no. 244976	244977

* The number of these devices can be changed in the PLC parameters. The stated values correspond to the default setting.

■ Digital Input Modules

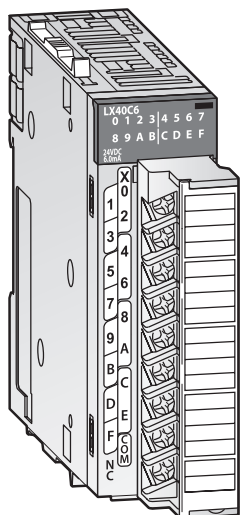

Detection of digital input signals

Various input modules are available for converting digital process signals with different voltage levels into the levels required by the PLC.

All models are capable of using both positive or negative common connections, so that separate modules are not necessary.


Special features:

- Indication of input status via LED
- Positive/negative common
- Response time 1 to 70 ms
- Modules with 16, 32 or 64 input points available

Specifications	LX40C6	LX10	LX41C4	LX28	LX42C4	
Number of input points	16	16	32	8	64	
Rated input voltage	V DC 20.4–28.8	100–120 V AC, 50/60 Hz	20.4–28.8	100–240 V AC, 50/60 Hz	20.4–28.8	
Rated input current	mA 6.0	8.2 (100 V AC, 60 Hz) 6.8 (100 V AC, 50 Hz)	4.0	16.4 (200 V AC, 60 Hz) 13.7 (200 V AC, 50 Hz) 8.2 (100 V AC, 60 Hz) 6.8 (100 V AC, 50 Hz)	4.0	
Input derating (for rated voltage)	100 %	100 % (at 50 °C)	100 %	100 % (at 50 °C)	100% (at 35 °C)	
ON	Voltage V	≥15	≥8	≥19	≥80	≥19
	Current mA	≥4	≥5	≥3	≥5	≥3
OFF	Voltage V	≤8	≤30	≤9	≤30	≤9
	Current mA	≤2	≤1.7	≤1.7	≤1.7	≤1.7
Response time	ms ≤1–70 ①	OFF → ON: ≤ 15 ON → OFF: ≤ 20	≤1–70 ①	OFF → ON: ≤ 10 ON → OFF: ≤ 20	≤1–70 ①	
Inputs per group:	16	16	32	16	32	
I/O points	16	16	32	16	64	
Status display for the inputs	As operation indicator, all modules are equipped with a LED for each input.					
Connection terminal	18-point removable terminal block with screws	18-point removable terminal block with screws	40-pin connector	18-point removable terminal block with screws	40-pin connector x 2	
Internal power consumption (5 V DC)	mA 90	90	100	80	120	
Weight	kg 0.15	0.17	0.11	0.15	0.12	
Dimensions (WxHxD)	mm 28.5x90x117	28.5x90x117	28.5x90x95	28.5x90x117	28.5x90x95	
Order information	Art. no. 238085	255566	238086	255567	238087	

① Can be changed in the PLC parameters (Default: 10 ms)

■ Digital Output Modules

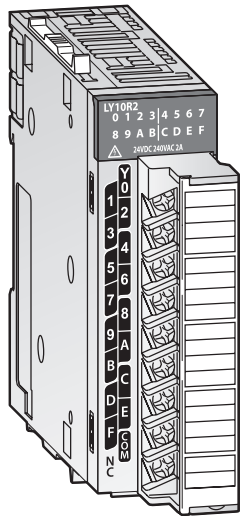

Switching of external processes and devices

The MELSEC L series output modules have different number of outputs and different switching elements for adaptation to many control tasks.


Modules are built with countermeasures in case of external load short-circuits to protect against over-current and overheating.

Special features:

- Indication of output status via LED
- Sink and source type modules available
- Response time less than 0.5 ms for transistor output modules
- Modules with 16, 32 or 64 output points available

Specifications	LY10R2	LY20S6	LY40NT5P	LY41NT1P	LY42NT1P	LY40PT5P	LY41PT1P	LY42PT1P
Number of output points	16	16	16	32	64	16	32	64
Output type	Relay	Triac	Transistor (sink type)	Transistor (sink type)	Transistor (sink type)	Transistor (source type)	Transistor (source type)	Transistor (source type)
Outputs in groups of	16	16	16	32	32	16	32	32
Rated load voltage	24 V DC/240 V AC	100–240 V AC, 50/60 Hz	24 V DC	24 V DC	24 V DC	24 V DC	24 V DC	24 V DC
Max. switching load	A 2 (8 common)	0.6 (4.8 common)	0.5 (5 common)	0.1 (2 common)	0.1 (2 common)	0.5 (5 common)	0.1 (2 common)	0.1 (2 common)
Response time	OFF → ON	≤10	Total of 1 ms and 0.5 cycles or less	≤0.5	≤0.5	≤0.5	≤0.5	≤0.5
	ON → OFF	≤12	Total of 1 ms and 0.5 cycles or less (resistive load)	≤1	≤1	≤1	≤1	≤1
Load voltage range	<125 V DC/ <264 V AC	85–264 V AC	10.2–28.8 V DC	10.2–28.8 V DC	10.2–28.8 V DC	10.2–28.8 V DC	10.2–28.8 V DC	10.2–28.8 V DC
Protective functions	—	—	Overload protection function, overheat protection function					
I/O points	16	16	16	32	64	16	32	64
Status display for the outputs	As operation indicator, modules with 16 or 32 outputs are equipped with a LED for each output. Modules with 64 outputs have a switchable display with 32 LEDs.							
Connection terminal	18-point removable terminal block with screws	18-point removable terminal block with screws	18-point removable terminal block with screws	40-pin connector	40-pin connector x 2	40-pin connector	40-pin connector	40-pin connector x 2
External power supply of the module	—	—	10.2–28.8 V DC, 9 mA	10.2–28.8 V DC, 13 mA	10.2–28.8 V DC, 9 mA	10.2–28.8 V DC, 17 mA	10.2–28.8 V DC, 20 mA	10.2–28.8 V DC, 20 mA
Internal power consumption 5 V DC	mA 460	300	100	140	190	100	140	190
Weight	kg 0.21	0.22	0.15	0.11	0.12	0.15	0.11	0.12
Dimensions (WxHxD)	mm 28.5x90x117	28.5x90x117	28.5x90x95	28.5x90x95	28.5x90x95	28.5x90x95	28.5x90x95	28.5x90x95
Order information	Art. no. 238088	255568	242167	238089	238090	242168	242169	242170

■ IO-Link Module

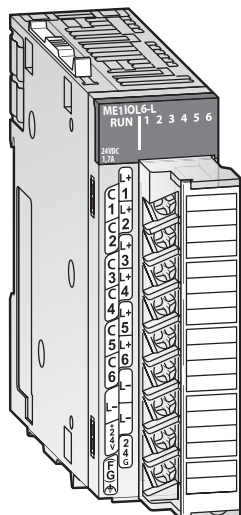

Master module for I/O Link


IO-Link is an extension of conventional digital inputs and outputs and allows the connection of intelligent sensors and actuators to a PLC. The 32-byte input and output data for each device are transmitted over standard cables, special bus cables or communication settings are not necessary.

Special features:

- Master module for up to six IO-Link devices
- Each channel of the ME11OL6-L can also be configured as a normal digital input or output.
- Masking of input data simplifies the data processing by the PLC CPU
- At a stop of the PLC CPU, the output states can either be deleted or retained.
- The parameterized device configuration is checked at the beginning of the IO-Link communication and deviations are detected.
- Storage of the parameters of the IO-Link devices allows the rapid exchange of the device

Specifications		ME11OL6-L
Nbr. of channels		6
Channel configuration		IO-Link, digital output, digital input, disabled
IO-Link	Rated load voltage	24 V DC
	Rated output current	15 mA
	Sensor/actuator power supply	200 mA
Digital input	Common point	Positive
	Rated load voltage	24 V DC
	Rated input current	5 mA
	Input filter	200 μ s
Digital output	Rated load voltage	24 V DC
	Output type	Source
Rated output current		In total max. 215 mA
Actuator supply		In total max. 215 mA
Protective functions		Overcurrent, overload, short circuit
I/O points		32
Connection terminal		18-point removable terminal block with screws
Applicable cables	Cable type	Unshielded cable
	Max. length	20 m
	Cross-section	0.3–0.75 mm ²
External power consumption	Voltage	24 V DC (+20 %, -15 %)
	Current	Max. 1.7 A
Weight	kg	0.18
Dimensions (WxHxD)	mm	28.5x90x117
Order information	Art. no.	245825

■ Analog Input Modules

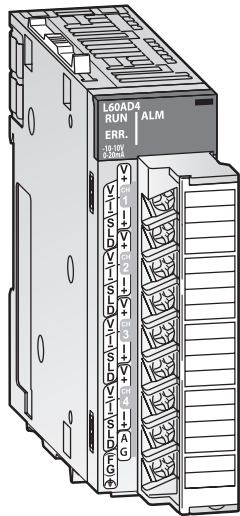

Analog to digital conversion

The analog input module converts analog process signals, for example pressure, flow or fill level, linearly into digital values, which are further processed by the L series CPU.


Special features:

- High-speed conversion of 20 μs/channel
- High conversion accuracy of +/-0.1 %
- High resolution of 1/20000
- Ensured stability with variable conversion speed
- Easy parameter setting

Specifications		L60AD4	
Input points		4	
Analog input	Voltage	V DC	-10–10
	Current	mA DC	0–20
Digital output		-20480–20479 (-32768–32767)*	
Load resistance	Voltage	MΩ	1
	Current	Ω	250
Max. input	Voltage	V	±15
	Current	mA	30
I/O characteristics	Digital Value	-20000–20000	
Max. resolution	Voltage input	μV	200
	Current input	nA	800
Overall accuracy		±0.2 % (0–55 °C), ±0.1 % (20–30 °C)	
Conversion speed		Depending on the function used: 1 ms/channel, 80 μs/channel (default), 20 μs/channel	
Insulation method		Photocoupler isolation between input terminals and power supply. No isolation between the channels.	
I/O points		16	
Connection terminal		18-point removable terminal block with screws	
Applicable wire size		mm ²	0.3–0.75
Internal power consumption 5 V DC		mA	520
Weight		kg	0.19
Dimensions (WxHxD)		mm	28.5x90x117
Order information	Art. no.	238091	

* Value in brackets when using the scaling function

■ Analog Output Modules

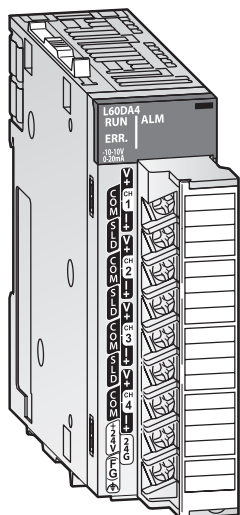

Digital to analog conversion

The analog output module converts digital values predetermined by the CPU into analog current or voltage signal.

The L60DA4 can also output wave-shaped analog signals at its outputs. Any signal form can be easily defined using GX Works 2. This is then stored as digital values in the L60DA4. The signals, which are now independent of the PLC program, are particularly suitable for fast and accurate control of presses and injection moulding machines. In combination with a servo amplifier, this function is ideal for implementing profile torque regulation.


Special features:

- High-speed conversion of 20 μ s/channel
- High conversion accuracy of ± 0.1 %
- High resolution of 1/20000
- Easy parameter setting
- Integrated scaling function

Specifications		L60DA4	
Output points		4	
Digital input		-20480–20479 (-32768–32767)*	
Analog output	Voltage	V DC	-10–10
	Current	mA DC	0–20
Load resistance	Voltage	M Ω	0.001–1
	Current	Ω	0–600
I/O characteristics	Digital value	-20000–20000	
Max. resolution	Voltage input	μ V	200
	Current input	nA	700
Overall accuracy	$\pm 0.3\%$ (0–55 °C), $\pm 0.1\%$ (20–30 °C)		
Conversion speed	20 μ s/channel		
Insulation method	Photocoupler isolation between output terminals and power supply. No isolation between the channels. Transformer between external power supply and the outputs.		
I/O points	16		
Connection terminal	18-point removable terminal block with screws		
Applicable wire size	mm ²	0.3–0.75	
External power consumption	24 V DC, +20 %, -15 %, 0.18 A		
Internal power consumption 5 V DC	mA	160	
Weight	kg	0.20	
Dimensions (WxHxD)	mm	28.5x90x117	
Order information	Art. no.	238092	

* Value in brackets when using the scaling function

Temperature Control Modules

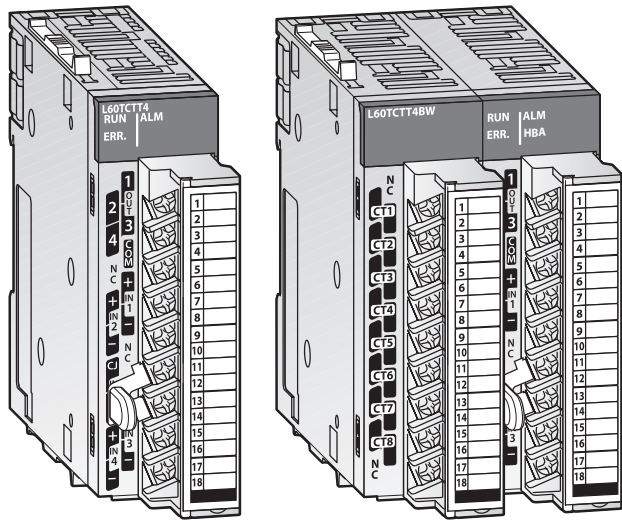

Temperature control modules with PID algorithm


These modules apply the independent control of temperatures. This relieves the CPU of the PLC.

Special features:

- 4 channels for temperature detection and 4 separate loops of temperature adjustment per module
- Modules for thermocouples and for Pt100 resistance thermometers are available
- Auto tuning function for optimum temperature adjustment control (PID control)
- The modules or single channels of a module can also be used for temperature detection.
- Temperature control can continue even when the PLC program is stopped
- Heating current monitoring at modules L60CTT4BW and L60CRT4BW to detect a defective or disconnected heater.

Specifications	L60CTT4	L60CRT4	L60CTT4BW	L60CRT4BW	
Control output type	Transistor	Transistor	Transistor	Transistor	
Inputs	4 channels per module	4 channels per module	4 channels per module	4 channels per module	
Supported temperature sensors	Thermocouple	Pt100 resistance thermometer	Thermocouple	Pt100 resistance thermometer	
Sampling cycle	250 ms/4 channels	250 ms/4 channels	250 ms/4 channels	250 ms/4 channels	
Control output cycle	0.5–100 s	0.5–100	0.5–100	0.5–100	
Input filter	1–100 s (0 s: input filter OFF)				
Temperature control method	PID ON/OFF impulse or 2-position control				
PID constant range	Setting with automatic tuning possible				
	Proportional band P 0.0–1000 % (0 %: 2-position control)				
	Integral time I 1–3600 s (set 0 for P control and PD control)				
	Differential time D 1–3600 s (set 0 for P control and PI control)				
Target value setting range	Within the temperature range set in the thermocouples/resistance thermometers used				
Dead band setting range	0.1–10.0 %	0.1–10.0 %	0.1–10.0 %	0.1–10.0 %	
Transistor output	Output signal (sink)	ON/OFF pulse	ON/OFF pulse	ON/OFF pulse	ON/OFF pulse
	Rated load voltage	10–30 V DC	10–30 V DC	10–30 V DC	10–30 V DC
	Max. load current	0.1 A/1 point, 0.4 A/common	0.1 A/1 point, 0.4 A/common	0.1 A/1 point, 0.4 A/common	0.1 A/1 point, 0.4 A/common
	Max. rush current	400 mA for 10 ms	400 mA for 10 ms	400 mA for 10 ms	400 mA for 10 ms
	Max. voltage drop when ON	0.1 V DC (TYP) 0.1 A 2.5 V DC (MAX) 0.1 A	0.1 V DC (TYP) 0.1 A 2.5 V DC (MAX) 0.1 A	0.1 V DC (TYP) 0.1 A 2.5 V DC (MAX) 0.1 A	0.1 V DC (TYP) 0.1 A 2.5 V DC (MAX) 0.1 A
	Response time	OFF → ON: <2 ms ON → OFF: <2 ms	OFF → ON: <2 ms ON → OFF: <2 ms	OFF → ON: <2 ms ON → OFF: <2 ms	OFF → ON: <2 ms ON → OFF: <2 ms
Insulation method	Transformer between input channels and the power supply and between the inputs				
I/O points	16	16	16	16	
Connection terminals	All modules are fitted with a terminal block with 18 screw terminals.				
Applicable wire size	mm ² 0.3–0.75	0.3–0.75	0.3–0.75	0.3–0.75	
Internal power consumption (5 V DC)	mA 300	310	330	350	
Weight	kg 0.18	0.18	0.33	0.33	
Dimensions (WxHxD)	mm 28.5x90x117	28.5x90x117	57x90x117	57x90x117	
Order information	Art. no. 246347	246348	246349	246350	

High-Speed Counter Modules

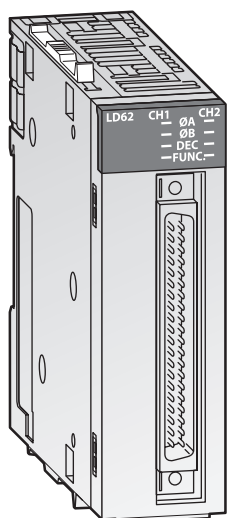

Fast signal counting


The counter modules detect high-frequency signals, which cannot be handled by normal input modules.

Special features:

- Periodic pulse counter function
- High-speed pulse measurement of up to 500 k pulses/s (LD62D)
- Linear and latch counter
- Ring counter function for counting up to a predefined value with automatic resetting to the start value
- Operation of integrated outputs when predefined count values are reached
- Easy configuration of the modules with GX Works2

Specifications	LD62	LD62D
Counter inputs (channels)	2	2
Count input signal	Phase	1-phase input (multiple of 1/2), CW/CCW, 2-phase input (multiple of 1/2/4)
	Signal level	5/12/24 V DC (2–5 mA)
Max. counting frequency	kHz 200	500
Counting range	32 bits + sign (binary), -2147483648–+2147483647	32 bits + sign (binary), -2147483648–+2147483647
Max. counting speed	kHz 200, 100 or 10	500, 200, 100 or 10
Counting functions	UP/DOWN preset counter and ring counter	
Comparison range	32 bits + sign (binary)	
Comparison functions	Set value < counted value, set value = counted value, set value > counted value	
Connection terminal	40-pin connector	40-pin connector
External digital input points	Preset, function start	
	Rated values	5/12/24 V DC (2–5 mA)
External digital output points (coincidence signal)	2 points/channel 12/24 V DC 0.5 A/point, 2.0 A/common (sink)	2 points/channel 12/24 V DC 0.5 A/point, 2.0 A/common (sink)
I/O points	16	16
Internal power consumption	mA 310	360
Weight	kg 0.13	0.13
Dimensions (WxHxD)	mm 28.5x90x95	28.5x90x95
Order information	Art. no. 238097	238098

Interface Modules

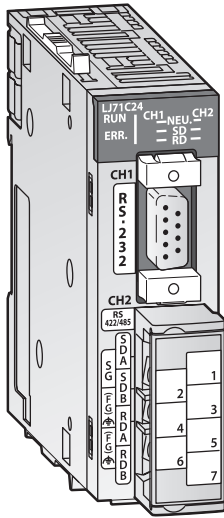

Data exchange with peripheral devices

These modules enable communication with peripheral devices via a standard serial interface.


The LJ71C24 provides one RS232 and one RS422/485 interface and the LJ71C24-R2 provides two RS232 interfaces.

Special features:

- Maximum transmission speed of 230.4 kbps
- Quick connection using pre-defined protocols included in GX Works2
- Easy to define custom protocols
- Enhanced debugging and support functions

Specifications		LJ71C24	LJ71C24-R2
Interface type	channel 1	RS232-compliance (D-Sub 9P female)	RS232-compliance (D-Sub 9P female)
	channel 2	RS422/485-compliance (2-piece terminal block)	RS232-compliance (D-Sub 9P female)
Communications mode		Full duplex/half duplex	
Synchronisation		Start-stop synchronization method	
Data transfer	Rate	50–230400, 115200 (with simultaneous operation of channel 1 and 2, and fault diagnosis by the monitor function)	
	Distance	RS232: 15; RS422/485: 1200	15
Network configuration		RS232: 1:1RS422/485: 1:1, 1:n, n:1, m:n	1:1
1 or 2 stop bits		1 start bit, 7 or 8 data bits, 1 or 0 parity bits, 1 or 2 stop bits	
Error detection		Parity check, checksum	
DTR/DSR and RS/CD control		RS232 enabled, RS422/485 disabled	
CD signal control		RS232 enabled, RS422/485 disabled	
X ON/X OFF (DC1/DC3), DC2/DC4		RS232 enabled, RS422/485 enabled	
I/O points		32	32
Internal power consumption		mA 390	260
Weight		kg 0.17	0.14
Dimensions (WxHxD)		mm 28.5x90x95	28.5x90x95
Order information		Art. no. 238093	238094

■ Positioning Modules

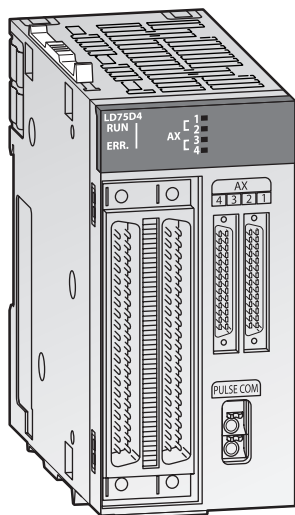

Control of high resolution drives

The L series offers two different positioning modules for control of up to four axes.

- Differential output type (LD75D1/2/4)
- Open-collector output type (LD75P1/2/4)

These positioning modules can be used with standard type servo amplifiers (Mitsubishi Electric MR-E, MR-J3/MR-J4).

All L series positioning modules can provide functionality such as interpolation, speed positioning operation etc.

The open-collector output type module provides positioning with open loop control. The module generates the travel command via the pulse chain. The speed is proportional to the pulse frequency and the distance travelled is proportional to the pulse length.


The modules with differential output can bridge large distances between the module and the drive unit, since this output enables long connection cables.

Special features:

- Up to 600 positioning data per axis
- Maximum output pulse of 200 k pulses/s for LD75P1/2/4 and 4 M pulses/s for LD75D1/2/4
- High speed control of high resolution devices such as linear servos and direct drive motors
- Reduced machine vibration by using the optional acceleration/ deceleration system
- Visualization of positioning module buffer data with customizable graphs

Specifications	LD75P1/LD75D1	LD75P2/LD75D2	LD75P4/LD75D4
Accessible axes	1	2	4
Output frequency	pulse/s —	2-axis linear interpolation, 2-axis circular interpolation	2-/3-/4-axis linear interpolation, 2-axis circular interpolation
Positioning data items per axis	600		
Output type	Open collector/Differential driver	Open collector/Differential driver	Open collector/Differential driver
Output signal	Pulse chain	Pulse chain	Pulse chain
Positioning	Method	PTP (Point To Point) control, path control (both linear and arc can be set), speed control, speed-position switching control, position-speed switching control	
	Range	Absolute/incremental system: -214 748 364.8–214 748 364.7 μm -21 474.83648–21 474.83647 inch 0–359.99999 degree (absolute); 21 474.83648–21 474.83647 (incremental) -2 147 483 648–2 147 483 647 pulse	
		In speed-position switching control (INC mode)/position-speed switching control: 0–214 748 364.7 μm 0–21 474.83647 inch 0–21 474.83647 degree 0–2 147 483 647 pulse	
	Speed	1–1 000 000 pulse/s 0.01–20 000 000.00 mm/min 0.001–200 000.000 degree/min 0.001–200 000.000 inch/min	
	Acceleration/ deceleration processing	Automatic trapezoidal or S-pattern acceleration and deceleration or automatic S-pattern acceleration and deceleration	
	Acceleration/ deceleration time	1–83 88 608 ms (four patterns can be set for each of acceleration time and deceleration time)	
Rapid stop deceleration time	1–8 388 608 ms		
I/O points	32		
Internal power consumption	mA 440/510	480/620	550/760
Weight	kg 0.18	0.18	0.18
Dimensions (WxHxD)	mm 45x90x95		
Order information	Art. no. 251446/251448	251447/251449	238096/238095

■ Simple Motion Modules

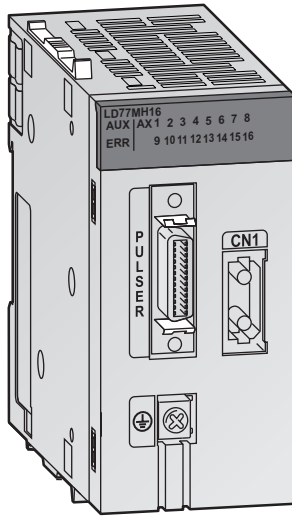

The MELSEC L series lineup includes a Simple Motion Module in addition to the regular positioning modules. Various control functions previously only possible with Motion Controllers, such as speed control, torque control, synchronous control and cam control, are now available with the LD77MH module. These functions can be realized with simple parameter adjustments and via the PLC program.

Mark sensors allow use in packaging industry, filling plants, etc., without additional optional modules. A function for automatic calculation of cam data for applications with rotating cutters is implemented – only by setting the length of the product and the synchronisation path. With positioning functions, like linear interpolation (up to 4 axes), circular interpolation (2 axes) and path control it is easy to realize different applications, like X-Y tables, sealing, etc.


Proved and tested programs for the QD75MH can be used, since the module LD77MH is compatible with the QD75MH.

Special features:

- Compatible with QD75MH
- Up to 600 positions per axis
- External encoder input for axis synchronisation
- Electronic cam control
- High-speed digital inputs for mark sensors to capture encoder position, motor position etc.
- Parameterization, programming, diagnostics and test operation by GX Works2
- PLCopen function blocks
- Communication between the LD77MH module and servo amplifiers via the high-speed network SSCNETIII

Specifications		LD77MH4	LD77MH16
Number of controllable axes		4	16
Interpolation functions		Linear interpolation for up to 4 axes, circular interpolation for 2 axes	2 axes linear and circular interpolation
Output type		SSCNETIII	SSCNETIII
Output signal		Bus	Bus
Servo amplifier		MR-J3-B5 and MR-J4-B servo amplifier range (over SSCNETIII)	
Operation cycle		0.88 ms	0.88 ms/1.7 ms
Positioning	Method	PTP (Point To Point) control, path control (both linear and arc can be set), speed control, speed-position switching control, position-speed switching control, torque control	
	Acceleration/deceleration control	Trapezoidal or S-pattern acceleration and deceleration	
	Compensation	Backlash compensation, electronic gear, near pass function	
	OPR control	5 different methods	
Number of positioning points		600 per axis (can be set with GX Works2 or PLC program)	
External input signals	Encoder	1 Encoder A/B phases	
	High-speed inputs	4 digital inputs [D0~D1]	
Cam function	Storage area cam data	256 kbytes	
	Number of cams	Max. 256 (depending on resolution)	
	Resolution per cycle	256, 512, 1024, 2048, 4096, 8192, 16384, 32768	
	Stroke resolution	2–16284	
I/O points		32	32
Nbr. of Simple Motion modules in one system		Max. 5	
Internal power consumption (5 V DC)		A 0.55	0.70
Weight		kg 0.22	0.22
Dimensions (WxHxD)		mm 90x45x95	90x45x95
Order information		Art. no. 241243	241244

■ CC-Link Module

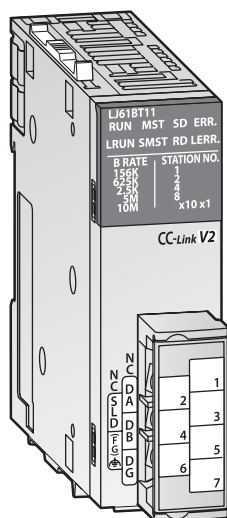

The gateway to CC-Link

The CC-Link network enables the controlling and monitoring of decentralized I/O modules at the machine. The CC-Link master/slave module LJ61BT11 makes the L series fully compatible with CC-Link.

With a large selection of CC-Link open network compatible devices, constructing a control system is easy.

Even applications requiring vast amounts of data transmissions can be satisfied because CC-Link Version 2 is supported.


Special features:

- Can be used as Master or Local station
- A huge selection of device types using CC-Link can be connected.
- With the transmission speed auto-tracking function local stations do not require transmission speed setting
- Up to 8192 addressable remote I/O points
- Maximum transmission speed of 10 Mbps
- Standby master station function

Specifications	LJ61BT11	
Module type	Master/Slave	
Max. no. of connected stations	64	
Max. overall cable distance	m	1200 (without repeater)
No. of occupied stations	1–4 stations	
Max. nbr. of link points	per system	2048 (8192)*
	per station	32
Transmission method	Broadcast polling method	
Synchronous method	Frame synchronization	
Synchronous method	NRZI method	
Transmission speed	156 kbps/625 kbps/2.5 Mbps/5 Mbps/10 Mbps	
Transmission path	Bus (RS485)	
I/O points	32	
Internal power consumption	mA	460
5 V DC		
Weight	kg	0.15
Dimensions (WxHxD)	mm	28.5x90x95
Order information	Art. no.	238099

* Number of link points in „remote net ver. 2” mode” or „remote net additional mode”

■ CC-Link IE Field Modules

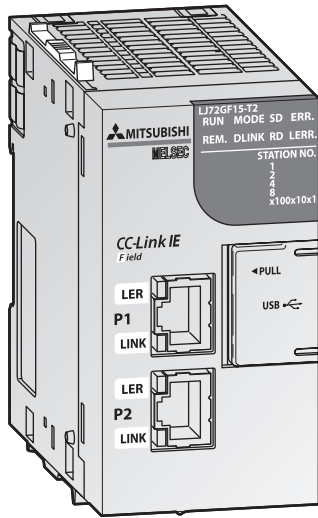

CC-Link IE field network head module and master/local station

MELSEC L series I/O and intelligent function modules can be connected to the remote I/O head module LJ72GF15-T2 without a dedicated CPU. There are many benefits to using intelligent device stations including reduced CPU and wiring costs, great flexibility in selecting I/O and intelligent function modules, and compact unit size.


The LJ71GF11-T2 can be used as master or local station for the network CC-Link IE Field. This Ethernet automation network enables data exchange with a transmission speed of up to 1 Gbit /

Special features:

- Wiring of the network with Ethernet cables
- Maximum transmission speed of 1 GB/s
- Simple parametrization and diagnosis with GX Work2
- RAS functions (Reliability, Availability, Serviceability) for system monitor, remote RESET and self diagnostics
- Simple parametrization and diagnosis with GX Work2
- A huge selection of CC-Link compatible devices can be connected.

Specifications	LJ72GF15-T2	LJ71GF11-T2
Module type	Intelligent device station	Master/local station
Max. no. of connected stations	120	
Max. overall cable distance	m 12000 (with 120 slave stations connected)	
Max. station to station distance	m 100	
Max. no. of link points	per network	16384 remote inputs, 16384 remote outputs, 8192 remote register (read/write)
	per station	2048 remote inputs, 2048 remote outputs, 1024 remote register (read/write)
Transmission speed	1 Gbps	
Transmission path	Star, line, mixed star and line, ring topology	
I/O points	—	
Internal power consumption	mA 1000	890
Weight	kg 0.23	0.27
Dimensions (WxHxD)	mm 50x90x95	45x90x95
Order information	Art. no. 238100	246346

Serial Communications Adapter

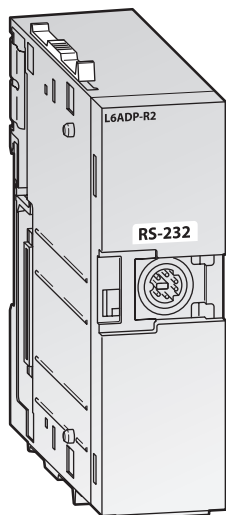


RS232 interface adapter

The L6ADP-R2 provides a RS232 interface for serial communication with the L series PLC.

Specifications	L6ADP-R2	
Application	Serial connection, e.g. GT10 Terminals	
Power supply	Internally	
Max. transfer rate	kbit/s	115.2
I/O points	—	
Internal power consumption	mA	20
Weight	kg	0.10
Dimensions (WxHxD)	mm	28.5x90x95
Order information	Art. no.	238059

End Cover

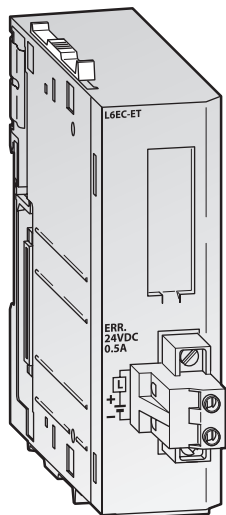

END cover with error terminal


This end cover can be used instead of the standard end cover which comes with the CPU in the basic equipment.

The L6EC-ET end cover has a single relay output for error notification.

Specifications	L6EC-ET	L6EC
Application	Error notification via relay output	Standard end cover
Output	Screw terminal	—
Max. switching load	A	—
Weight	kg	0.06
Dimensions (WxHxD)	mm	13x90x95
Order information	Art. no.	249151

Note: L Series CPU modules are supplied with a standard End Cover L6EC.

■ Accessories



Display module

The display module allows to check the system status and to make setting changes directly from the display, which will be built-in directly into the CPU.

Error status is clearly identified and troubleshooting and error investigation can be performed all without the need for any connections or engineering software.

Specifications	L6DSPU	
Application	Displaying menus, time, and monitoring data. Setting of values and parameters.	
Display	16 letters x 4 lines	
Power supply	From CPU	
Display	LCD with backlight (green/red)	
Language	English, Japanese	
Dimensions (WxHxD)	mm	45x50x17.3
Order information	Art. no.	238058




SD memory card

The SD memory card allows quick and easy back-up of the CPU program and parameters. It can also be used to hold data captured with the data logging function.

The card is selectively available with 2 GB and 4 GB capacity.

Specifications	L1MEM-2GBSD	L1MEM-4GBSD
Card type	SD memory card	SDHC memory card
Memory capacity	2 GB	4 GB
Order information	Art. no.	238060
		238061




Backup battery

Two different batteries as replacement for the built-in back-up battery are available for the L series CPU.

Specifications	Q6BAT	Q7BAT	Q7BAT-SET
Voltage	3.0	3.0	3.0
Capacity	1800 mAh	5000	5000
Scope of delivery	Battery	Battery	Battery plus holder
Order information	Art. no.	130376	204127
			204128

■ Branch/Extension Module

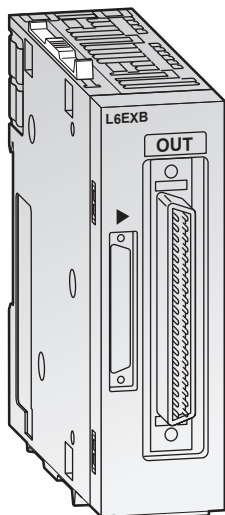


Extension for MELSEC L series PLC

With a L6EXB branch module, which is connected to the CPU, and with up to two (L02CPU, L02CP-P) or up to three extension

modules (L26CPU-BT, L26CPUPBT), a MELSEC L series PLC can be extended to max. 30/40 modules.

Specifications		L6EXB [Branch module]	L6EXE [Extension module]
Internal power consumption (5 V DC)	A	0.08	0.08
Weight	kg	0.12	0.13
Dimensions (WxHxD)	mm	28.5x90x95	28.5x90x95
Order information	Art. no.	247227	247226

■ Extension Cables

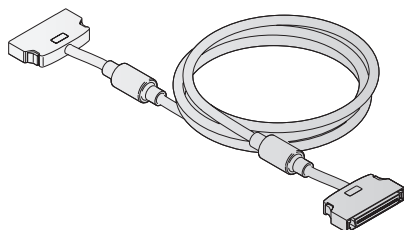


Connection between branch module and extension module

These cables connects a branch module with one or two extension modules.


Specifications		LC06E	LC10E	LC30E
Cable length	m	0.6	1.0	3.0
Weight	kg	0.19	0.23	0.45
Order information	Art. no.	247228	247229	247230

■ Power Supply

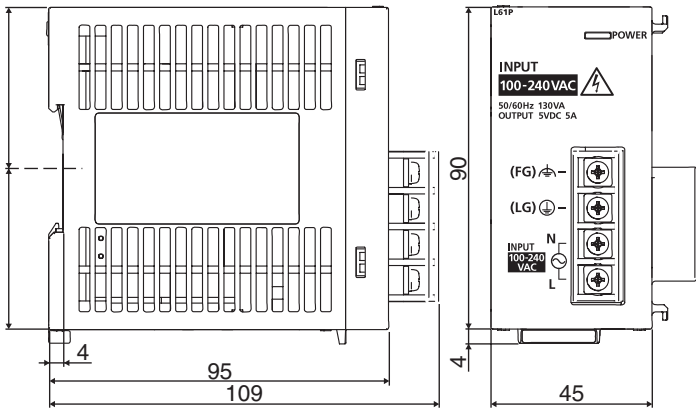

Unit mm


■ CPU Modules

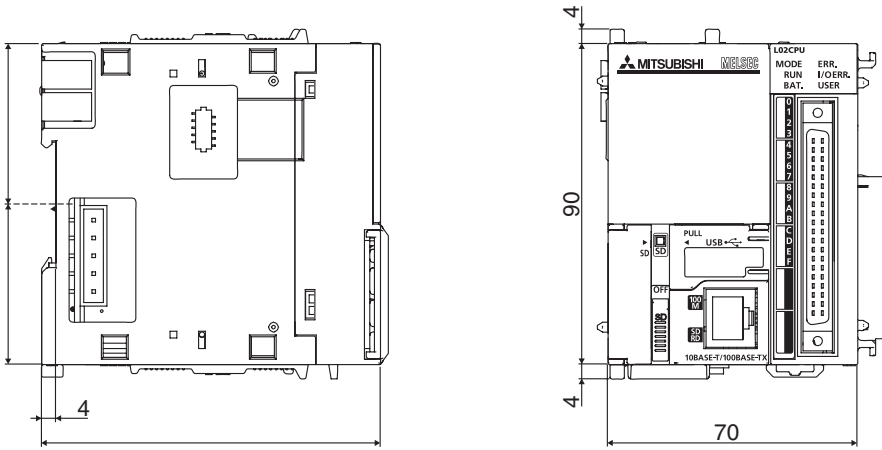

Type	W	H	D
L02CPU-P	70	90	95
L26CPU-PBT	98.5	90	95 (118)

Unit mm


■ I/O Modules, Special Function Modules

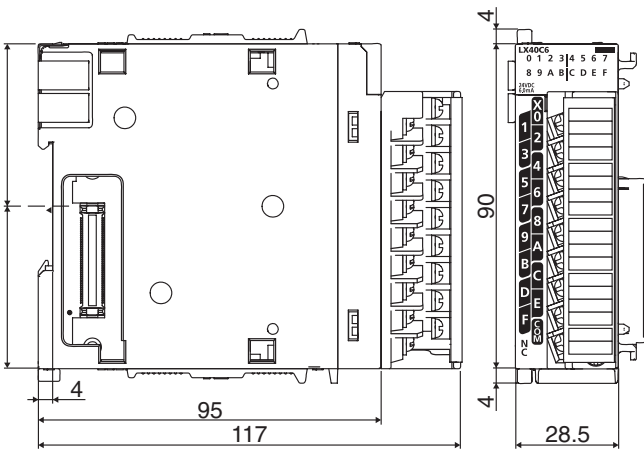

Unit mm


10 DIMENSIONS MELSEC L SERIES

■ Simple Motion and Positioning Modules

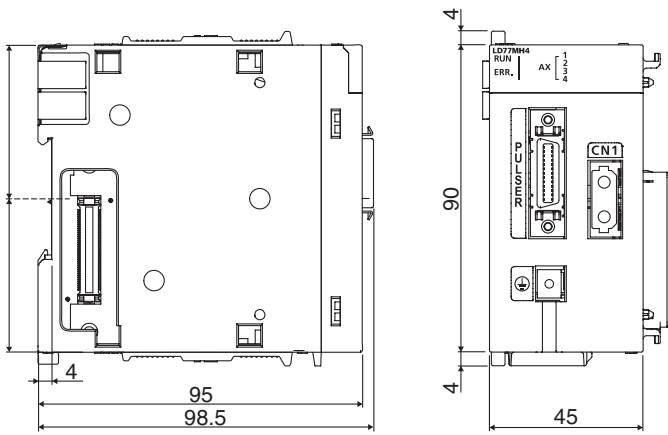


Unit mm

■ CC-Link IE Field Module

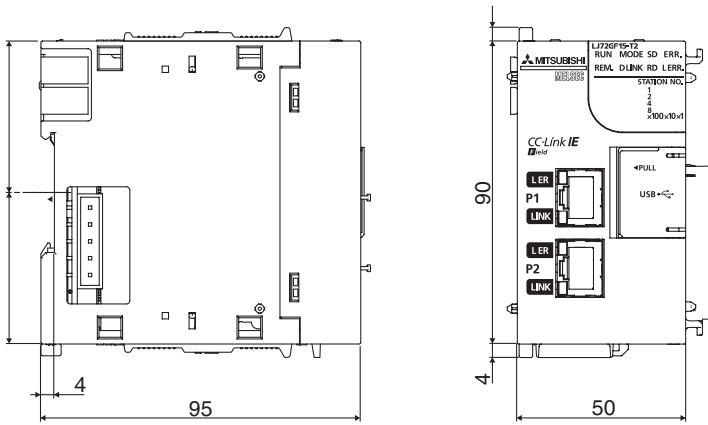


Unit mm

■ Display Module

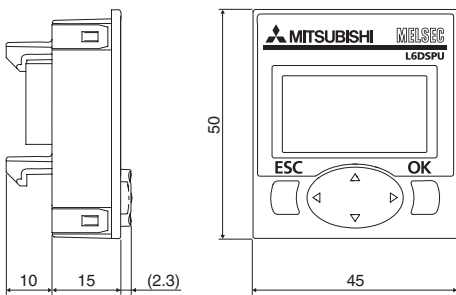

Unit mm

■ Extension Cables

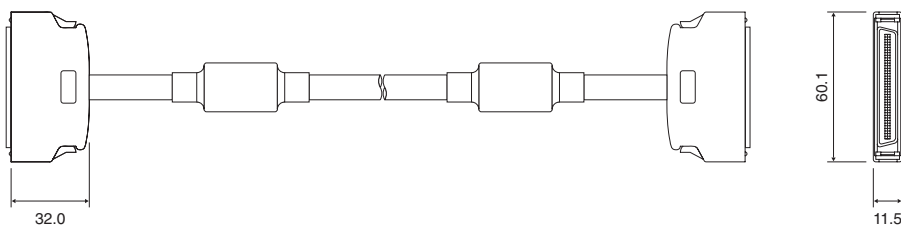

Unit mm

MELSOFT – Programming and Documentation Software for Standard Personal Computers



With the MELSOFT software family Mitsubishi Electric offers efficient software packages helping to reduce programming and setup times to a high degree.

The MELSOFT software family provides instant access, direct communications, compatibility, and open exchange of variables.

The MELSOFT family comprises:

- Programming packages like GX Developer, GX IEC Developer and GX Works 2
- Visualization software like for example MAPS
- Network configuration software like for example GX Configurator DP and GX Configurator PN
- Various development software for operator terminals GT Works3 and GT Soft-GOT1000

GX Works2 is recommended as a cost-effective beginners package for the MELSEC System Q. This package offers a quick and easy introduction to programming.

For structured programming the IEC 1131 (EN 61131) conform programming software GX IEC Developer is recommended.

For detailed information please order our separate MELSOFT brochure.

■ Unified Engineering Environment: iQ Works

iQ Works integrates the functions necessary to manage every part of the system cycle.

System design

The intuitive system configuration diagram allows for the graphic assembly of systems, centralized management of disparate projects and batch configuration of the entire control system.

Programming


Use system labels to seamlessly share device data between GOTs, PLCs and motion controllers. Save the time and hassle of changing device values in each program by using the update system labels feature.

Test and startup

Debug and optimize programs using the simulation functions. Use the included diagnostics and monitoring functions to quickly identify the source of errors.

Operation and maintenance

Speed up the process of commissioning, configuring and updating the system by using the batch read feature. Virtually eliminate the confusion associated with system management.

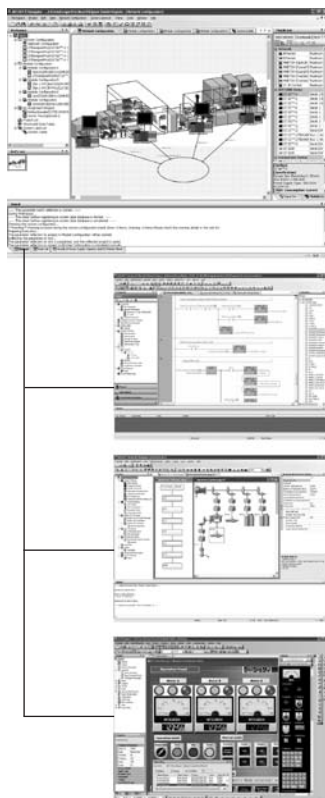

MELSOFT Navigator

is the heart of iQ Works. It enables the effortless design of entire upper-level systems and seamlessly integrates the other MELSOFT programs included with iQ Works. Functions such as system configuration design, batch parameter setting, system labels and batch read all help to reduce TCO.

MELSOFT GX Works2

represents the next generation in MELSOFT PLC maintenance and programming software. Its functionality has been inherited from both GX and IEC Developer, with improvements made throughout to increase productivity and drive down engineering costs.

MELSOFT MT Works2

is a comprehensive motion CPU maintenance and program desing tool. Its many useful functions, such as intuitive settings, graphical programming and digital oscilloscope, simulator, different Motion OS support, assistance help, to reduce the MT Works2 associated with motion systems.

MELSOFT GT Works3

is a complete HMI programming, screen creation and maintenance program. In order to reduce the labor required to create detailed and impressive applications, the software's functionality has been built around the concepts of ease of use, simplifications (without sacrificing functionality) and elegance (in design and screen graphics).

■ GX Works2




GX Works2 is the PLC programming environment of the next generation. It supports all PLC of the MELSEC System Q, MELSEC L and FX series and offers numerous functions to facilitate programming work and support the user.

- Integrated parameterization of special function modules (analog, temperature, positioning, counter, network)
- Use of program and function block libraries save time for programming and minimizes errors.
- Integrated simulation allows offline testing of the software and the configuration.

- Comprehensive diagnostics and debugging functions support the user in troubleshooting and fault clearance.
- Revision verification and restoration makes it possible to restore old program versions or to compare with programs from the PLC.
- GX Works2 is compatible with GX Developer and GX IEC Developer projects (as far as the editors are supported)

Software	GX Works2 V01-2LOC-E	GX Works2 V01-5LOC-E	GX Works2 V01-2LOC-E-UPGRADE	GX Works2 V01-5LOC-E-UPGRADE	GX Works2 V01-2LOC-E-INTRODUCTION	GX Works2 FX V01-2LOC-E	GX Works2 FX V01-2LOC-E-INTRODUCTION
Series	All					FX series	
Language	German/English					English	
Order information	Art. no. 234630	234631	234632	234634	234789	255804	256745

■ GX Developer

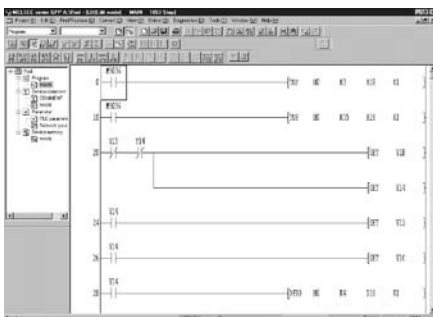

GX Developer is the standard programming software for all MELSEC PLC series with the user guidance of Microsoft Windows®.

With this software you can comfortably create PLC programs alternatively in the form of Ladder Diagrams or Instruction Lists. Both forms of representation can be toggled easily during operation.

Besides efficient monitoring and diagnostics functions GX Developer features an offline simulation of any PLC type.

With GX Developer all MELSEC PLCs from the FX1S to the Q25H (MELSEC System Q) are supported. The use of GX Developer FX is limited to the PLCs of the FX family.


This software provides all the Windows®-specific advantages and is especially suited to all MELSEC PLCs.

GX Developer can be run under MS Windows® XP and Vista.

The software is supplied without a programming cable, which has to be ordered separately if required and which is used for the connection between the PLC and a serial interface of a personal computer.

Software	GX Developer V0800-1LOC-G	GX Developer V0800-1LOC-E	PX Developer V0100-1LOE-E
Series	All MELSEC PLCs	All MELSEC PLCs	Optional for process CPUs in combination with GX Developer
Language	German	English	English
Order information	Art. no. 152816	150420	162370
Accessories	Programming cable QC30R2, art. no.: 128424; QC30-USB, art. no.: 136577		

■ GX IEC Developer

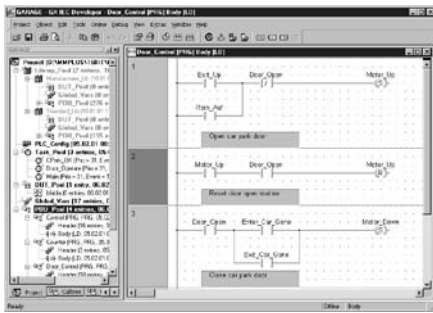

GX IEC Developer provides all functions of the pre-mentioned programs and in addition meets the programming standard for the future: IEC 1131.3 (EN 61131). This makes the software ready for the programming standard of the future and offers as a basis for the on-leading programming of the MELSEC A series and MELSEC System Q.

GX IEC Developer can be run under MS Windows® XP and Vista.

The software is supplied without a programming cable, which has to be ordered separately if required and which is used for the connection between the PLC and a serial interface of a personal computer.

Software	GX IEC DEVELOPER V0704-1LOC-G	GX IEC DEVELOPER V0704-1LOC-E
Series	All MELSEC PLCs	All MELSEC PLCs
Language	German	English
Order information	Art. no. 230801	230836
Accessories	Programming cable QC30R2, art. no.: 128424; QC30-USB, art. no.: 136577	

Software for Process Visualisation and for Dynamic Data Exchange

■ MX OPC Server



The OPC standard was developed for manufacturer independent communications between processes and Microsoft Windows® applications in client/server architecture.


OPC means "OLE for Process Control" and represents an application of the Microsoft DCOM technology (Distributed Component Object Model). In contrast to Active-X the OPC based data exchange especially features a higher performance.

The MX OPC server is a standardized software interface that enables Microsoft Windows® applications to access a Mitsubishi Electric PLC quick and easily.

MX OPC Server can be run under MS Windows® XP and Vista.

Software	MX OPC Server V0600-1LOC-E
Series	All MELSEC PLCs
Language	English
Disk type	CD ROM
Order information	Art. no. 221608

■ MX Components

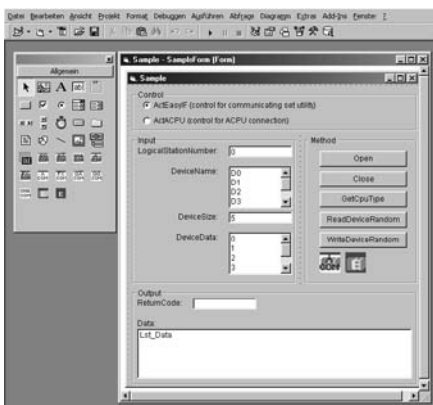

This software provides you with powerful Active-X elements. An internal driver manages the complete communications between your Microsoft Windows® application and your process. Via MX components and a programming language (e.g. Visual Basic, Visual C++, etc.) you can easily create your own PC applications or integrate existing PC applications.

Moreover, via MX Components and VBA the complete MS Office range is at your service. Without high effort you can integrate online process data of a Mitsubishi Electric PLC in your existing office software (e.g. MS Access or MS Excel etc.).

MX Components can be run under MS Windows® XP and Vista.

Software	MX Components V0300-1LOC-E
Series	All MELSEC PLCs
Language	English
Disk type	CD ROM
Order information	Art. no. 145309

Software for Profibus Networks

■ GX Configurator DP



The Software GX Configurator DP is a user friendly configurations software for the open network Profibus DP.

The software package is a 32 bit application and runs under MS Windows® XP and Vista. Configuration of all Profibus modules for the MELSEC System Q, AnSH/QnAS series and also the FX family is possible.

Due to the supported extended user parameters of a GSD file, easy parameter setting of Profibus DP slave devices is possible even for third party devices.

The new GX Configurator DP enables the download of all configuration data via an overriding network.

Software	GX Configurator DP V07-1LOC-M	
Supported Profibus DP master modules for the Mitsubishi Electric MELSEC series	A1SJ71PB92D, QJ71PB92D, QJ71PB92V	
Language	English/German	
Version	7.04	
Order information	Art. no.	231731
Accessories	Programming cable QC30R2, art. no.: 128424; QC30-USB, art. no.: 136577	

■ GX Configurator PN



GX Configurator PN is the configuration tool for Profinet I/O modules. This software offers functions for the configuration of the Profinet I/O network, testing the configuration and transfer of the settings to the Profinet module.

When transferring the parameter data, GX Configurator PN offers a variety of capabilities. The Profinet module can be on the base unit, where the PC is connected directly or also in another PLC within the network.

Profinet I/O slave devices are configured by GSD files, which are provided by the device manufacturers.

The software is available as 32 bit version for MS Windows® XP, Vista and MS Windows® 7.

Software	GX Configurator PN V01-1LOC-E	
Supported Profinet module for the Mitsubishi Electric MELSEC series	ME1PN1FW-CCPU	
Language	English	
Version	1.02	
Order information	Art. no.	255245

MELSEC L Series

- Accessories
 - Batteries 84
 - Branch/extension module 85
 - Display module 84
 - Extension cables 85
 - Memory cards 84
- Basic components
 - CPU modules 70
 - Power supply modules 69
- Digital modules
 - Input modules 71
 - Output modules 72
- Dimensions
 - CPU modules 86
 - Display module 87
 - Extension cables 87
 - I/O modules 86
 - Network Module 87
 - Positioning modules 87
 - Power supply 86
 - Simple Motion modules 87
 - Special function modules 86
- Special function modules
 - Analog modules 74
 - Counter modules 77
 - End Cover 83
 - Interface modules 78
 - IO-Link module 73
 - Network modules 81
 - Positioning modules 79
 - Serial communication adapter 83
 - Simple motion modules 80
 - Temperature control modules 76
- System description
 - Configuration and handling 66
 - Introduction 65


MELSEC System Q

- Accessories
 - Adapter 58
 - Batteries 59
 - Cables 56
 - Connectors 57
 - Dummy module 55
 - ERNT – conversion adapters 55
 - Memory cards 58
 - Terminal blocks 60
- Basic components
 - Base units 16
 - CPU modules 19
 - Power supply modules 18
- Digital modules
 - Input modules 28
 - Output modules 30
- Dimensions
 - Base units 61
 - Connectors 64
 - CPU modules 61
 - I/O modules 63
 - Power supply modules 61
 - Safety 62
 - Special function modules 63
 - Terminal block adapters 64
- Special function modules
 - Analog CT input module 39
 - Analog modules 32
 - Counter modules 41
 - High speed data logger module 52
 - Interface modules 47
 - Interrupt module and high-speed inputs 54
 - Load cell module 38
 - Loop control module 40
 - Multi-function counter/timer module 53
 - Network modules 49
 - Positioning modules 42
 - Temperature control modules 37
- System description
 - Configuration and handling 12
 - Introduction 6
 - Networks 14

Programming systems

- Programming
 - iQ Works 88
 - Profibus software 91
 - Software 88
 - Visualisation software 90

A world of automation solutions

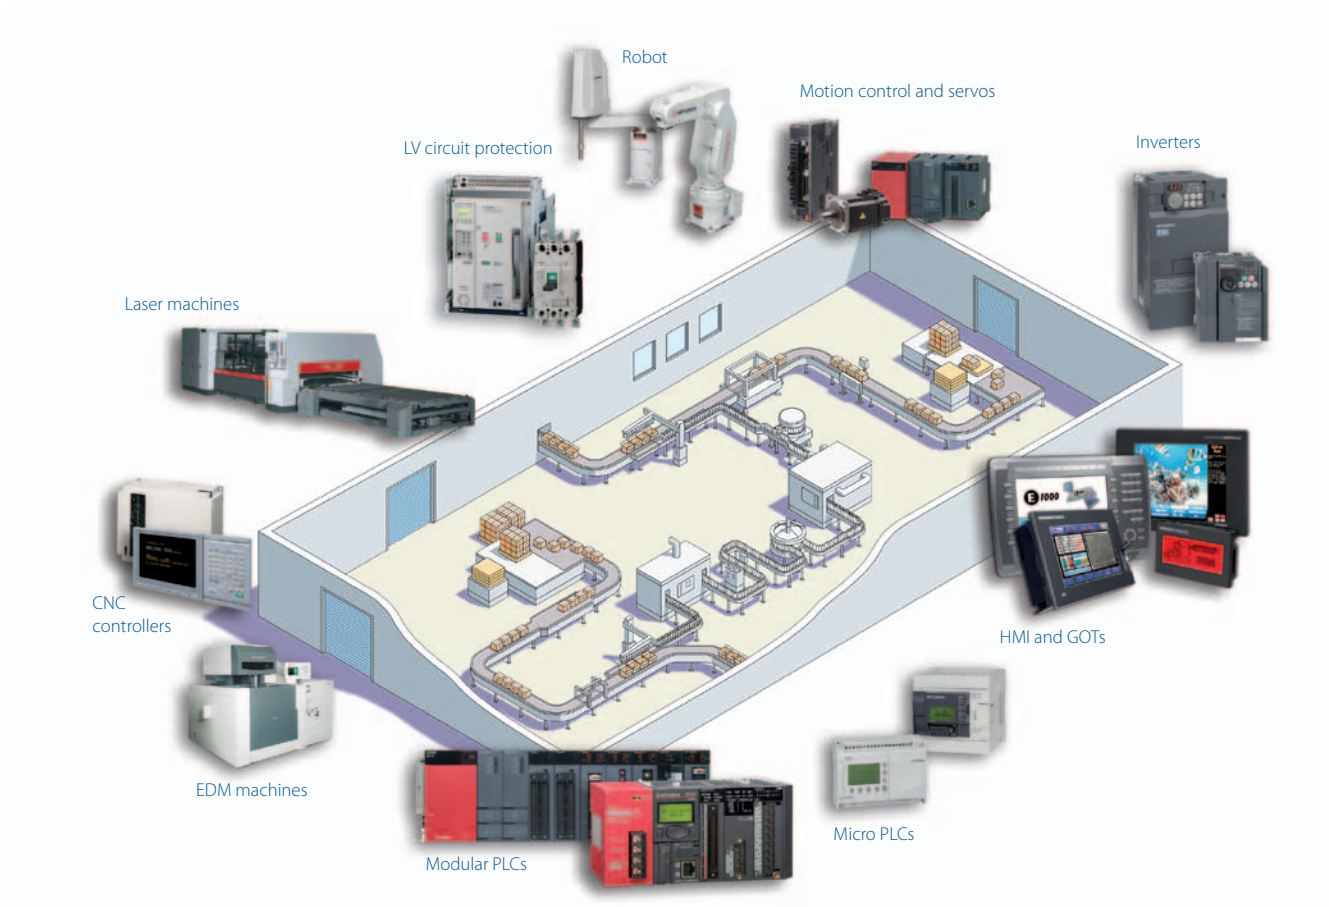

Mitsubishi Electric offers a wide range of automation equipment from PLCs and HMIs to CNC and EDM machines

A name to trust

Since its beginnings in 1870, some 45 companies use the Mitsubishi Electric name, covering a spectrum of finance, commerce and industry.

The Mitsubishi Electric brand name is recognized around the world as a symbol of premium quality.

Mitsubishi Electric Corporation represents space development, transportation, semi-conductors, energy systems, communications and information processing, audio visual equipment, home electronics, building and energy management and automation systems, and has 237 factories and laboratories worldwide in over 121 countries.

This is why you can rely on a Mitsubishi Electric automation solution – because we know first hand about the need for reliable, efficient, easy-to-use automation and control.

As one of the world's leading companies with a global turnover of 4 trillion Yen (approximately \$40 billion), employing over 100,000 people, Mitsubishi Electric has the resource and the commitment to deliver the ultimate in service and support as well as the best products.

Global partner. Local friend.

European Branches

Mitsubishi Electric Europe B.V. Gothaer Straße 8 D-40880 Ratingen Phone: +49 (0)2102 / 486-0	Germany
Mitsubishi Electric Europe B.V.-org.sl. Radlická 714/113a CZ-158 00 Praha 5 Phone: +420 - 251 551 470	Czech Rep.
Mitsubishi Electric Europe B.V. 25, Boulevard des Bouvets F-92741 Nanterre Cedex Phone: +33 (0)1 / 55 68 55 68	France
Mitsubishi Electric Europe B.V. Viale Colleoni 7 I-20041 Agrate Brianza (MB) Phone: +39 039 / 60 53 1	Italy
Mitsubishi Electric Europe B.V. Krzakowska 50 PL-32-083 Balice Phone: +48 (0)12 / 630 47 00	Poland
Mitsubishi Electric Europe B.V. 52, bld. 3 Kosmodamenskaya nab 8 floor RU-115054 Moscow Phone: +7 495 721-2070	Russia
Mitsubishi Electric Europe B.V. Carettera de Rubi 76-80 E-08190 Sant Cugat del Valles (Barcelona) Phone: 902 131211 // +34 935653131	Spain
Mitsubishi Electric Europe B.V. Travellers Lane UK-Hatfield, Herts. AL10 8XB Phone: +44 (0)1707 / 27 61 00	UK

Representatives

GEVA Wiener Straße 89 AT-2500 Baden Phone: +43 (0)2252 / 85 55 20	Austria	AutoCont C.S. s.r.o. Technologická 374/6 CZ-708 00 Ostrava-Pustkovec Phone: +420 595 691 150	Czech Republic	Beijer Electronics SIA Ritauzmas iela 23 LV-1058 Riga Phone: +371 (0)784 / 2280	Latvia	Beijer Electronics AS Postboks 487 NO-3002 Drammen Phone: +47 (0)32 / 24 30 00	Norway	INEA RBT d.o.o. Steone 11 SI-1000 Ljubljana Phone: +386 (0)1 / 513 8116	Slovenia	I.C. SYSTEMS LTD. 23 Al-Saad-Al-Alee St. EG - Sarayat, Maadi, Cairo Phone: +20 (0) 2 / 235 98 548	Egypt
TECHNIKON Oktyabrskaya 19, Off. 705 BY-220030 Minsk Phone: +375 (0)17 / 210 46 26	Belarus	Beijer Electronics A/S Lykkegårdsvej 17 DK-4000 Roskilde Phone: +45 (0)46 / 75 76 66	Denmark	Beijer Electronics UAB Savanoriu Pr. 187 LT-02300 Vilnius Phone: +370 (0)5 / 232 3101	Lithuania	Fonseca S.A. R. João Francisco do Casal 87/89 PT - 3801-997 Aveiro, Esqueira Phone: +351 (0)234 / 303 900	Portugal	Beijer Electronics AB Box 426 SE-20124 Malmö Phone: +46 (0)40 / 35 86 00	Sweden	ILAN & GAVISH Ltd. 24 Shenkar St., Kiryat Arie IL-49001 Petah-Tiqva Phone: +972 (0)3 / 922 18 24	Israel
ESCO D & A Culliganlaan 3 BE-1831 Diegem Phone: +32 (0)2 / 717 64 30	Belgium	Beijer Electronics Eesti OÜ Pärnu mnt.160H EE-11317 Tallinn Phone: +372 (0)6 / 51 81 40	Estonia	ALFATRADE Ltd. 99, Paola Hill Malta- Paola PLA 1702 Phone: +356 (0)21 / 697 816	Malta	Sirius Trading & Services Aleea Lacul Morii Nr. 3 RO-060841 Bucuresti, Sector 6 Phone: +40 (0)21 / 430 40 06	Romania	Omni Ray AG Im Schöri 5 CH-8600 Dübendorf Phone: +41 (0)44 / 802 28 80	Switzerland	GIRIT CELADON LTD 12 Haomanut Street IL-42505 Netanya Phone: +972 (0)9 / 863 39 80	Israel
Koning & Hartman b.v. Woluwelaan 31 BE-1800 Vilvoorde Phone: +32 (0)2 / 257 02 40	Belgium	Beijer Electronics OY Peltolä 37 FIN-28400 Ulvila Phone: +358 (0)207 / 463 540	Finland	INTEHSIS srl bld. Traian 23/1 MD-2060 Kishinev Phone: +373 (0)22 / 66 4242	Moldova	INEA RBT d.o.o. Izletnicka 10 SER-113000 Smederevo Phone: +381 (0)26 / 615 401	Serbia	GTS Bayraktar Bulvari Nutuk Sok. No5 TR-34775 Yukan ISTANBUL Phone: +90 (0)216 526 39 90	Turkey	CEG INTERNATIONAL Cebaco Center/Block A Autostrade DORA Lebanon - Beirut Phone: +961 (0)1 / 240 430	Lebanon
INEA RBT d.o.o. Aleja Lipa 56 BA-71000 Sarajevo Phone: +387 (0)33 / 921 164	Bosnia and Herzeg.	UTECO S. Mavrogenous Str. GR-18542 Piraeus Phone: +30 211 / 1206 900	Greece	HIFLEX AUTOM. B.V. Jána Derku 1671 NL-9111 OT Trenchin Phone: +421 (0)32 743 04 72	Netherlands	SIMAP s.r.o. Jána Derku 1671 SK-9111 OT Trenchin Phone: +421 (0)32 743 04 72	Slovakia	CSC Automation Ltd. 4-B, M. Raskovoyi St. UA-02660 Kiev Phone: +380 (0)44 / 494 33 55	Ukraine	CBI Ltd. Private Bag 2016 ZA-1600 Isando Phone: +27 (0)11 / 977 0770	South Africa
AKHNATON 4, Andrei Lipachev Blvd., PO Box 21 BG-1756 Sofia Phone: +359 (0)2 / 817 6000	Bulgaria	MELTRADE Kft. Fertő utca 14. HU-1107 Budapest Phone: +36 (0)1 / 431-9726	Hungary	Koning & Hartman b.v. Haarkebergweg 21-23 NL-1101 CH Amsterdam Phone: +31 (0)20 / 587 76 00	Netherlands	PROCONT, spol. s r.o. Prešov Kápeľná 1/A SK-080 01 Prešov Phone: +421 (0)51 7580 611	Slovakia				
INEA RBT d.o.o. Loshinjska 4 a HR-10000 Zagreb Phone: +385 (0)1 / 36 940 -01/-02/-03	Croatia	TOO Kazpromavtomatika III. Zhambylta 28 KAZ-100017 Karaganda Phone: +7 7212 / 50 10 00	Kazakhstan								



Version check

Mitsubishi Electric Europe B.V. / FA - European Business Group / Gothaer Straße 8 / D-40880 Ratingen / Germany / Tel.: +49(0)2102-4860 / Fax: +49(0)2102-4861120 / info@mitsubishi-automation.com / www.mitsubishi-automation.com

Art. no. 260570-A / 02.2013 / Specifications subject to change / All trademarks and copyrights acknowledged.

